



**HAL**  
open science

## Phase change material based reconfigurable transmitarray: a feasibility study

Samara Gharbieh, Antonio Clemente, Jorick Milbrandt, Bruno Reig

► **To cite this version:**

Samara Gharbieh, Antonio Clemente, Jorick Milbrandt, Bruno Reig. Phase change material based reconfigurable transmitarray: a feasibility study. EuCAP 2022 - The 16th European Conference on Antennas and Propagation, Mar 2022, Madrid, Spain. cea-03637061

**HAL Id: cea-03637061**

**<https://cea.hal.science/cea-03637061v1>**

Submitted on 11 Apr 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Phase Change Material Based Reconfigurable Transmitarray: a Feasibility Study

Samara Gharbieh, Antonio Clemente, Jorick Milbrandt, Bruno Reig  
CEA-Leti, Univ. Grenoble Alpes, F-38000 Grenoble, France  
e-mail: {samara.gharbieh, antonio.clemente, jorick.milbrandt, bruno.reig}@cea.fr

**Abstract**—In this paper, we present the design of a reconfigurable transmitarray operating in the D-band (110 – 170 GHz). The transmitarray unit cell has a relatively simple structure with three metal layers and two quartz dielectric substrates. The active transmitting patch of the unit cell ensures a 1-bit phase shift resolution by alternating the states of two innovative switches. Here, we overcome the small dimensions challenge in the D-band by introducing compact switches that are compatible with the dimensions of the proposed unit cell. The switches are made of phase change materials (PCM) that alternate between the amorphous and the crystalline states under the effect of heat. We present a full-wave simulation of the unit cell, which shows an insertion loss that is below 1.5 dB over a relative frequency band of 27%. Furthermore, we synthesize a 16×16 elements transmitarray using an in-house MATLAB tool and compare its theoretical results to a full-wave HFSS simulation. The outcome shows that by integrating the proposed switches into the unit cell, the designed transmitarray can achieve promising reconfiguration results in the D-band.

**Index Terms**—transmitarray, electronically beamforming, beam scanning, phase change materials.

## I. INTRODUCTION

Transmitarray (TA) antennas gained popularity in various microwave and millimeter-wave applications due to their advantages in terms of high-gain and efficiency compared to classical phased arrays [1]. The most important feature of the TA is the possibility to implement relatively simple and low-loss reconfigurability functions, providing real time beam scanning and beamforming. This is realized generally by integrating elements with tuning properties on the array elements (also indicated as unit cells). Until now, the most popular devices used to control the transmission phase shift of the unit-cells are varactor diodes [2], RF-MEMS [3], and p-in diodes [4]. The varactor diodes provide continuous and accurate phase change, but they lack of limited bandwidth (less than 10%). In order to enhance the bandwidth, limited phase resolution of 1- or 2-bit can be implemented using MEMS, p-in diodes, or other switch technologies.

Even if several reconfigurable TA prototypes have been demonstrated in the open literature up to Ka-band (26 – 40 GHz) [3], [4], only preliminary studies have been proposed to achieve electronically beam scanning at higher frequencies [5]. In this paper, we focus on designing a reconfigurable TA at D-band (110 – 170 GHz) for application to the future high-data rate Beyond 5G networks. The investigation on designing TA in this frequency band is still at an early stage and today only fixed-beam solutions have been proposed [6]-[8].The

40×40 element TA at 140 GHz proposed in [6] has a peak gain of 33 dBi and -1 dB gain bandwidth of 10.7%. The stack up of the mentioned TA is made of seven metal layers and thousands of vias, which make it bulky and complex. Another TA design using standard PCB (printed circuit board) technology with two metal layers is presented in [7]. The simplified design comes at the sake of a decreased bandwidth (-1 dB gain bandwidth of 6.8%) and aperture efficiency (32%). A passive TA with a gain higher than 30 dBi and better performances in terms of -1dB gain bandwidth (11.7%) is presented in [8]. The main challenge in designing reconfigurable TA antennas at millimeter-wave frequencies (50 – 300 GHz) is in introducing an active element that is compatible with the small dimensions of the unit cell and presents at same time an acceptable  $R_{on}/C_{off}$  ratio.

In this work, in order to overcome the aforementioned challenge, we propose to use a phase change material (PCM) based RF switch. GeTe (Germanium Telluride) is selected due to its advantages at high frequencies such as stability and power handling capabilities. The proposed GeTe switch technology was previously developed in [9]. Here, an optimized design is presented to be compatible with the D-band unit cell requirements. Despite PCMs have been recently proposed to develop reconfigurable antennas [10]- [12], this work represents the first feasibility study of their application to TA antennas. A 1-bit unit cell (i.e. two phase states with 180° of relative phase shift) operating in the D-band is designed and optimized. The reconfiguration is ensured integrating on the radiating element two GeTe switches. The proposed unit cell is used to synthesize a TA composed of 16×16 unit cells. The full antenna has been optimized using an in-hose MATLAB tool. Full-wave simulations have been performed to validate our design.

The paper is organized as follows. In Section II, we present the GeTe switches, the unit-cell architecture, and corresponding simulation results. The optimized TA illuminated by a 10-dBi horn is presented in Section III. We conclude the paper in Section IV with some ideas for future research.

## II. UNIT CELL PRINCIPLE, DESIGN, AND SIMULATION RESULTS

### A. Germanium telluride (GeTe) switches

The proposed PCM switch technology uses GeTe with direct heating actuation. A PCM changes in nanosecond

timeslots from amorphous to crystalline state following an application of thermal, electrical or optical stimuli, thus changing its electrical properties. For instance, the GeTe is heated at a temperature  $T_1$ , that is lower than the fusion temperature and higher than crystallization one, during a period  $d_1$  (between 10 to 100ns) in order to change phase from amorphous to crystalline. For the GeTe to change phase from crystalline to amorphous, it is heated at a temperature  $T_2$ , that is higher than the fusion one, and for a duration  $d_2$  in the order of 10ns. This switching phenomenon could be useful to integrate PCM materials in reconfigurable devices and antennas. In Fig. 1, we show the way to deposit the GeTe material and the stack up. A cube of  $l_s \times w_s \times h_s$  of GeTe is placed on the top of a metal alloy aluminum copper (AlCu) (see TABLE I). A gap of  $w_g$  separates the two branches of the metal. The metal should be embedded in a layer of an insulator as the silicon dioxide and the GeTe in a layer of silicon nitrate; their properties are depicted in TABLE I.

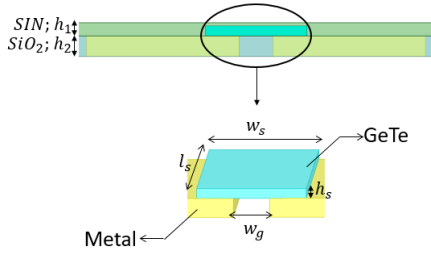


Fig. 1. Proposed GeTe switch technological stack-up.

It is noteworthy to mention that with the presented structure the GeTe changes its electrical properties drastically when changing from amorphous to crystalline state. The geometrical parameters have been defined to achieve the required  $R_{on}/C_{off}$ . If we designate the amorphous state as GeTe\_OFF (equivalent to a capacitance of  $C_{off} = 10fF$ ) and the crystalline state as GeTe\_ON (equivalent to a resistance of  $R_{on} = 1\Omega$ ), it is seen that their resistivity is changing in the order of  $10^5$ (TABLE I).

TABLE I. GETE PROPERTIES

Electrical Constants					
$SiO_2$	$SiN$	$GeTe_{ON}$	$GeTe_{OFF}$		
$\epsilon_r: 7$	$\epsilon_r: 4$	$\epsilon_r: 36$	$\epsilon_r: 36$		
		$\sigma: 1.85 \cdot 10^5 S/m$	$\sigma: 1.85 S/m$		
Geometrical Parameters in mm					
$w_g$	$w_s$	$l_s$	$h_s$	$h_1$	$h_2$
$1 \cdot 10^{-3}$	$3 \cdot 10^{-3}$	$2 \cdot 10^{-2}$	$3 \cdot 10^{-4}$	$4 \cdot 10^{-4}$	$6 \cdot 10^{-4}$

### B. Unit cell stack up and simulation results

The proposed transmitarray unit cell (Fig. 2) consists of a wafer-like topology. The unit cell is thus made of three metal layers (passive patch antenna, ground plane, and active patch antennas with PCM switches), which are separated by two quartz glass dielectric with the thickness of  $h_q$  and the following electrical properties:  $\epsilon_r = 3.78$  and  $\tan \delta = 0.0001$ .

The unit cell is optimized in the D-Band and thus the periodicity  $P$  is set to be equivalent to  $\lambda/2$  at the central frequency of 140 GHz. The active transmitting rectangular patch is printed on a AlCu layer ( $w_p \times l_p$ ) and placed on the top of the dielectric stack-up. It is loaded by an O-slot, on the left and the right two GeTe switches are inserted respecting the layered stack-up already explained in Section II.A and shown in Fig. 1. This configuration of the GeTe switches allows obtaining a symmetrical behavior of the scattering parameter magnitudes with a  $180^\circ$  degrees phase shift while alternating the ON (crystalline) and the OFF (amorphous) states. In this way a 1-bit unit-cell design is achieved. The transmitting patch is connected by a metalized via hole (diameter of  $\phi_v$ ) to a passive receiving patch printed on the bottom layer. The passive patch antenna is rectangular ( $w_p \times l_p$ ) and is loaded by a U-slot. It is connected to the ground plane, which is placed in the intermediate layer, with two vertical via holes (diameter of  $\phi_v$ ) for biasing purposes. The detailed structure geometrical parameters of the unit cell are summarized in TABLE II.

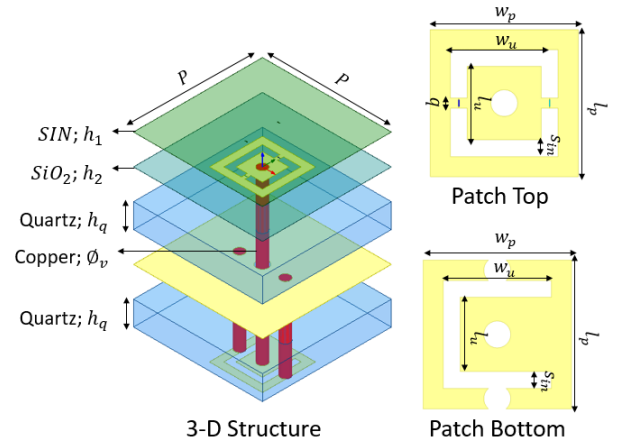



Fig. 2. 1-bit electronically reconfigurable unit-cell, the transmitting and the receiving patche designs.

TABLE II. UNIT CELL STRUCTURE


Geometrical Parameters in mm								
$h_q$	$\phi_v$	$P$	$w_p$	$l_p$	$w_u$	$l_u$	$s_{in}$	$b$
0.2	0.08	1.07	0.44	0.44	0.32	0.22	0.05	0.03

The proposed unit-cell performances are studied using full-wave simulations (Ansys-HFSS) with periodic boundary conditions and Floquet ports. The purpose of the simulation is to demonstrate the capacity of the unit cell with GeTe switches to reconfigure in two different phase states (called 000 and 180). The transmission ( $S_{21}$ ) and reflection ( $S_{11}$  and  $S_{22}$ ) coefficient magnitudes for the phase states 000 (black plots) and 180 (red plots) are presented in Fig. 3(a). This figure shows that the cell exhibits 0.69 dB insertion loss at 140 GHz. The insertion losses are lower than 1.5 dB over a 27% bandwidth. In TABLE III, the performances of the unit cell in terms of insertion losses are detailed. In Fig. 3(b), the phases

of  $S_{21}$  for the two unit cell states and the phase difference ( $\Delta\phi$ ) are shown. It is seen from the plots that the unit cell can produce two phase states with low insertion losses and a phase difference of  $180^\circ$  over a relatively large frequency range.

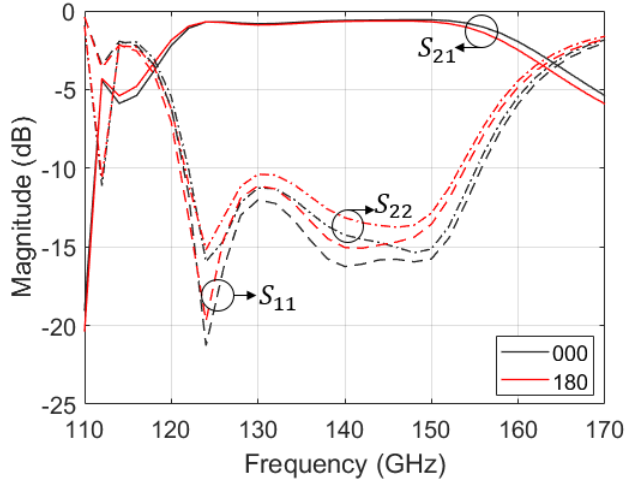

(a)

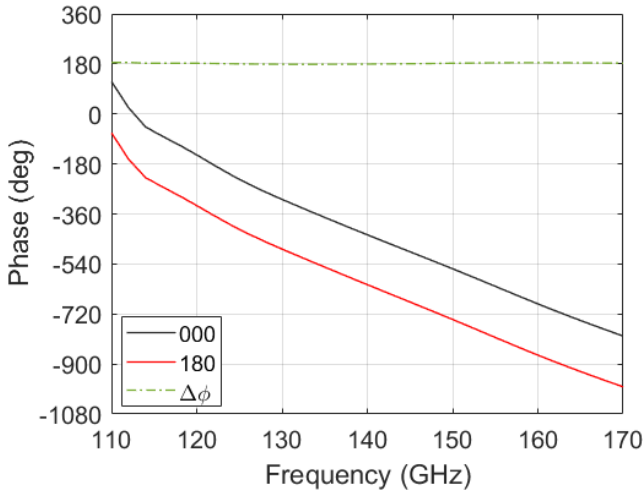

(b)

Fig. 3. Simulated scattering parameters of the proposed reconfigurable unit cell with PCM RF switches. Magnitude of the transmission and reflection coefficients (a) and phase of the transmission coefficients (b) for the phase states 000 and 180. The achieved relative phase shifter ( $\Delta\phi$ ) is also reported in (b).

TABLE III. UNIT CELL PERFORMANCES

At the central frequency (140GHz)			
in dB	$S_{21}$	$S_{11}$	$S_{22}$
	-0.69	-16.25	-14.25
Bandwidths			
$S_{21}:-1dB$	$S_{21}:-3dB$	$S_{11}:-10dB$	
24.5%	32%	26%	

### III. ELECTRONICALLY RECONFIGURABLE TRANSMITARRAY SYNTHESIS AND SIMULATION RESULTS

A transmitarray of  $16 \times 16$  elements is synthesized using an in-house MATLAB tool. The building block of the transmitarray is the electronically reconfigurable unit cell proposed in Section III.B. The tool generates the phase distribution starting from the full-wave HFSS simulation of each state of the unit cell (000 and 180) and using a ray-tracing solver. In order to collimate the beam towards a specific direction, theoretically, a  $360^\circ$  phase range tuning is preferable for each unit cell on the aperture of the TA. Since the designed unit cell provides two phase states ( $0^\circ$  and  $180^\circ$ ), thus a discrete phase quantization is used to approximate the ideal phase distribution, and then the array layout is defined accordingly. The quantization rule  $Q$  is expanded in (1)

$$Q(\angle S_{21}^j) = \begin{cases} 0^\circ, & \text{if } -\frac{\pi}{2} \leq \angle S_{21}^j < \frac{\pi}{2} \\ 180^\circ, & \text{otherwise} \end{cases} \quad (1)$$

where  $\angle S_{21}^j$  is the required phase shift for the  $j$  cell of the transmitarray.

Using the aforementioned tool, the phase distributions for two steering angles are generated: i) broadside transmission, ii) transmission towards  $30^\circ$ . The directivity and the gain of the TA radiating at broadside and calculated using the MATLAB tool are presented in Fig. 4. The gain at the central frequency is equal to 21.5 dBi and the directivity is 24.2 dBi. The peak gain is of 22 dBi at 150 GHz, and the -1 dB bandwidth is of 16% (24 GHz).

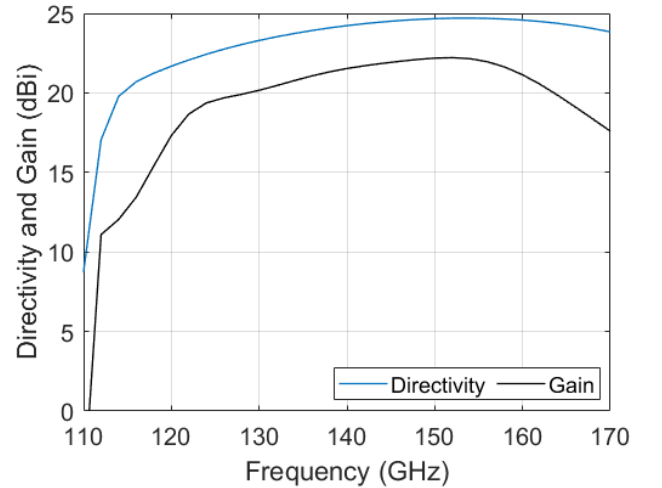


Fig. 4. Directivity and the gain (dBi) of the reconfigurable calculated at broadside using the MATLAB numerical tool.

The full TA considering the two phase distribution is then simulated in HFSS (Fig. 5) with the Finite Element Boundary Integral (FE-BI) solver. The TA is illuminated using a standard 10-dBi horn placed at a focal distance  $F = 13$  mm ( $F/D = 0.81$ ).

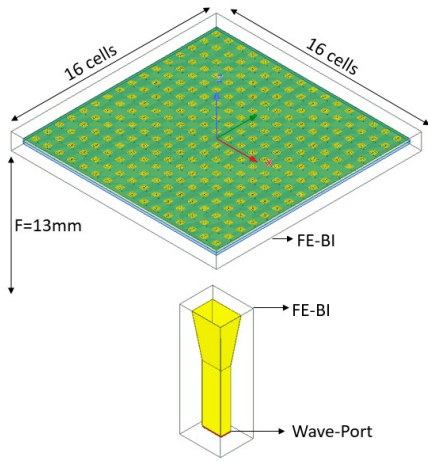


Fig. 5. The full-wave simulation of the 16×16 unit-cells transmitarray.

The simulation results are then compared to the MATLAB theoretical results. In Fig. 6, the normalized pattern for the two transmission cases ( $0^\circ$  and  $30^\circ$ ) are shown with the corresponding phase distribution. The plots shows good agreement between the full-wave simulations and the theoretical results especially in the main beam. These patterns demonstrate the feasibility of reconfigurable TA using the developed unit-cell.

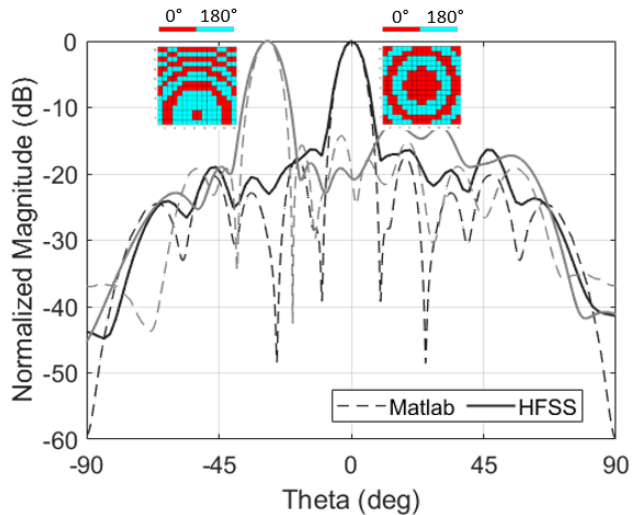


Fig. 6. The normalized patterns of the transmit-array in broadside and  $30^\circ$  transmission.

#### IV. CONCLUSION

An electronically reconfigurable unit-cell design is proposed in this paper. A 1-bit phase shift is ensured by alternating the states of two PCM based GeTe switches. The simulation of a 16×16-element transmitarray is performed and validate in full-wave simulation. The normalized patterns for  $0^\circ$  and  $30^\circ$  pointing demonstrate the feasibility of reconfigurable transmitarray using PCM switches. The results

of the study are promising for further investigation especially on the activation process of the switches. For the best of our knowledge, this is a first study on reconfigurable transmitarray with steering beam capabilities in the D-band using switches based on PCM.

#### ACKNOWLEDGMENT

This work was supported by the French Agency for National Research (ANR) via Carnot funding and through the project “Next5G” under the Grant ANR 18-CEA25-0009-01.

#### REFERENCES

- [1] J. R. Reis, M. Vala, and R. F. S. Caldeirinha, “Review paper on transmitarray antennas,” *IEEE Access*, vol. 7, pp. 94171-94188, 2019.
- [2] J. Y. Lau and S. V. Hum, “Reconfigurable transmitarray design approaches for beamforming applications,” *IEEE Trans. Antennas Propag.*, vol. 60, no. 12, pp. 5679-5689, Dec.2012.
- [3] C. Cheng, B. Lakshminarayanan, and A. Abbaspour-Tamijani, “A programmable lens-array antenna with monolithically integrated MEMS switches,” *IEEE Trans. Microw. Theory Tech.*, vol. 57, no. 8, pp. 1874-1884, Aug. 2009.
- [4] F. Diaby, A. Clemente, R. Sauleau, K. T. Pham, and L. Dussopt, “2 bit reconfigurable unit-cell and electronically steerable transmitarray at Ka-band,” *IEEE Trans. Antennas Propag.*, vol. 68, no. 6, pp. 5003-5008, June 2020.
- [5] X. Li, Z. Li, C. Wan, and S. Song, “Design and analysis of terahertz transmitarray using 1-bit liquid crystal phase shifter,” in *9th Asia-Pac. Conf. Antennas Propag. (APCAP)*, Xiamen, China, Aug.2020, pp. 1-2.
- [6] Z. Miao et al., “140 GHz high-gain LTCC-integrated transmit-array antenna using a wideband SIW aperture-coupling phase delay structure,” *IEEE Trans. Antennas Propag.*, vol. 66, no. 1, pp. 182-190, Jan. 2018.
- [7] H. Yi, S.-W. Qu, and C. H. Chan, “Low-cost two-layer terahertz transmit array,” *Electron. Lett.*, vol. 53, no. 12, pp. 789-791, Jun. 2017.
- [8] F. Foglia Manzillo, A. Clemente, and J. L. González-Jiménez, “High-gain D-band transmitarrays in standard PCB technology for beyond-5G communications,” *IEEE Trans. Antennas Propag.*, vol. 68, no. 1, pp. 587-592, Jan. 2020.
- [9] A. Léon, B. Reig, V. Puyal, E. Perret, P. Ferrari, and F. Podevin, “High performance and low energy consumption in phase change material RF switches,” in *48th Eur. Microw. Conf. (EuMC)*, Madrid, Spain, Sept.2018, pp. 491-494.
- [10] L. M. De La Cruz, S. Hawasli, T. G. Ivanov, T. K. Anthony, and M. Zaghoul, “Germanium telluride reconfigurable antennas,” in *IEEE Int. Symp. Antennas Propag. (APS/URSI)*, Puerto Rico, Jul.2016, pp. 1053-1054.
- [11] J. Leon-Valdes, L. Huitema, E. Arnaud, D. Passerieux, and A. Crunteanu, “Polarization reconfiguration of a millimeter-waves antenna using the optical control of phase change materials,” in *14th Eur. Conf. Antennas Propag. (EuCAP)*, Copenhagen, Denmark, Mar.2020, pp. 1-4.
- [12] D. E. Anagnostou, G. Goussetis, D. Torres, and N. Sepulveda, “Ultra-fast reconfigurable antennas with phase change materials,” in *Int. Workshop Antenna Technol. (iWAT)*, Athens, Greece, Mar.2017, pp. 146-147.