



**HAL**  
open science

# A parsimonious identification approach in the frequency-domain for experimental fractional systems of unknown order

Jose Antunes, Philippe Piteau, Xavier Delaune, Romain Lagrange, Domenico Panunzio

## ► To cite this version:

Jose Antunes, Philippe Piteau, Xavier Delaune, Romain Lagrange, Domenico Panunzio. A parsimonious identification approach in the frequency-domain for experimental fractional systems of unknown order. NODYCON 2023, Jun 2023, Rome, Italy. cea-04490207

**HAL Id: cea-04490207**

**<https://cea.hal.science/cea-04490207>**

Submitted on 5 Mar 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# A parsimonious identification approach in the frequency-domain for experimental fractional systems of unknown order

Jose Antunes\*, Philippe Piteau\*\*, Xavier Delaune\*\*, Romain Lagrange\*\* and Domenico Panunzio\*\*

\*Center for Nuclear Sciences and Technologies, IST, Lisbon University, 2695-066 Bobadela, Portugal

\*\*Université Paris-Saclay, CEA, Service d'Études Mécaniques et Thermiques, F-91191 Gif-sur-Yvette, France

**Abstract.** When the order of experimental fractional systems is unknown, frequency domain identification is typically based on linear least-squares ( $L_2$ ) methods, which often prove unsatisfactory. The main reason is that the solutions they provide are dense, often leading to a continuous of identified fractional differential orders, which obfuscate the very basic phenomena one wishes to highlight. In order to overcome such difficulty, the present work proposes the use of a  $L_1$  based nonlinear identification approach, which naturally leads to parsimonious identified results. This method is successfully illustrated on a system transfer function with both integer and fractional differential terms.

## Introduction

Fractional models are being increasingly used in many branches of physics and engineering [1]. In this work we deal with the identification of fractional models from experimental Frequency Response Functions (FRFs) in the frequency domain  $H(i\omega)$ , when the integro-differential equations discrete order(s)  $\alpha_n$  are unknown:

$$Z(i\omega) = \frac{1}{H(i\omega)} = \frac{F(i\omega)}{X(i\omega)} = \sum_{n=1}^N c_n (i\omega)^{\alpha_n} \quad (1)$$

The linear identification procedure proposed by Hartley & Lorenzo [2] is straightforward to implement. The differential order continuum is discretized in the interval  $[\alpha_{\min}, \alpha_{\max}]$  sampled at  $\Delta\alpha$ , so that  $m = 1, \dots, M$  differential order terms are identified. The FRFs  $Z(i\omega_k) = 1/H(i\omega_k)$  are measured at  $k = 1, \dots, K$  frequencies. Then, the model is formulated in (2) and solved by the Least Squares Deviation (LSD) method:

$$\begin{bmatrix} (i\omega_1)^{\alpha_1} & \dots & (i\omega_1)^{\alpha_M} \\ \vdots & \ddots & \vdots \\ (i\omega_K)^{\alpha_1} & \dots & (i\omega_K)^{\alpha_M} \end{bmatrix} \begin{Bmatrix} c_1 \\ \vdots \\ c_M \end{Bmatrix} = \begin{Bmatrix} Z(i\omega_1) \\ \vdots \\ Z(i\omega_K) \end{Bmatrix} \rightarrow \mathbf{M}\mathbf{c} = \mathbf{z} \rightarrow \mathbf{c}_{LSD} = \min \|\mathbf{M}\mathbf{c} - \mathbf{z}\|_{L_2} \rightarrow \mathbf{c}_{LSD} = \mathbf{M}^+ \mathbf{z} = (\mathbf{M}^T \mathbf{M})^{-1} \mathbf{M}^T \mathbf{z} \quad (2)$$

## Results and discussion


Unfortunately, solutions provided by the LSD method are dense, producing a continuous of identified fractional differential orders as  $M$  increases, which is objectionable. In order to overcome this difficulty, we propose to replace the LSD by the Least Absolute Deviation (LAD) method, a nonlinear  $L_1$ -based identification approach that is sparsity-promoting, leading to parsimonious results:

$$\mathbf{c}_{LAD} = \min \|\mathbf{M}\mathbf{c} - \mathbf{z}\|_{L_1} \quad (3)$$

We illustrate the identification results on the following test system, previously used by Hartley & Lorenzo [2]:

$$Z(\omega) = 1(i\omega)^2 + 1.4(i\omega)^{1.5} + 1(i\omega) + 1.4(i\omega)^{0.5} + 1 \quad (4)$$

with three integer and two fractional derivatives. The range of integro-differential order hypothesized for identification is  $\alpha \in [-1, 3]$ , sampled at  $\Delta\alpha = 0.1$ , these conditions being highly stringent compared to [2]. The LAD identification is based on the Iterative Reweighted Least Squares (IRLS) algorithm [3], which can minimize any  $L_p$  norm. Figure 1 clearly demonstrates, not only the essential problem of the common LSD identification method, but also the significant improvements obtained when the sparsity-promoting LAD approach is used. Robustness of the identification results is currently being addressed.

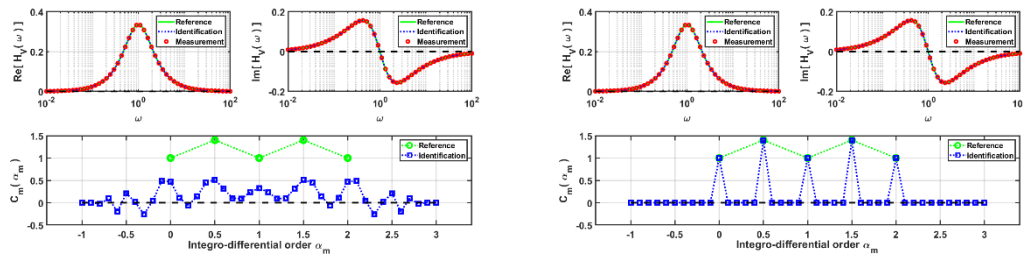

**Figure 1:** Left side - FRFs and derivative coefficients using common least-squares ( $L_2$ ) identification; Right side - FRFs and derivative coefficients using nonlinear sparse ( $L_1$ ) identification.

## References

- [1] Machado J.A. et al. (2010) Some Applications of Fractional Calculus in Engineering. *Math. Probl. Engineering* **2010/639801**:1-34.
- [2] Hartley T.T., Lorenzo C.F. (2003) Fractional-Order System Identification Based on Continuous Order Distribution. *Signal Processing* **83**:2287-2300.
- [3] Björk A. (1996) Numerical Methods for Least Squares Problems. SIAM, Philadelphia.