



**HAL**  
open science

## Study of the leakage current mechanisms in quasi-vertical GaN-on-silicon Schottky diode fabricated by localized epitaxy

Mohammed El Amrani, Julien Buckley, Thomas Kaltsounis, David Plaza Arguello, Hala El Rammouz, Daniel Alquier, Matthew Charles

### ► To cite this version:

Mohammed El Amrani, Julien Buckley, Thomas Kaltsounis, David Plaza Arguello, Hala El Rammouz, et al.. Study of the leakage current mechanisms in quasi-vertical GaN-on-silicon Schottky diode fabricated by localized epitaxy. GaN Marathon 2024, Jun 2024, Vérone, Italy. cea-04724986

**HAL Id: cea-04724986**

**<https://cea.hal.science/cea-04724986v1>**

Submitted on 7 Oct 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Study of the Leakage Current Mechanisms in Quasi-Vertical GaN-on-Silicon Schottky Diode Fabricated by Localized Epitaxy

Mohammed El amrani<sup>1,2</sup>, Julien Buckley<sup>1</sup>, Thomas Kaltsounis<sup>1</sup>, David Arguello Plaza<sup>1</sup>, Hala Rammouz<sup>1</sup>, Daniel Alquier<sup>2</sup>, Charles Matthew<sup>1</sup>

<sup>1</sup>Univ. Grenoble Alpes CEA, LETI F-38000 Grenoble, France

<sup>2</sup>Laboratoire GREMAN, Université de Tours, 16 rue Pierre et Marie Curie, 37100 Tours, France

**Abstract**— in this work, temperature-dependent current-voltage characteristics was measured to investigate leakage conduction mechanisms in GaN-on-Si quasi-vertical Schottky barrier diode grown with localized epitaxy. At low reverse bias (-0V to -10V), thermionic emission and Frenkel-Poole are dominated, at a relatively high voltage range (-10V to -40V), the increased electric field promotes the electron hopping along the threading dislocation in the bulk GaN layers, and VRH becomes the main current mechanism at whole temperature range.

## I. INTRODUCTION

Gallium Nitride (GaN) has become increasingly popular in the realm of power devices due to its remarkable properties such as wide bandgap, high electron mobility, and a strong breakdown field strength. A few research have been done on vertical GaN on Si power devices using localized growth [1], [2]. In this work we demonstrates quasi vertical GaN Schottky barrier diodes (SBDs) grown on Si Substrate using localized Epitaxy [3], as well as investigating electrical performance in forward and reverse. To understand the mechanisms responsible for leakage, temperature dependent reverse leakage characterization were performed and analyzed analytically [4].

## II. DEVICE FABRICATION

Fig. 1 shows the schematic cross-section view of the fabricated quasi-vertical GaN SBD. The structure consists of  $5\mu\text{m}$  n-GaN drift layer, three n+-GaN layers with  $350\text{ nm}$  ( $5 \times 10^{16}\text{ cm}^{-3}$ ,  $5 \times 10^{17}\text{ cm}^{-3}$  and  $5 \times 10^{18}\text{ cm}^{-3}$  from the bottom to the top) as current spreading layer, and  $300\text{ nm}$  u-GaN and finally AlGaIn/AlN buffer layer, grown on p-type 4-inch (111) Si substrate by MOVPE. The SEM image and Stylus profilometry are illustrated in Fig. 2.

## III. RESULTS AND DISCUSSIONS

Fig. 3 depict the typical capacitance-voltage measurement of the diode, the extracted net doping concentration in n-drift region is  $\sim 5 \times 10^{16}\text{ cm}^{-3}$ . Fig. 4(a) showed the forward J-V characteristics in semi-log scale for quasi vertical Schottky diode, showing a low turn on voltage  $\sim 0.6\text{ V}$  and a good ON/OFF current ratio of  $10^8$ . As shown in Fig. 4(b), the device achieve a high current density of  $2.5\text{ kA/cm}^2$  at  $5\text{ V}$  and low  $R_{on}$  of  $1.9\text{ m}\Omega\cdot\text{cm}$  at  $5\text{ V}$  despite the current crowding effect on the edges. The extracted ideality factor and Schottky barrier height where close to 1.03 and 1.1 eV respectively. Fig. 5(a) and 5(b) show the temperature-dependent forward characteristics of the SBD. As shown in the inset of Fig. 5(a), as the temperature increases, the differential  $R_{on,sp}$ , increases from to the reduced

electron mobility mainly from thermal enhanced phonon scattering. In Fig. 5(c) the ideal factors  $\eta$  increases from 1 to  $\sim 2$  with temperature indicating the impact of the surface traps on devices performances, which is well confirmed by the change in barrier with temperature. Which suggest the thermal instability of the Schottky contact in the SBD at high temperatures. The experimental Richardson's constant is  $4.59\text{ A cm}^{-2}\text{ K}^{-2}$ . This underestimation could be explained by the inhomogeneous barrier [5].

Fig. 6(a) shows reverse I-V characteristics of the GaN vertical SBD. The destructive BV of the SBD is  $\sim 80\text{ V}$  probably due to the absence of Edge termination and the higher doping in drift layer. Fig. 6(b) shows the measured temperature-dependent reverse I-V characteristics of the SBD up to  $-40\text{ V}$ . The characteristics can be divided into three different voltage regions. Fig. 6(c) depicts the current density as a function of  $1000/T$ . Three regions with different characteristics are identified, which are marked as "A", "B" and "C". Region "A", is near zero bias with high temperature dependence which indicates the TE is the main mechanism in this region, while region "B" is from  $-0.5$  to  $-10\text{ V}$  which is dominated by the Frenkel-Poole process. And region "C" from  $-10$  to  $-40\text{ V}$  that can be attributed to the variable range hopping (VRH) [4]. It is worth pointing out that these mechanisms have been well confirmed with the extracted parameters.

## IV. CONCLUSION

In conclusion, temperature-dependent reverse bias I-V characteristics in a range of  $300\text{--}433\text{ K}$  was measured and the leakage current transport mechanisms were investigated for a GaN-on-Si quasi-vertical SBD grown by localized epitaxy. At low voltage (Region A & B:  $0\text{ V}$  to  $-10\text{ V}$ ), the current density (J) follows a linear relationship with  $1/T$ . This characteristic correspond to the TE and PFE leakages process [4]. While at high voltage (Region C:  $-10\text{ V}$  to  $-40\text{ V}$ ), the leakage current becomes insensitive to the temperature which suggest the domination of VRH mechanism. Therefore, this work gives an in-depth insight for the leakage mechanisms and provides a useful guidance to improve GaN vertical power devices.

## REFERENCES

- [1] Tanaka, J. App Phys 125, n° 8 (2019). [2] A. Debal, Semicond. Sci. Technol., vol. 36, n° 3 (2021) [3] T. Kaltsounis et al., Microelectronic Engineering, vol.273, (2023). [4] K. Fu et al, in IEEE vol. 8, (2020). [5] Lucolano, F. J. Appl. Phys. 102, 2007, 113701.

## ACKNOWLEDGMENTS

This work is part of the ELEGaNT project (ANR-22-CE05-0010).

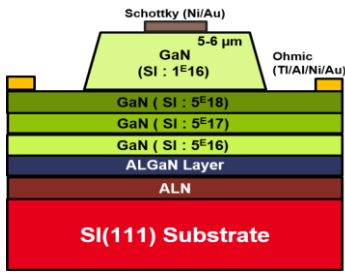


Figure 1. The schematic cross-section of quasi-vertical diode with localized growth.

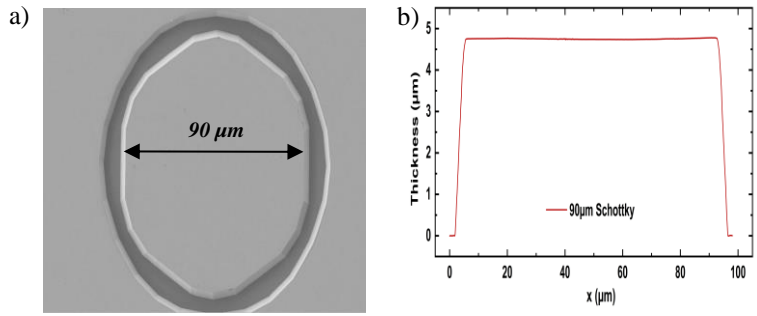


Figure 2.a) The SEM image and b) Stylus profilometry of the fabricated quasi-vertical GaN SBD.

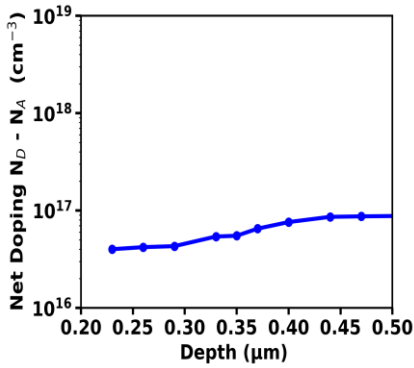


Figure 3. Extracted depth dependent net doping concentration in the n—GaN drift layer from the CV curve.

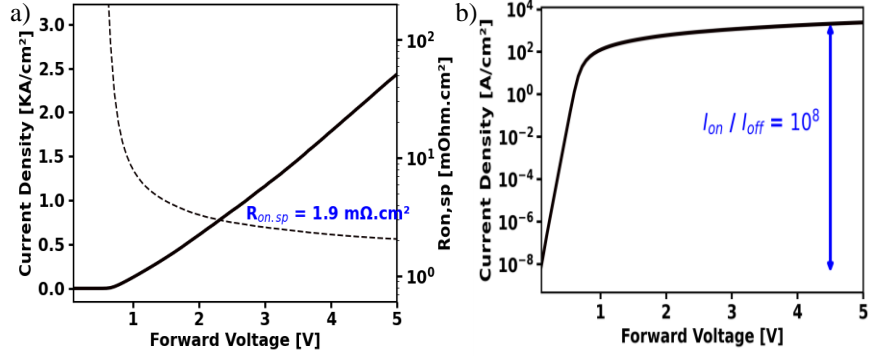


Figure 4. Forward I-V curves of SBD in a) linear scale and b) semi-log scale.

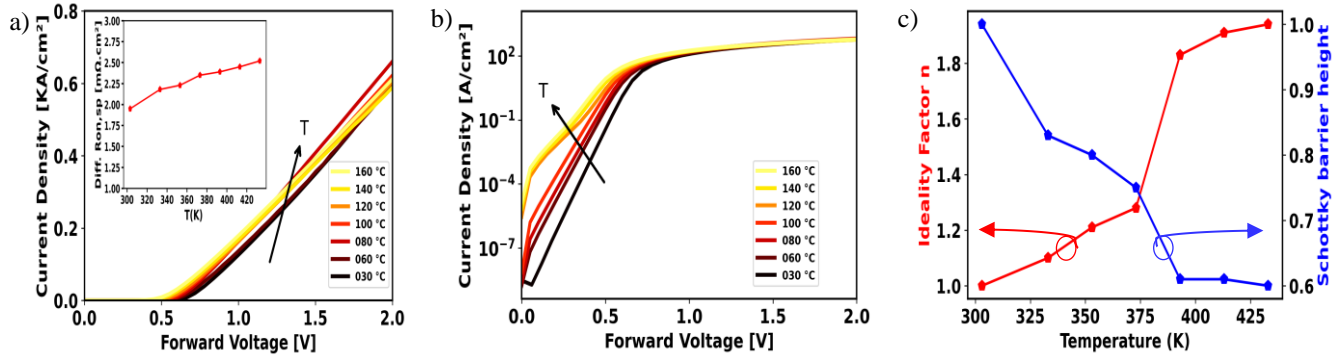


Figure 5(a) Temperature-dependent forward I-V characteristics on the linear scale. Inset: differential specific on-resistance  $R_{on,sp}$  as a function of temperature  $T$ . (b) Temperature-dependent forward I-V characteristics on a semi-log scale..(c) Extracted ideality factor  $n$  and Schottky barrier height as a function of temperature for the Metal/n-GaN Schottky contacts.

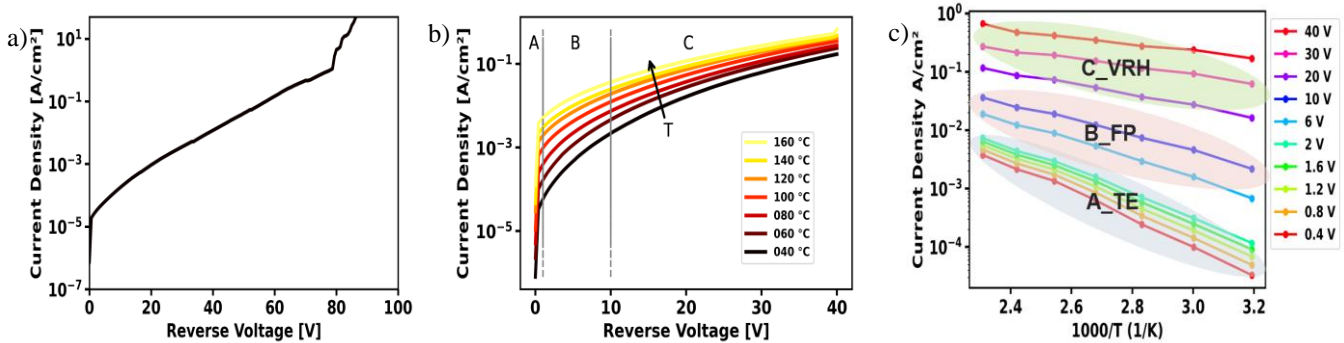


Figure 6(a) Breakdown characteristic of the fabricated quasi-vertical GaN (b) Temperature-dependent Reverse I-V characteristics on the log scale.(c). current density vs. temperature at different voltages (Region A : Thermionic Emission « TE », Region B : Frenkel-Poole « FP » and Region B : Variable Range Hopping « VRH »).