



HAL
open science

Formation of artificial solid electrolyte interphase by radiolysis

Varenne Fanny, Frederic Miserque, Adrien Boulineau, Jean-Frédéric Martin, Mickaël Dollé, Sébastien Cahen, Claire Hérold, Florent Boismain, John P. Alper, Nathalie Herlin-Boime, et al.

► **To cite this version:**

Varenne Fanny, Frederic Miserque, Adrien Boulineau, Jean-Frédéric Martin, Mickaël Dollé, et al.. Formation of artificial solid electrolyte interphase by radiolysis. 13th International Conference on Materials Chemistry, Jul 2017, Liverpool, United Kingdom. cea-02338898

HAL Id: cea-02338898

<https://cea.hal.science/cea-02338898>

Submitted on 30 Oct 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Formation of artificial solid electrolyte interphase by radiolysis

Varenne, Fanny¹, Miserque, Frédéric², Boulineau, Adrien³, Martin, Jean-Frédéric⁴, Dollé, Mickaël⁵, Cahen, Sébastien⁶, Hérold, Claire⁶, Boismain, Florent¹, Alper, John¹, Herlin-Boime, Nathalie¹ and Le Caër, Sophie¹.

¹CEA, DRF, IRAMIS, NIMBE, UMR 3685, Gif Sur Yvette, France, ²CEA, DEN, DANS, DPC, SCCME, LECA, Gif-sur-Yvette, France, ³CEA, LITEN, Grenoble, France, ⁴CEA, LITEN, DEHT, SCGE, Grenoble, France, ⁵Laboratoire Chimie et Electrochimie des Solides - Université de Montréal, Montréal, Canada, ⁶Institut Jean Lamour, UMR 7198, Université de Lorraine, Vandoeuvre-lès-Nancy, France.

Among energy storage devices, Lithium ion batteries (LIBs) are efficient power sources used for many applications including mobile microelectronics. However, ageing phenomena are not yet fully understood. These phenomena are a crucial issue to provide safe and stable batteries¹. LIBs are usually composed of a negative electrode where the active material is graphite, a positive electrode usually a lithium metal oxide and an organic liquid electrolyte. Ortiz *et al.* have shown that radiolysis is a powerful tool to simulate the degradation of the latter one in short time: minutes/hours instead of weeks/months by electrolysis (Fig. 1). Moreover, radiolysis allows performing experiments at the picosecond time scale thus giving access to reaction mechanisms^{2,3}. During the first cycles of the battery, the reduced surface of the negative electrode reacts with the electrolyte producing a solid interphase (solid electrolyte interphase, SEI)⁴ which is responsible for the capacity loss of the battery⁵. In this work, we investigated the SEI formation by radiolysis at the surface of various carbonaceous materials including crystalline graphite (lithiated or not) and carbon nanoparticles (amorphous as well as organized) prepared by laser pyrolysis⁶. Materials were dispersed in a mixture of carbonate solvents containing LiPF₆. Composition and morphology of SEI were investigated by XPS and TEM while the composition of gas and liquid phases was studied by gas chromatography and high resolution mass spectrometry, respectively. We show that an artificial SEI can be produced by radiolysis. We observe always the same degradation mechanisms of the electrolyte but interestingly the SEI composition depends on the carbonaceous material. The artificial SEI formed at the surface of graphite is composed of Li carbonate, oxalate and oligomers of poly(ethylene oxide) while the SEI formed at the surface of carbon nanoparticles contains Li salts as Li₂CO₃. Radiolysis allows producing materials with modified surface that will be tested as new materials for negative electrode.

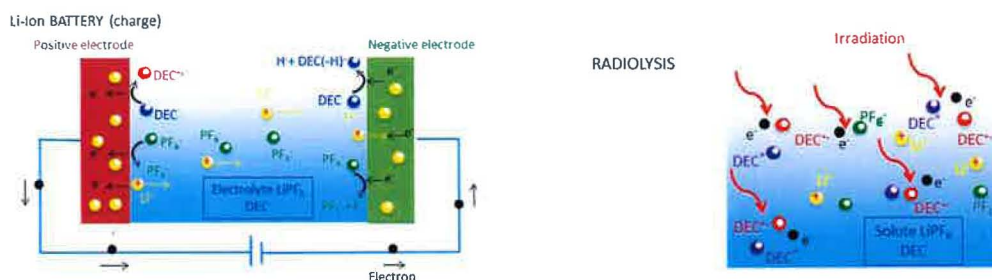


Fig. 1. Comparison between primary electron transfers at the electrodes in the electrolytic charge/ageing processes of a Li-ion battery (in LiPF₆ 1 M/diethylcarbonate solution as a model electrolyte) (left), and after ionization in the bulk during radiolysis with the same medium (right)³.

References: ¹Larcher D., Tarascon J. M. *Nature Chem.* **2015**, 7, 19-29. ²Ortiz D., Steinmetz V., Durand D., Legand S., Dauvois V., Maître P., Le Caër S. *Nat. Comm.* **2015**, 6, 6950. ³Ortiz D., Jiménez Gordon I., Baltaze J.-P., Hernandez-Alba O., Legand S., Dauvois V., Si Larbi G., Schmidhammer U., Marignier J.-L., Martin J.-F., Belloni J., Mostafavi M., Le Caër S. *ChemSusChem* **2015**, 8, 3605-3616. ⁴Yan J., Zhang J., Su Y.-C., Zhang X.-G., Xia B.-J. *Electrochim Acta* **2010**, 55, 1785-1794. ⁵Peled E. *J. Electrochem. Soc.* **1979**, 126, 2047-2051. ⁶Galvez A., Clinard C., Rouzaud J.N., Herlin-Boime N., Reynaud C. *Carbon*, **2002**, 40, 2775-2789.