



**HAL**  
open science

# Comparison of helium and hydrogen releases in 1 m<sup>3</sup> and 2 m<sup>3</sup> two vents enclosures: Concentration measurements at different flow rates and for two diameters of injection nozzle

Gilles Bernard-Michel, Deborah Houssin-Agbomson

## ► To cite this version:

Gilles Bernard-Michel, Deborah Houssin-Agbomson. Comparison of helium and hydrogen releases in 1 m<sup>3</sup> and 2 m<sup>3</sup> two vents enclosures: Concentration measurements at different flow rates and for two diameters of injection nozzle. *International Journal of Hydrogen Energy*, 2017, 42 (11), pp.7542-7550. 10.1016/j.ijhydene.2016.05.217 . cea-02387186

**HAL Id: cea-02387186**

**<https://cea.hal.science/cea-02387186>**


Submitted on 6 Jan 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Available online at [www.sciencedirect.com](http://www.sciencedirect.com)

ScienceDirect

journal homepage: [www.elsevier.com/locate/he](http://www.elsevier.com/locate/he)

# Comparison of helium and hydrogen releases in 1 m<sup>3</sup> and 2 m<sup>3</sup> two vents enclosures: Concentration measurements at different flow rates and for two diameters of injection nozzle

Gilles Bernard-Michel <sup>a,\*</sup>, Deborah Houssin-Agbomson <sup>b</sup>

<sup>a</sup> C.E.A. Saclay, DEN, DANS, STMF, LIEFT, 91191 Gif-sur-Yvette Cedex, France

<sup>b</sup> Air Liquide, Centre de Recherche Claude-Delorme, 1 chemin de la Porte des Loges, 78354, Les Loges-en-Josas, France

## ARTICLE INFO

### Article history:

Received 11 February 2016

Received in revised form  
19 May 2016

Accepted 23 May 2016

Available online 11 June 2016

### Keywords:

Safety  
Helium  
Hydrogen  
Similitude  
Fuel cells

## ABSTRACT

This work presents a parametric study on the similitude between hydrogen and helium distribution when released in the air by a source located inside of a naturally ventilated enclosure with two vents. Several configurations were experimentally addressed in order to improve knowledge on dispersion. Parameters were chosen to mimic operating conditions of hydrogen energy systems. Thus, the varying parameters of the study were mainly the source diameter, the releasing flow rate, the volume and the geometry of the enclosure. Two different experimental set-ups were used in order to vary the enclosure's height between 1 and 2 m. Experimental results obtained with helium and hydrogen were compared at equivalent flow rates, determined with existing similitude laws. It appears, for the plume release case, that helium can suitably be used for predicting hydrogen dispersion in these operating designs. On the other hand – when the flow turns into a jet – non negligible differences between hydrogen and helium dispersion appear. In this case, helium – used as a direct substitute to hydrogen – will over predict concentrations we would get with hydrogen. Therefore, helium concentration read-outs should be converted to obtain correct predictions for hydrogen. However such a converting law is not available yet.

© 2016 Hydrogen Energy Publications LLC. Published by Elsevier Ltd. All rights reserved.

## Context

Experimental and numerical studies on the dispersion of buoyant jets in confined but naturally ventilated environments are carried out in order to understand better the implied phenomena and to improve predictive methods for risk assessment of hydrogen release within confined volumes. Recently experiments on dispersion were performed by several authors [1,6,9–11] in large scale enclosures equipped

with two ventilation openings. The work reported here aims at studying the natural ventilation through two openings in two enclosures of 1 m<sup>3</sup> and 2 m<sup>3</sup>, with specific geometries close to existing hydrogen energy applications in case of accidental release. Experiments are performed with helium and hydrogen as releasing sources. We compare measurements between hydrogen and helium release from each enclosure and also for the two following diameters of injection pipe: 4 mm and 27.2 mm.

\* Corresponding author.

E-mail addresses: [gilles.bernard-michel@cea.fr](mailto:gilles.bernard-michel@cea.fr) (G. Bernard-Michel), [deborah.houssin@airliquide.com](mailto:deborah.houssin@airliquide.com) (D. Houssin-Agbomson).  
<http://dx.doi.org/10.1016/j.ijhydene.2016.05.217>

0360-3199/© 2016 Hydrogen Energy Publications LLC. Published by Elsevier Ltd. All rights reserved.

The first section of this paper presents briefly engineering simple approaches commonly used for maximal concentration assessment at the steady state. We deduce from those models the similitude law which gives the relationship between hydrogen and helium's flow rates at which helium and hydrogen are expected to produce the same concentration distribution. In the second section, the experimental set-ups are described. Finally in the last part, the results are presented and discussed before concluding.

## Existing modelling approach

Only the steady state will be considered in the following work. The enclosure is naturally ventilated thanks to two vertical vents located for the first one near the floor and for the second one, near the ceiling as shown in Fig. 1. Baines and Turner model [2] was extended by Linden [3,4] to consider an enclosure connected by upper and lower vents to external environment. Linden showed that a simple stratification develops consisting in two layers separated by an horizontal interface. The lower layer is set at a uniform ambient temperature as well as the upper layer but with a higher temperature that depends on the buoyancy flux from the source.

In a box that can be naturally ventilated as shown in the figure above (see Fig. 1), the presence of the upper buoyant layer creates a pressure difference across each vent, provoking consequently a draining flow. A steady state is reached when this draining flow is balanced by the convective plume flow. A buoyant gas release in an enclosure composed with two vents leads to a displacement ventilation regime resulting in the formation of an upper homogeneous layer of air and released gas above a lower layer of pure air. Linden suggests a methodology which allows to calculate, at steady-state, the concentration of the homogeneous upper layer and the height of the interface  $h$ .

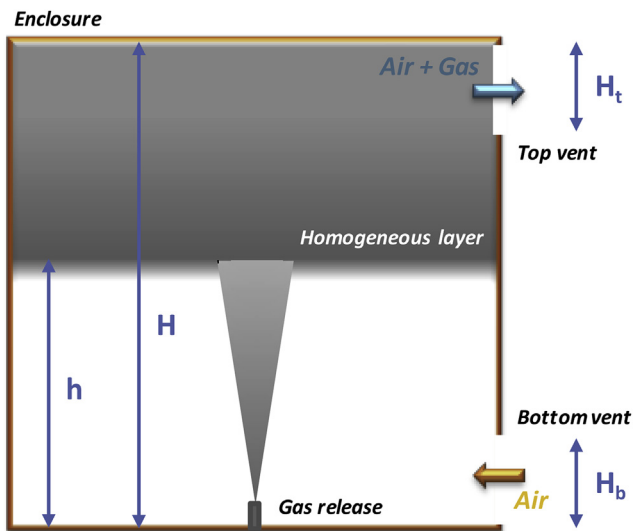


Fig. 1 – Scheme of the dispersion phenomenon considered in a naturally ventilated enclosure with two openings located at different altitudes.

$$X_f = \frac{1}{C} \left( \frac{Q_o^{21} h^{-5}}{g_o'} \right)^{1/3}, \quad (1)$$

where  $X_f$  – volume fraction of releasing gas, %,  $Q_o$  – releasing gas flow rate,  $\text{m}^3 \cdot \text{s}^{-1}$ ,  $h$  – height of the interface, m,  $g_o'$  – reduced gravity,  $\text{m} \cdot \text{s}^{-2}$  and  $g_o'$  is the reduced gravity given eq. (6).

$$C = \frac{6}{5} \alpha \left( \frac{9}{10} \alpha \right)^{1/3} \pi^{2/3}, \quad (2)$$

where  $C$  – constant given by the plume theory of Morton et al. [5],  $\alpha$  – entrainment coefficient (from 0.05 to 0.1 for a pure plume). The height of the interface,  $h$ , is given by the following expression:

$$\frac{S^*}{H^2} = C^{3/2} \left( \frac{h^5/H^5}{1-h/H} \right)^{1/2}, \quad (3)$$

$$S^* = \frac{C_t S_t S_b}{\left( \frac{1}{2} \left( \frac{C_b^2 S_b^2}{C_t^2 S_t^2} + S_b^2 \right) \right)^{1/2}}, \quad (4)$$

where  $S^*$  – effective vent area,  $\text{m}^2$ ,  $H$  – the height of the enclosure, m,  $C_t$  – top vent discharge coefficient,  $C_b$  – bottom vent discharge coefficient,  $S_t$  – top opening area,  $\text{m}^2$ ,  $S_b$  – bottom opening area,  $\text{m}^2$ .

This approach, commonly used as an engineering tool for build-up assessment, does not allow to take into account a height of release located above the ground. It means that the release of gas is considered at the floor.

## Experimental setup

### Test bench description

#### The 2 m<sup>3</sup> enclosure – Grand GAMELAN

The Plexiglas enclosure is a cuboid with a square horizontal base of an internal volume of 2 m<sup>3</sup> (see Fig. 2) (A). Internal size of the enclosure is 960 mm long and wide, for 2100 mm high. The enclosure has two openings for natural ventilation study: one at the top, and one at the bottom, located on the same vertical face as shown in Fig. 1. The bottom and top openings have a size of  $h190 \times w980$  mm.

The gas injection source is a PVC circular tube of 27.2 mm of internal diameter, centered in the horizontal square section, directed upward. A second injection source is a steel circular tube of 4 mm of internal diameter. Both injection sources, used one after another, are located at 270 mm from the bottom of the enclosure. The range of tested flow rates goes from 5  $\text{NL} \cdot \text{min}^{-1}$  up to 210  $\text{NL} \cdot \text{min}^{-1}$  for helium and from 5.2  $\text{NL} \cdot \text{min}^{-1}$  up to 218  $\text{NL} \cdot \text{min}^{-1}$  for hydrogen, based on the use of the similitude law described below (see Eqs. (5) and (6)).

$$Q_{H_2} = \left( \frac{g_{0,H_2}}{g_{0,He}} \right)^{1/2} \times Q_{He} \quad (5)$$

$$g_{0,gas} = g \frac{\rho_{air} - \rho_{gas}}{\rho_{air}} \quad (6)$$

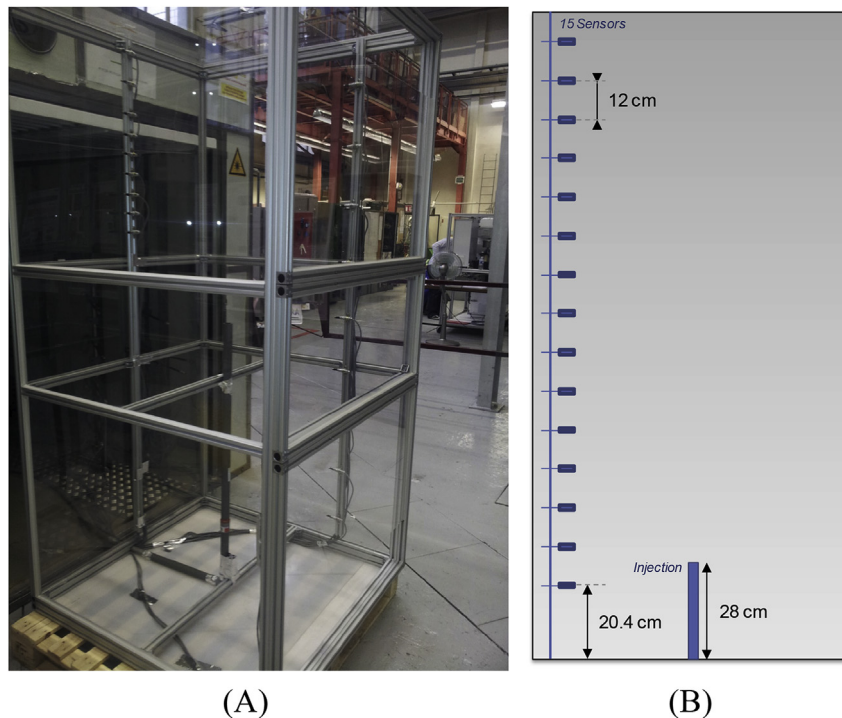


Fig. 2 – Grand-Gamelan 2-m<sup>3</sup> build-up enclosure. (A) Picture of the enclosure, (B) location of the sensors in the enclosure.

where  $Q$  – releasing gas flow rate,  $\text{NL}\cdot\text{min}^{-1}$ ,  $g'_0$  – releasing gas reduced gravity,  $\text{m}\cdot\text{s}^{-2}$ ,  $\rho$  – releasing gas density,  $\text{kg}\cdot\text{m}^{-3}$ . This similitude law comes directly from equation (1), assuming that the interface height and volume fraction of  $\text{H}_2$  and  $\text{H}_e$  would be equal. Indeed, considering equality of concentrations and heights of the interface for both two gases, we write the equality of concentration using equation (1) for each gas, which leads to equation (5). We therefore assume a total similitude of behavior between the two gases since both the concentration levels and the size of the layer would be identical. As we will show further, this similitude won't be possible for high injection flow rates, and the hypothesis to obtain a similitude of behavior should be modified. Indeed a simple modification of the flow rate is not enough to match the behavior of the two gases (for a jet release).

The injections were performed with two mass flow controllers chosen according to the desired flow rate. One controller has a  $20\text{ NL}\cdot\text{min}^{-1}$  full scale and the other has a  $600\text{ NL}\cdot\text{min}^{-1}$  full scale. The error on the mass flow rate for the  $20\text{ NL}\cdot\text{min}^{-1}$  controller is less than 0.5% between  $2\text{ NL}\cdot\text{min}^{-1}$  and the full scale. For the  $600\text{ NL}\cdot\text{min}^{-1}$  controller, the error on the mass flow rate is 0.2% of full scale plus 0.7% of the set point. Both flow meters were calibrated recently.

#### The 1 m<sup>3</sup> enclosure

The polycarbonate enclosure is a cuboid shape with a volume capacity of  $1\text{ m}^3$  (Fig. 3), with a square base of 0.995 m and a height of 1 m. The 1-m<sup>3</sup> enclosure has two openings: one at the top, and one at the bottom, located on two opposite vertical face. The bottom and top openings have a size of  $h180 \times w960\text{ mm}$ .

As for the experiments realized within the 2-m<sup>3</sup> Grand-Gamelan enclosure, the gas injection source is a circular

nozzle, alternatively of 27.2 mm and 4 mm of internal diameter. The release point is centred in the horizontal section of the enclosure and located at an altitude of 80 mm.

#### Measurement devices and data treatment

Based on the measurement of the thermal conductivity of ambient gas, 15 minicatharometers Xen-TCG3880 from Xenor Integration are used to determine the volume fraction of the helium in the enclosure. Minicatharometers were calibrated before the start of the campaign. The absolute accuracy of the minicatharometers was assessed to be around 0.1%<sub>vol</sub> of helium. The sensors can measure helium and hydrogen fraction fluctuations down to 0.05%. The reactivity of those sensors is assessed to be around 1 s.

The data treatment was automated: calculation of the time range for a steady state, time averaging of the concentrations and standard deviation, as illustrated in Fig. 4. A first transient state from the injection's start until the steady state is eliminated. The transient state from the end of the steady state (after the injection is stopped) until the time were the cuboid is filled with air is also eliminated. The red rectangular curve in Fig. 4 just shows the boundaries of the data considered at steady state. The calculated mean value is shown by the green line.

Pt-100 $\Omega$  Platinum probes are integrated inside each sensor for temperature measurement inside the enclosure during experimentation. The calibration of the platinum probes temperature gives an absolute accuracy of 0.5 °C on temperature data. They can measure temperature fluctuations down to 0.1 °C.

#### Sensors location inside the 2 m<sup>3</sup> enclosure

Fifteen sensors are located on one vertical pole. From 204 mm from the floor of the enclosure, the fifteen sensors are

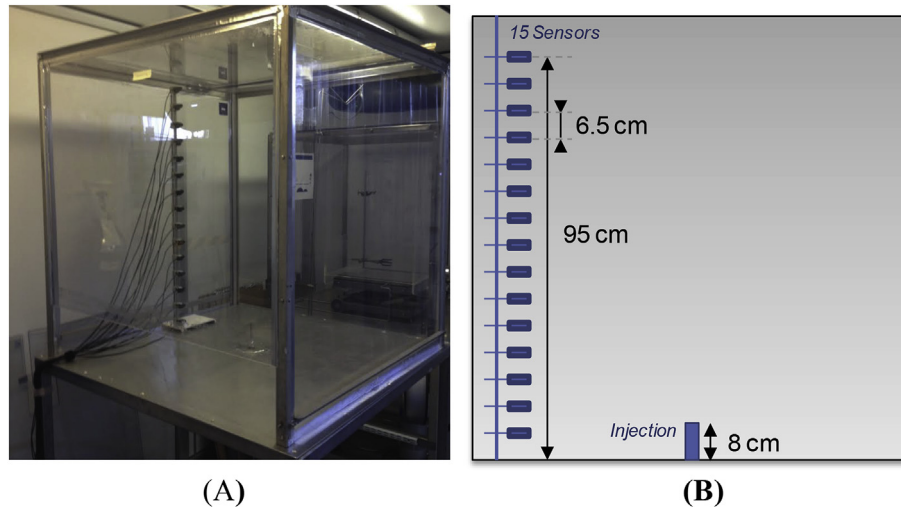


Fig. 3 – 1-m<sup>3</sup> build-up enclosure. (A) Picture of the enclosure, (B) location of the sensors in the enclosure.

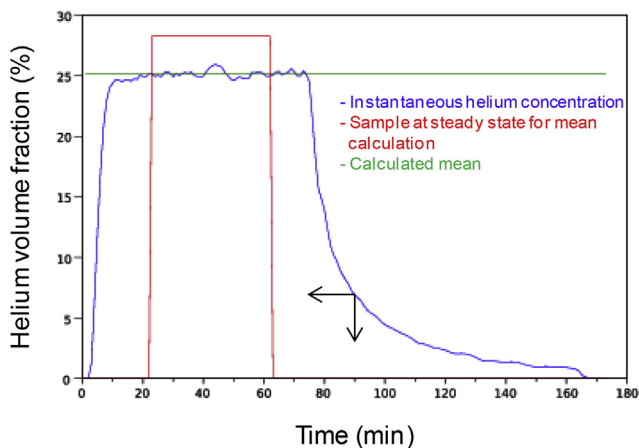


Fig. 4 – Data treatment for steady state determination based on time-measured helium volume fraction.

installed each 120 mm alongside the mast (see Fig. 2(B)), with a single exception: no sensor was placed at height 324 mm. The sensors are located on a single mast since it has been established in the Linden model that the concentration distribution is only dependent on the height and therefore one dimensional, except in the jet. This distribution has also been verified experimentally by Linden [3,4] and Bernard-Michel [8].

#### Sensors location inside the 1 m<sup>3</sup> enclosure

In the same way as with the 2 m<sup>3</sup> enclosure experiments, fifteen sensors are also placed alongside a single pole, at intervals of 65 mm; the highest sensor being located at 950 mm from the bottom of the enclosure (see Fig. 3(B)).

#### Experimental procedure and studied configurations

##### The test facility

The experiments with helium and hydrogen have been carried out at INERIS, center of Verneuil-en-Halatte. The facility is a gallery of approximately 3 m high, 3 m wide and 50 m long. The top of the gallery is located 5 m under the ground. Using a

smoke generator, we have established that the wind velocity in the facility is far lower than 100 cm/s (probably around 1 cm/s). Two plastic covers have been also placed near the enclosure to reduce any wind influence.

Safety rules allow us to carry out experiments where a maximum concentration of hydrogen is around 10%<sub>vol</sub>.

Temperature in the gallery is very steady. A maximum drift of 2 K is observed during a day. This drift is a very slow process compared to outside temperature variations. During the longest experiments (1 h), the temperature variation is not measurable therefore negligible.

On the contrary, humidity in the gallery is quite high. According to Xensor's specifications for the sensor, the influence on the measurements is expected to be less than 1% of relative error.

#### Reproducibility of the experiments

First, CEA has used the facility Grand Gamelan in its experimental warehouse. Tests were performed with helium. The experimental results were then compared with those obtained with the very same experimental set-up at INERIS. These Grand-Gamelan results were also compared with previous experiments performed on the same Grand Gamelan facility at the CEA with CEA's own Xensor sensors [8]. The results were reproducible with discrepancies lower than 0.2%<sub>vol</sub> for the concentrations of gas. This value corresponds to the absolute error of CEA calibration of the Xensor sensors. Therefore the reproducibility tests were conclusive. More details are given in the results section.

Air Liquide performed the same kind of reproducibility tests, indeed experiments have been performed in its facility with the 1 cubic meter box and the same sensors used at INERIS. The results after comparison were found to range within the sensors calibration's accuracy. Those tests validate the fact that INERIS surroundings have no significant influence on the measurements.

Lastly, some chosen experiments were repeated up to five times on different configurations (change of diameter, enclosure or of flow meter), in order to assess the quality of the reproducibility. This part will be discussed in the results section.



### Injection

The influence of flow meters on the measurements was also checked. 4 flow meters of 20, 100, 600 and 700 NL.min<sup>-1</sup> have been used and all of them were recalibrated with an accuracy greater than 1% one month before the experimentation. Only the 100 NL.min<sup>-1</sup> failed our reproducibility test, due to a problem of condensation of the humid compressed air at an early stage, during the experimental set-up preparation. This flow meter has been put aside and only the functional flow meters were used.

Then some helium or hydrogen is injected vertically upwards through a circular nozzle of 27.2 mm or 4 mm internal diameter centred in the horizontal section of the enclosure. The releasing flow rate is injected in the enclosure only when the targeted value is reached and correctly regulated by the mass controller. In order to achieve this, a solenoid valve is employed and redirects the flow outside of the enclosure at the initial time of the injection process. When the correct flow is attained (a delay is due to the head loss in the long pipes from outside of the gallery), the solenoid valve is switched on to inject the flow in the enclosure. The pipe length from the solenoid valve to the enclosure is less than 2 m long.

### Flow rates

The flow rates used in the different performed experiments are summed up in Table 1. It can be noticed that for some few configurations at INERIS, tests have not been performed with helium whereas they have been performed with hydrogen. This fact is due to a lack of time and thus it has been decided to use instead the experimental results for helium tests performed at Air Liquide with the same 1 m<sup>3</sup> enclosure. It is important to recall that reproducibility tests had been performed within , Air Liquide and CEA installations. Whenever measurements with helium have not been performed at INERIS, equivalent flow rates measured at Air Liquide are used. When similar data are obtained both at INERIS, at Air Liquide or at CEA, they are used to check the reproducibility of the results.

**Table 1 – Flow rates used for the different experiments performed.**

Parameters	Flow Values at INERIS NLmin <sup>-1</sup>	Flow value at AL NLmin <sup>-1</sup>	Flow value at CEA NLmin <sup>-1</sup>
4 mm diameter, 2 m <sup>3</sup> , H <sub>2</sub>	5,2 21 73 218	None	None
4 mm diameter, 2 m <sup>3</sup> , He	5 20 70 210	None	None
27 mm diameter, 2 m <sup>3</sup> , H <sub>2</sub>	5,2 21 73 218	None	None
27 mm diameter, 2 m <sup>3</sup> , He	5 20 70 210	None	5 20 70 210
4 mm diameter, 1 m <sup>3</sup> , H <sub>2</sub>	10 21 62 104 218	None	None
4 mm diameter, 1 m <sup>3</sup> , He	None	10 20 60 100	None
27 mm diameter, 1 m <sup>3</sup> , H <sub>2</sub>	10 21 62 104 218	None	None
27 mm diameter, 1 m <sup>3</sup> , He	10 100	None	None

The studied releasing flow rates range from 5 NL.min<sup>-1</sup> up to 210 NL.min<sup>-1</sup> for helium and from 5.2 NL.min<sup>-1</sup> up to 218 NL.min<sup>-1</sup> for hydrogen. Those values correspond to a volume Richardson number range from 800 down to  $1.1 \cdot 10^{-4}$ , see Fig. 5, where the volume Richardson number is  $g'_{0, \text{gas}} H / U_0^2$ ,  $H$  being the height of the cavity and  $U_0$  the injection velocity. Therefore situations from a plume release up to a jet release are covered. Indeed, for a Richardson number below 0.1, the flow is almost a pure jet in the cavity. When the Richardson number ranges between 0.1 and 10, a transition between a jet and a plume occurs within the cavity. For a Richardson number above 10, the flow almost behaves like a pure plume in the cavity.

### Measurements

Gas concentrations measured by the minicatharometers are recorded each second. The injection is stopped after at least 5 times the time needed to reach the steady state; that is when helium concentrations are stable in the time. Approximately 10 min of steady state regime were recorded, which is up to 10 times the length of the transient regime. During the gas injection, the stability of pressure and of temperature inside the enclosure is checked.

### Studied configurations


The summary of the studied configurations is given in Table 2 (see below).

## Results and discussion

Here the focus will be essentially on the results as a confirmation of the potential use of helium as a substitute for hydrogen in dispersion related experiments. The phenomenology of dispersion in a two vents cavity will be the object of future complementary works.

### Reproducibility of the results

The focus will be put upon the reproducibility tests because the experiments were performed in an “outdoor”

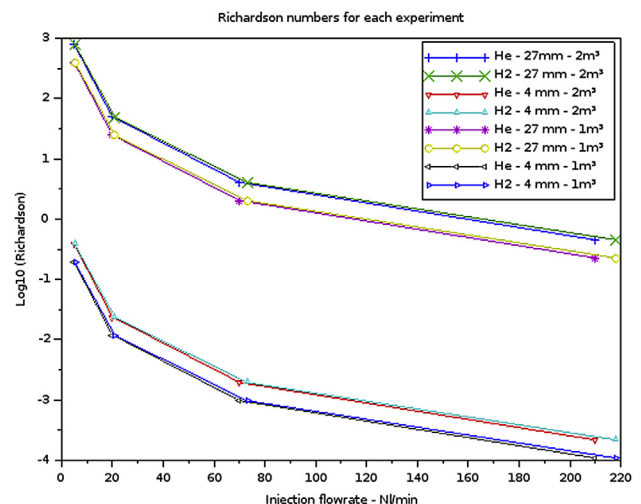

**Fig. 5 – Richardson numbers.**

**Table 2 – Studied configurations.**

Parameters	Values
Temperature	Ambient temperature, around 13 °C
Gas flow rate	From 5 to 218 NL.min <sup>-1</sup>
Injection height	270 mm
Gas	Helium   Hydrogen
Internal diameter of the source	4 27.2 mm
Bottom opening	h190 × w980 mm <sup>a</sup> h180 × w960 mm <sup>b</sup>
Top opening	h190 × w980 mm <sup>a</sup> h180 × w960 mm <sup>b</sup>

<sup>a</sup> h the height, w the width, Grand GAMELAN 2 m<sup>3</sup>.  
<sup>b</sup> h the height, w the width, Air Liquide 1 m<sup>3</sup>.

environment. Working conditions during the first days were difficult due to rainy days resulting in an atmosphere charged with high humidity and even a flooding of the floor. Therefore, it was of prime importance to ensure that electronic devices were normally functioning and that physical phenomena were not altered by these climatic changes.

#### Comparisons for 2-m<sup>3</sup> enclosure at CEA and INERIS

For helium injections, we compare the maximum volume concentration of helium measured at CEA and at INERIS for the same enclosure with the same sensors. Only the flow meters are different whereas the sensors are provided by Air Liquide. We also achieve comparisons with the same experiments carried out one year earlier at CEA with CEA's own catharometers, see Fig. 6 and Table 3.


It is possible to note that the deviation from the mean measurement is lower than an absolute 0.2%. We also point out that the vertical mast's location is different in the former CEA experiments (performed with CEA sensors). The mast is located on the side wall at the right of the vent. Therefore the error of reproducibility takes into account various flow meters, various geographical locations (CEA indoor and INERIS gallery) as well as various sensors (CEA and Air Liquide) and sensors location in the box. The observed accuracy is nevertheless within the expected range of calibration error of the sensors combined with the expected error of the flow meters. The standard deviation for the relative error of reproducibility is less than 5%.

Comparisons for 1 m<sup>3</sup> enclosure at Air Liquide and INERIS have been made on a closed box. Therefore they won't be mentioned here in this article but they will be presented in a further article. We only indicate that they are in line with the observations made with the 2-m<sup>3</sup> box and two vents.

#### General reproducibility tests at INERIS

We also perform reproducibility tests for a large number of the experiments carried out at INERIS. The initial reproducibility tests were done on the closed 1-m<sup>3</sup> enclosure. For different flow rates, 5 series of experiments are carried out and their results compared. The average reproducibility is better than 0.2% for the concentration measurements.

Consequently, for the two vents configurations, the reproducibility tests were done in an extensive way only for each major change of configuration: change of enclosure,

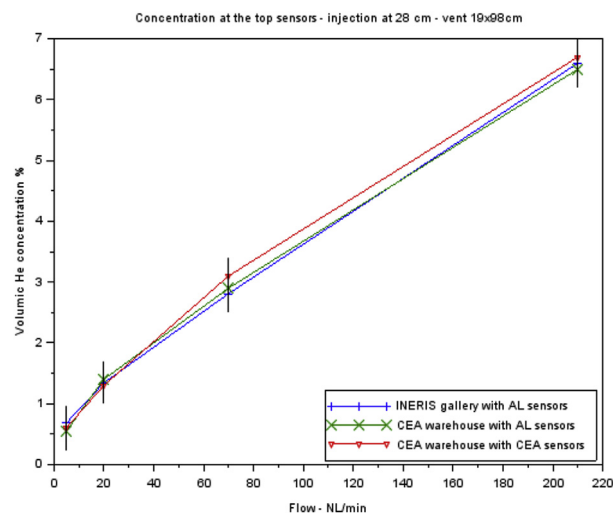

**Fig. 6 – Maximum concentration of helium at the top of the enclosure for different flow rates and for 3 tests campaigns. Exp. I is located at INERIS, Exp. II at CEA and Exp. III at CEA but with CEA's own sensors.**

**Table 3 – Concentration values – reproducibility tests.**

Diameter mm	Flow rate NL/min	Exp. I	Exp. II	Exp. III
		C <sub>max</sub> % <sub>vol</sub>	C <sub>max</sub> % <sub>vol</sub>	C <sub>max</sub> % <sub>vol</sub>
27	210	6.6	6.5	6.7
27	70	2.81	2.9	3.1
27	20	1.34	1.4	1.3
27	5	0.68	0.55	0.6


change of gas, change of injection diameter. As for the flow rates changes, only one reproducibility test is done per flow rate. The standard deviation for those tests was lower than 0.05% which is the sensitivity limit of the sensors. The maximum discrepancy observed was of 0.15%.

#### Hydrogen versus helium comparisons on 2-m<sup>3</sup> enclosure

As in Fig. 7 and Table 4, the maximum measured concentration at the top of the enclosure, for each injection diameter and each gas are given. The flow rate is varied from 5 NL.min<sup>-1</sup> up to 210 NL.min<sup>-1</sup> for the experiment conducted with helium.

It can be noted that the flow rates are indicated in the table only for helium. The corrections according to similitude law [5] are applied for hydrogen, the corresponding flow being 5.2, 20.8, 73 and 218.1 NL.min<sup>-1</sup>.

We observe that hydrogen concentrations are slightly higher than the helium ones for the lower flow rates (below 100 NL.min<sup>-1</sup>). The difference never exceeds 0.5% in absolute which is just slightly above the expected reproducibility error. In this flow range, it is also possible to notice that the results depend on the nature of the injected gas whereas they are more or less not impacted by the injection's diameter. In fact, the differences of concentrations represent, at the most, less than 0.1% when changing the diameter for a fixed flow rate.

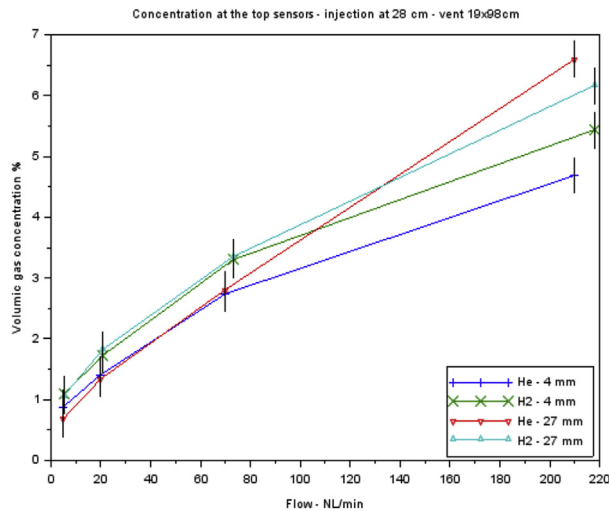


**Fig. 7 – Helium and hydrogen release – Maximum volume concentrations at different flow rates and for 4 mm and 27 mm injection diameters.**

**Table 4 – H<sub>2</sub> and H<sub>e</sub> maximum concentrations for the 2 m<sup>3</sup> enclosure.**

Diam mm	Flow rate h <sub>e</sub> NL/min	C <sub>max</sub> h <sub>e</sub> % <sub>vol</sub>	C <sub>max</sub> h <sub>2</sub> % <sub>vol</sub>
27	5	0.68	1.06
4	5	0.88	1.09
27	20	1.34	1.83
4	20	1.41	1.73
27	70	2.81	3.35
4	70	2.74	3.3
27	210	6.6	6.17
4	210	4.69	5.44

For the highest flow rate, 210 NL.min<sup>-1</sup> helium-equivalent, there are stronger differences. Hydrogen and helium concentrations are dropping when the diameter decreases from 27 mm to 4 mm. The spread between the concentrations for each gas and each diameter is twice as large for helium than for hydrogen, leading to a higher concentration of helium than hydrogen for the 27 mm injection diameter.

In Fig. 8, we plot on the graph the vertical profiles of the concentration for a 27 mm injection, at 70 NL.min<sup>-1</sup> and at 210 NL.min<sup>-1</sup>. Vertical profiles are also given at 210 NL.min<sup>-1</sup> for a 4 mm diameter injection. We can observe the 2 layers structure described by Linden [3,4]. For the 27 mm injection, the position of the interface is almost the same for hydrogen and helium at any flow rate. Nevertheless a slight shift of 100 mm is to be noticed between helium and hydrogen, the thickness of the top layer being higher for the hydrogen than for the helium. On the other end, the interface position is moving along with a change of injection's diameter from 27 down to 4 mm. In the case of the injection of gas through the 4 mm diameter, the upper zone is almost twice as thick as with the 27 mm injection. It appears that inertial effects play an important role for small diameters (injection velocity is approximately 50 times higher for the 4 mm diameter injection).

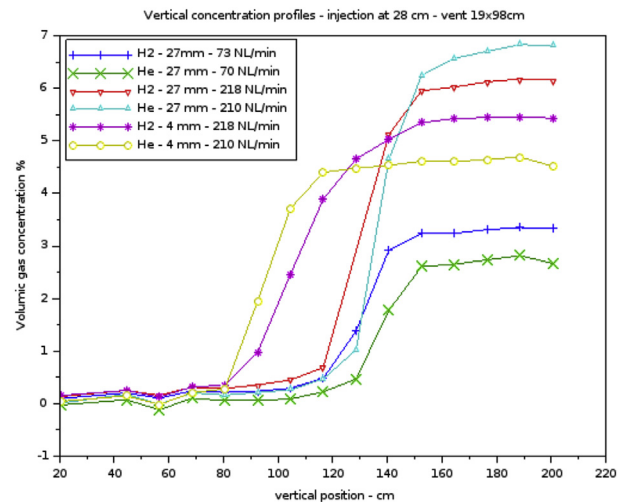

**Fig. 8 – Vertical concentration profiles at different flow rates and injection diameter for helium and hydrogen.**

The differences of density between helium and hydrogen lead to different formations of the top layer at high injection velocities (around 300 m/s at 210 NL.min<sup>-1</sup>) while the buoyancy effects stay more or less the same.

When inertial effects are important, it would be useful to develop an improved similitude law when using helium as a direct substitute for hydrogen. Indeed, the similitude law equation (5) based on equation (1) is not directly applicable since the interface's height is different for helium and hydrogen when inertial effects are important. It should be kept in mind that equation (5) was deduced from this hypothesis among others.

Let us suppose the equation (5) is satisfied and express equation (1) for hydrogen and for helium. Dividing the concentrations of hydrogen and helium  $X_f(H_2)$  and  $X_f(H_e)$  and eliminating equation (5) in this expression leads to  $X_f(H_2)h(H_2)^{5/3} = X_f(H_e)h(H_e)^{5/3}$ .

Therefore, when we use the similitude equation (5), we observe that the quantity  $X_f h^{5/3}$  should be conserved. To sum up this result, whenever Linden model—ie equation (1)—is valid, if we chose flow rates satisfying the similitude law given by equation (5), we can only be sure to conserve the quantity  $X_f h^{5/3}$ .

One of the major consequences is that if the structure of the top layer — i.e. the interface's height — is different for the two gases, the concentration will then also be different for the two gases. It also proves that any similitude law based only on the flow rates cannot succeed whenever the layer structure will be different for the two gases.

As an illustration we are doing the simple following calculation: for a helium flow rate of 210 NL.min<sup>-1</sup> a hydrogen flow rate of 218 NL.min<sup>-1</sup> and the 4 mm injection diameter, the ratio of measured helium and hydrogen concentrations should induce a ratio of interface height of 1.09. This ratio seems to be in good agreement with the curves on Fig. 8. Nevertheless, if we could design a model connecting the height of the top layer to the diameter of injection, we could then build a similitude law based both on the flow rates (equation (5)) and the diameters of injection. This supposition requires further investigations.



Injection (mm)	flow rate NL/min	$C_{\max} \text{ He}$ %vol	$C_{\max} \text{ H}_2$ %vol
27	10	1.79	1.80
4	10	1.97	2.04
27	20	-	2.52
4	20	2.76	3.0
27	60	-	5.03
4	60	4.35	4.99
27	100	8.23	6.69
4	100	4.84	6.15
27	210	-	11.12
4	210	-	7.38

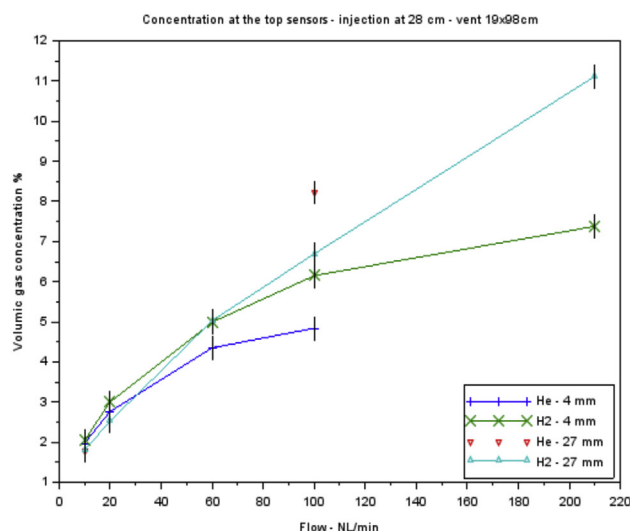


Fig. 9 – Maximum concentrations for helium and hydrogen injection in the 1-m<sup>3</sup> enclosure.

At last, in the absence of such an improved similitude law, helium still remains a good substitute to hydrogen for conservative prediction of hydrogen concentrations. Indeed, we showed that is the case for plumes injections. Concerning the inertial jet injections, we observe that concentrations of helium rapidly rise at higher levels than for hydrogen, with increasing flow rates. In the worst case, helium and hydrogen concentrations show the same evolution with the increasing flow rates, at 4 mm. Helium can then perfectly be used as a conservative substitute.

#### Hydrogen versus helium comparisons on 1 m<sup>3</sup> enclosure

We proceed with the same comparisons summarized in Fig. 9.

Below 60 NL.min<sup>-1</sup>, we observe that the differences between hydrogen and helium - for each flow rate - are standing within the range of sensor's calibration accuracy. Starting from 60 NL.min<sup>-1</sup> up to 210 NL.min<sup>-1</sup>, it is possible to observe the same phenomenon than with the 2-m<sup>3</sup> enclosure: a strong spread of the results depending on the injection's diameter. The spread is twice stronger for helium than for hydrogen. The missing data - left side table on Fig. 8 - for helium in the case of the 27 mm injection will be completed in a further article.

## Conclusions

With existing similitude law applied to injection's flow rates based on Linden model, it appears that helium cannot be directly used as a substitute for hydrogen to predict the distribution of the gas concentration. They would not be representative of what we could have obtained with hydrogen at the same flow rates. So helium as a replacement for hydrogen has mainly an interest to validate models.

Nevertheless, for a plume release, helium gives a good prediction which only worsens when the flow turns into a jet at the nozzle's exit. A first explanation of the relative inadequacy of the similitude law relative failure in this case lies in the change of structure of the layers - such as the thickness of the interface - with inertial flows. Therefore further analysis needs to be done. At the moment, we can only say that quantity  $X_f h^{5/3}$  should be conserved applying the similitude law.

We may hope to find a direct similitude between hydrogen and helium based on both flow rates (Eq. (5)) and injection diameters. In that case, a modification of both flow rate and injection diameter could lead to the same concentration read-outs for hydrogen. Such a similitude would be more likely to be accurate since the injection's diameter and the flow rate allow to control both the Reynold's and the Richardson's numbers, which we expect to determine the concentration distribution.

At last, helium can be used as a good substitute for hydrogen to build up models and determine physical constants of those models. Linden [3,4] and Carazzo [7] have indeed successfully built models with other components than hydrogen (salted water, volcano's burst), models that proved to be predictive for helium, and also for hydrogen (for example for plume release). Using various gas or liquids to validate those models helps to find out what are the effective non dimensional parameters driving the dispersion process.

## Acknowledgments

The results presented in this article have been obtained within the frame of the Horizon Hydrogène Energie (H2E) program. The authors acknowledge the French agency for innovation

support BPI, the Air Liquide Group and the CEA for their financial support of this research, and also INERIS for the technical and experimental means. Measurements made at CEA with CEA sensors were carried out with the support of the European Community. We appreciate the support of the European Research Infrastructure H2FC European Infrastructure (funded under the FP7 specific program Capacities, Grant Agreement Number 284522) and its partner the CEA.

#### REFERENCES

- [1] Swain MR, Filoso P, Grilliot ES, Swain MN. Hydrogen leakage into simple geometric enclosures. *Int J Hydrogen Energy* 2003;28(2):229–48.
- [2] Baines WD, Turner JS. Turbulent buoyant convection from a source in a confined region. *J Fluid Mech* 1969;37:51–80.
- [3] Linden P. The fluid mechanics of natural ventilation. *Annu Rev Fluid Mech* 1999;31:201–38.
- [4] Linden PF, Lane-Serff GF, Smeed DA. Emptying filing boxes: the fluid mechanics of natural ventilation. *J Fluid Mech* 1990;212:pp.309–335.
- [5] Morton BR, Taylor GI, Turner JS. Turbulent gravitational convection from maintained and instantaneous sources. *Proc R Soc Lond A* 1956;234(1196):1–23.
- [6] Woods AW, Caulfield CP, Phillips JC. Blocked natural ventilation: the effect of a source mass flux. *J Fluid Mech* 2003;495:119–33.
- [7] Carazzo G, Kaminski E, Tait S. The route to self-similarity in turbulent jets and plumes. *J Fluid Mech* 2006;547:137–48.
- [8] Bernard-Michel G. Analyses des expériences Grand GAMESAN et modèles sur la distribution de concentration d'hélium : dispositif à deux événements. Rapport OSEO, projet H2E, Rapport du L(4.1).7 EC05. 2015.
- [9] Pitts W, Yang J, Prasad K. In: Experimental characterization of a helium dispersion in a ¼ scale two-car residential garage, IEA hydrogen implementing agreement task 19 experts meeting; 2009.
- [10] Barley CD, Gawlik K. Buoyancy-driven ventilation of hydrogen from buildings: laboratory test and model validation. *Int J Hydrogen Energy* 2009;34(13):5592–603.
- [11] Merilo EG, Groethe MA, Colton JD, Chiba S. Experimental study of hydrogen release accidents in a vehicle garage. *Int J Hydrogen Energy* 2011;36(3):2436–44.