



Contribution of various techniques to U(VI) and Pu(IV) mass transfer kinetics in liquid-liquid extraction

A. Lelias, R. Berlemont, B. Dinh, M. Montuir, M. Miguirditchian, J.-P. Simonin

► To cite this version:

A. Lelias, R. Berlemont, B. Dinh, M. Montuir, M. Miguirditchian, et al.. Contribution of various techniques to U(VI) and Pu(IV) mass transfer kinetics in liquid-liquid extraction: towards the kinetics regime determination thanks to 3 technics. ATALANTE 2016 - Nuclear Chemistry for Sustainable Fuel Cycles, Jun 2016, Montpellier, France. cea-02509776

HAL Id: cea-02509776

<https://cea.hal.science/cea-02509776>

Submitted on 17 Mar 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Extraction kinetics of uranium(VI) and plutonium(IV) by N,N-dialkylamide


*towards the kinetics regime determination
thanks to 3 technics*

R. Berlemont¹, A. Lélías¹, M. Miguirditchian¹,
J.-P. Simonin²

1- CEA Marcoule, 2- UPMC

CEA Marcoule, Nuclear Energy Division
Radiochemistry & Processes Department
Modelling and Process Chemistry Separation Service
Conception of Extraction Processes Laboratory






N,N dialkylamide

- Innovative processes for Plutonium multi-recycling based on a monoamide extractant [1-3]
 - Thermodynamical data acquired
 - Hydrodynamic and hot tests carried out
- Simulation of counter-current test in mixer-settlers or pulsed columns
 - ⇒ Determination of mass transfer coefficients of U(VI) and Pu(IV) extraction
 - ⇒ Determination of the kinetics regime
- Mass transfer theory applied to liquid-liquid extraction

$$J = k_o(C_o^i - C_o) = k_a(C_a - C_a^i) = k_f C_a^i - k_r C_o^i$$

$$\frac{1}{K_a} = \frac{1}{k_a} + \frac{1}{D \cdot k_o} + \frac{1}{k_f}$$

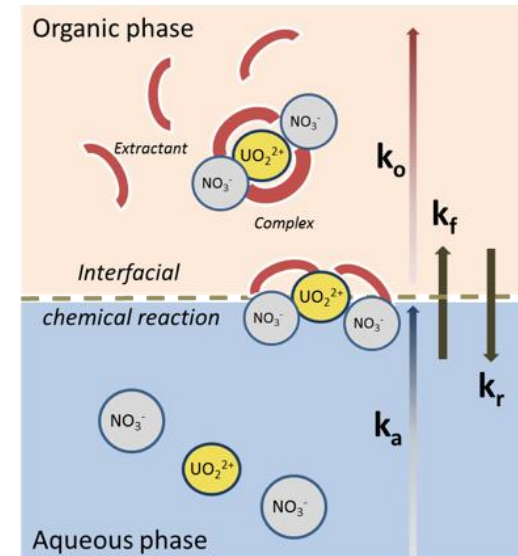


k_o, k_a : diffusion rate constants
 k_f, k_r : chemical rate constants
 D: distribution ratio

[1]: C. Musikas, P. Zorz, Process for the extraction of uranium (VI) and/or plutonium (IV), US 5132092, **1992**


[2]: Prabhu, D.R., et al., *J. Radioanal. Nucl. Chem.*, **1997**, 224(1-2) 113-117.

[3]: Pathak, P.N., et al., *Solvent Extr. Ion Exch.*, **2009**, 27(5-6) 683-694.


Techniques with constant interfacial area [4]

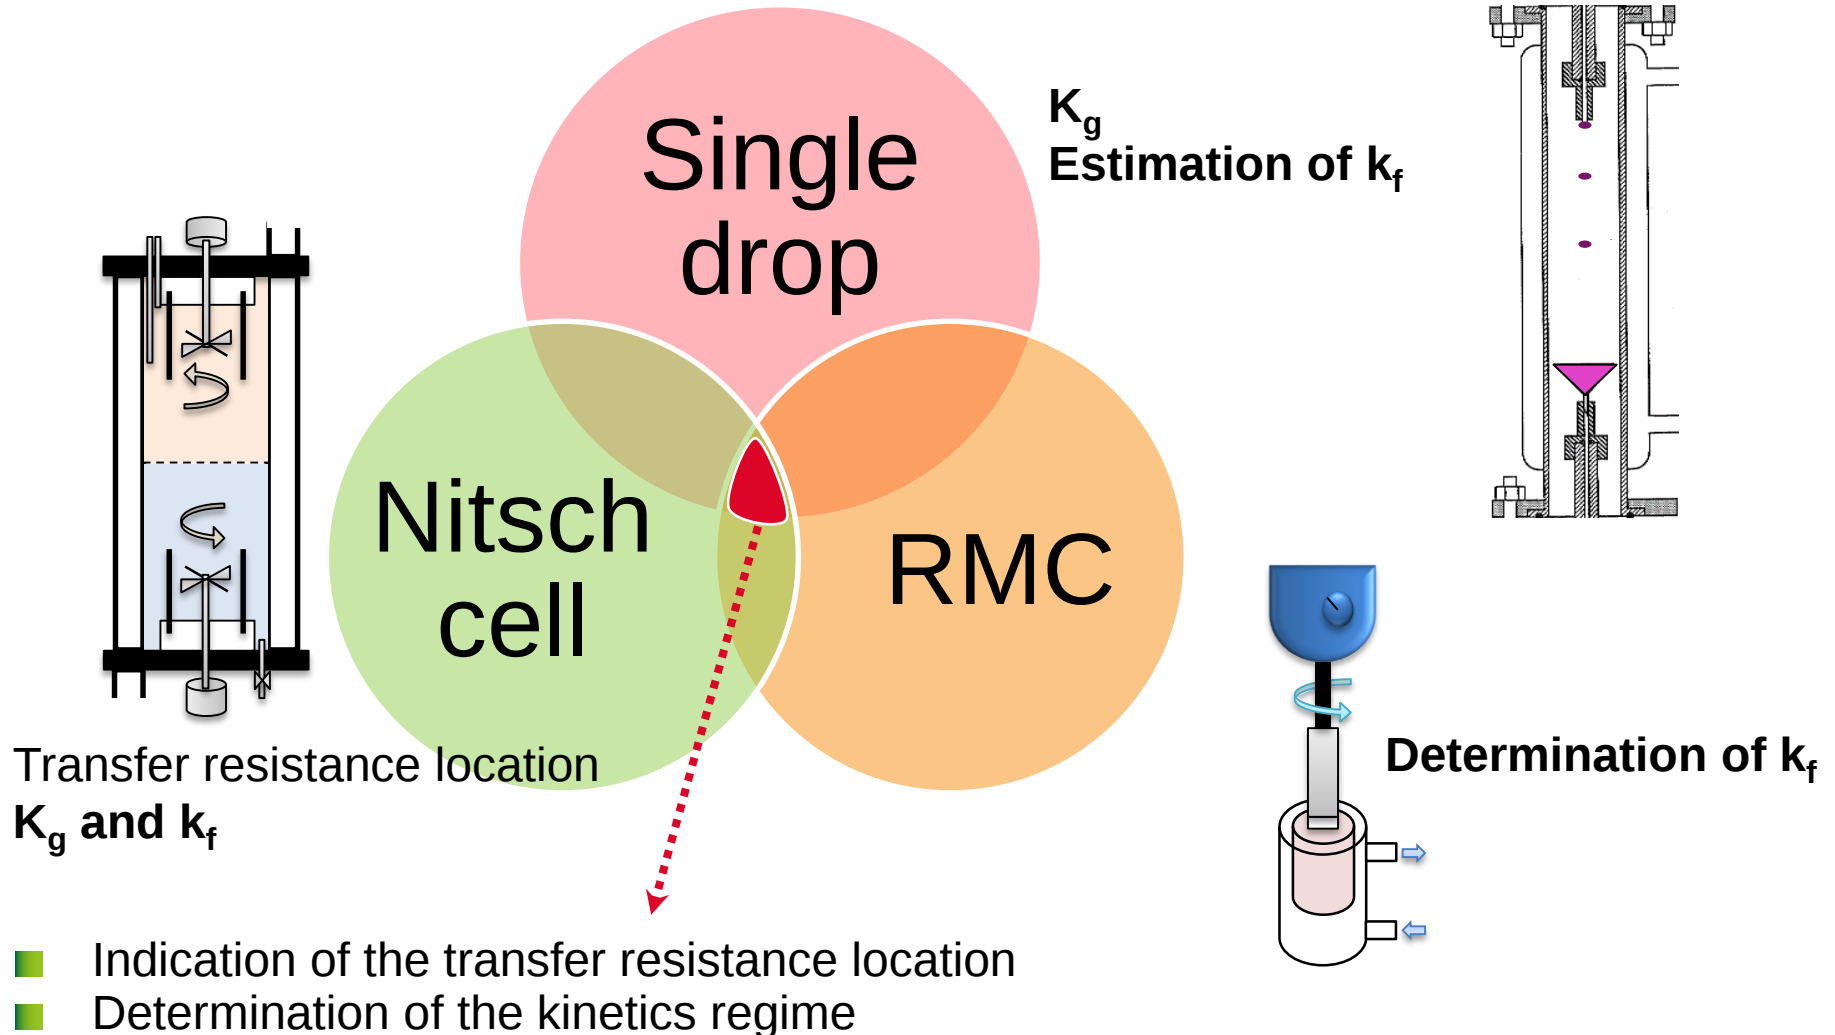

EXTRACTION KINETICS WITH U(VI): NITSCH CELL

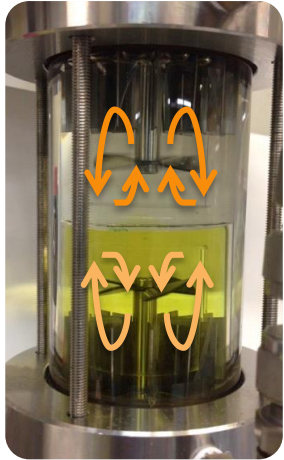


- Restricted stirring speed within the solvent : Chemical plateau unreached

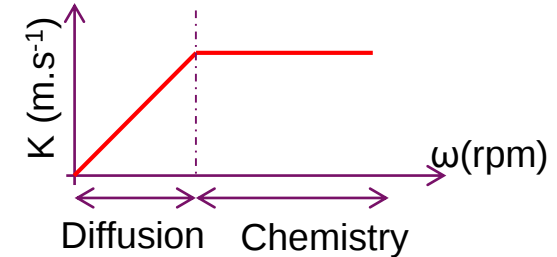

- Location of the transfer resistance

- stirrer's speed adjusted separately to keep a fixed Reynolds number in one phase

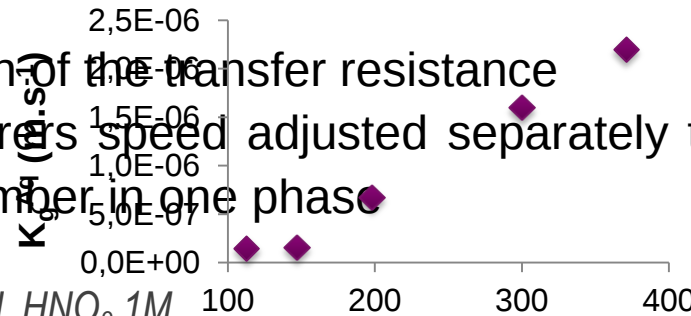

Organic phase: *N,N*-dialkylamide/TPH, HNO_3 1M

Aqueous phase: 40 g.L⁻¹ U(VI) HNO_3 5M

Temperature: 25°C


- Variation in aqueous phase

- low effect: $K_g^{\text{aq}} \approx 1.3 \pm 0.3 \cdot 10^{-6} \text{ m.s}^{-1}$


- Variation in organic phase

- High Impact: $K_g^{\text{aq}} \approx 6.5 \pm 0.3 \cdot 10^{-6} \text{ m.s}^{-1}$

- ✓ Resistance of the U(VI) transfer located in the solvent

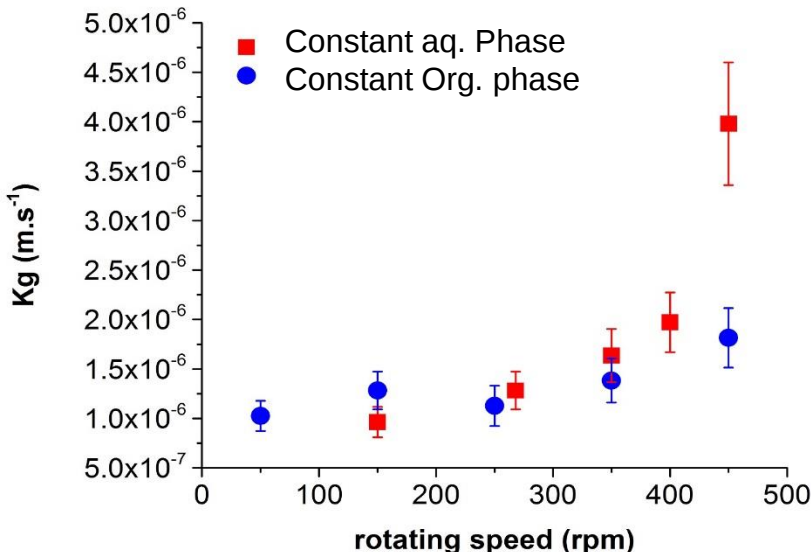

EXTRACTION KINETICS WITH U(VI) AND PU(IV): ROTATING MEMBRANE CELL

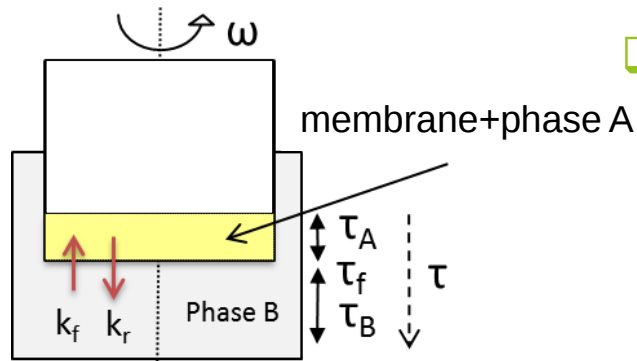

□ Direct determination of the chemical constant, k_f :



Measure of the proportion (P) of the solute transferred from A to B

Organic phase: *N,N*-dialkylamide/TPH, HNO_3 1M

Aqueous phase 1: 40 g.L^{-1} U(VI) HNO_3 5M

Aqueous phase 2: 50 mg.L^{-1} Pu(IV) HNO_3 5M

Temperature: 25°C

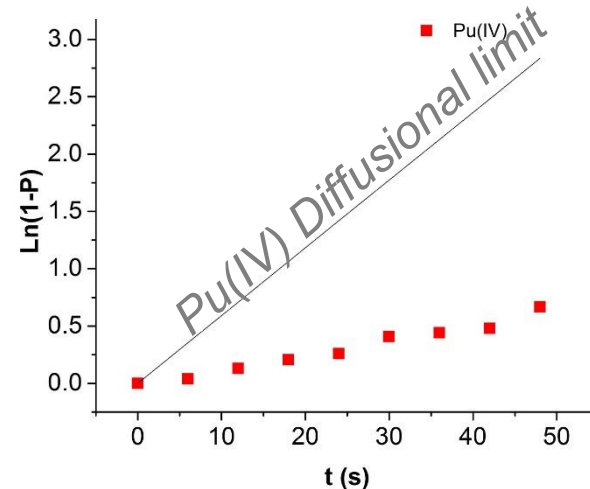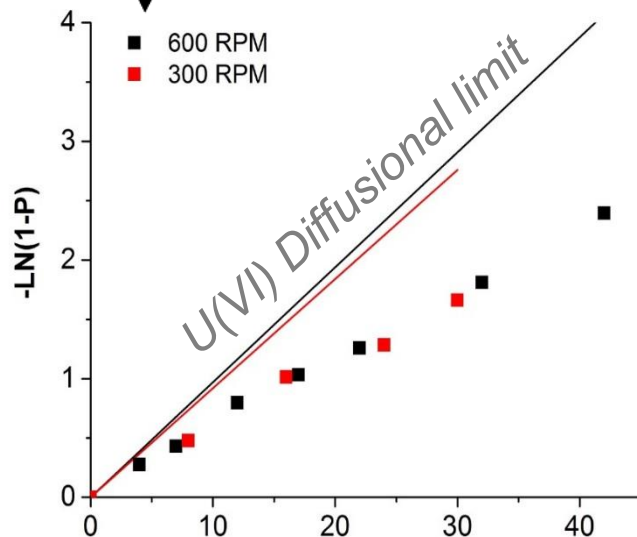


□ Extraction of U(VI) at 300 and 600 rpm

✓ $k_f (\text{m.s}^{-1}) = 1.9 \pm 0.5 \times 10^{-5}$

□ Molecular diffusion seems to control the U(VI) transfer

□ Pu(IV) under study but $\mathcal{D}(\text{Pu(IV)})$ to be acquired

EXTRACTION KINETICS WITH U(VI) AND Pu(IV): SINGLE-DROP TECHNIQUE

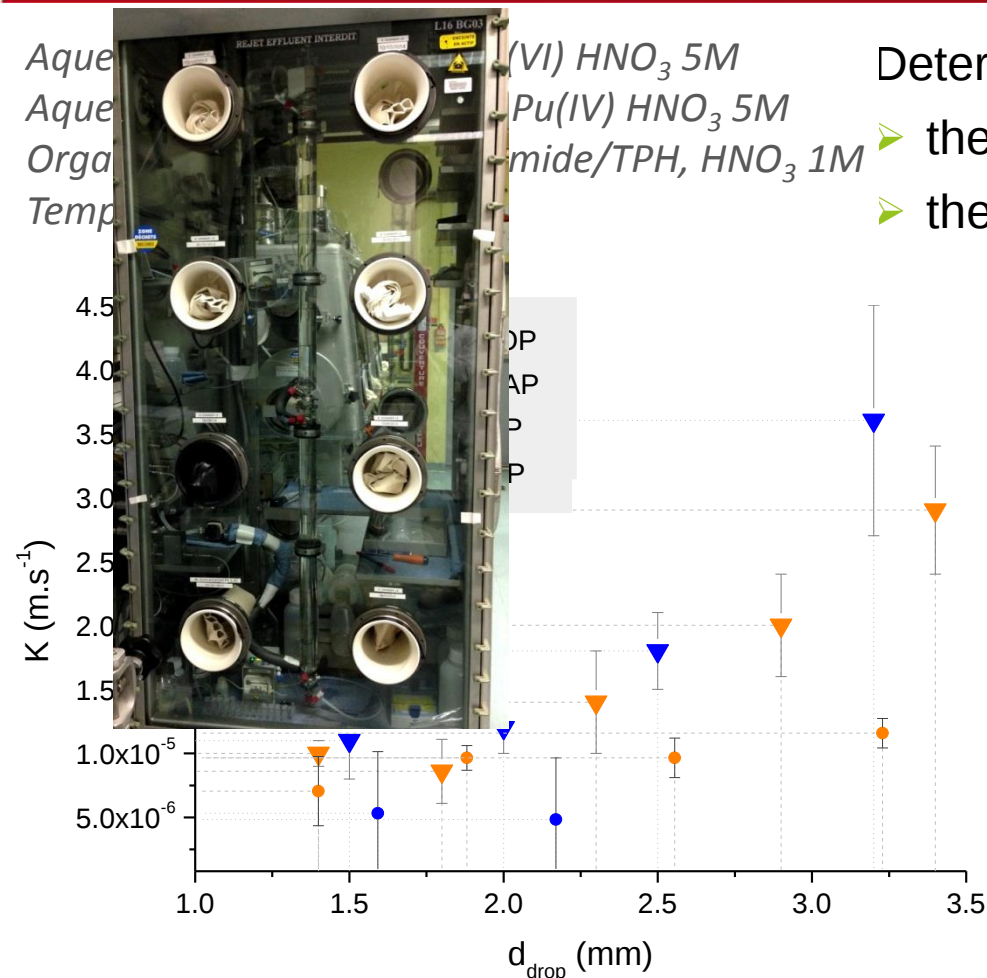

Determination of K_g (Aq or Org) depending on


- the continuous phase
- the drop diameter

Falling drop configuration (COP)

- ✓ Increase of the K_g U(VI), Pu(IV) with the drop size
- **internal circulation** inside the aqueous droplets supposed

Rising drop configuration (CAP)

- ✓ Lower effect on K_g U(VI), Pu(IV) of the Organic drop size
- High resistance to the transfer

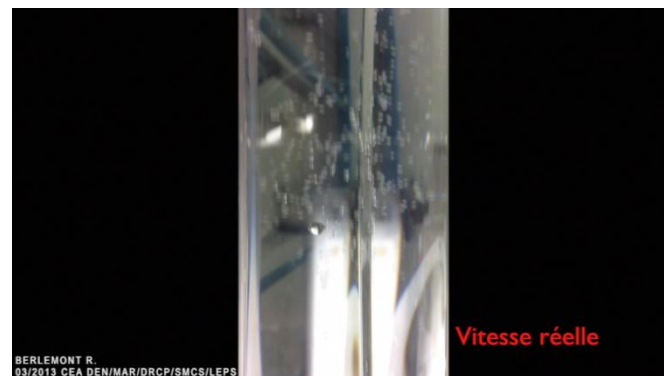

- Similar transfer of U(VI) and Pu(IV) during extraction
- Diffusional resistance in organic phase
- Diffusional control supposed


- Solvent loaded with [U(VI)] in macro-concentration (40, 80 and 100 g.L⁻¹)

Continuous organic phase (Falling drop) at 25°C

Aqueous drop 1: 40 g.L⁻¹ U(VI) HNO₃ 5M


Aqueous drop 2: 50 mg.L⁻¹ Pu(IV) HNO₃ 5M

Drop size : 2.3 ± 0.1 mm

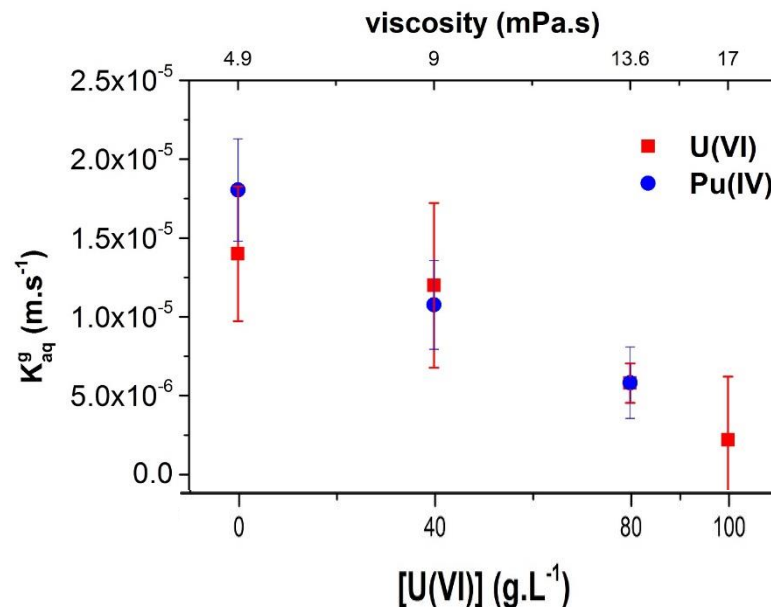

- ✓ Similar trend of the mass transfer constants: the higher the organic uranium concentration, the lower the K^g of U(VI) and Pu(IV)
- Increase of the boundary layer of the organic phase (drop interface) with the organic phase viscosity (7 to 33 μm)


⇒ **diffusional transfer**

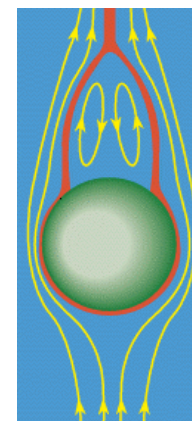

- 3 times slower than TBP/TPH but reliable data to implement the model

COMPARISON OF THE 3 TECHNIQS

U(VI)	Nitsch cell	RMC	Single drop
K_g^{Aq} ($m.s^{-1}$)	1.3 ± 0.5 $\times 10^{-6}$	/	$1.0 - 2.9$ $\times 10^{-5}$
k_f ($m.s^{-1}$)		1.9 ± 0.5 $\times 10^{-5}$	

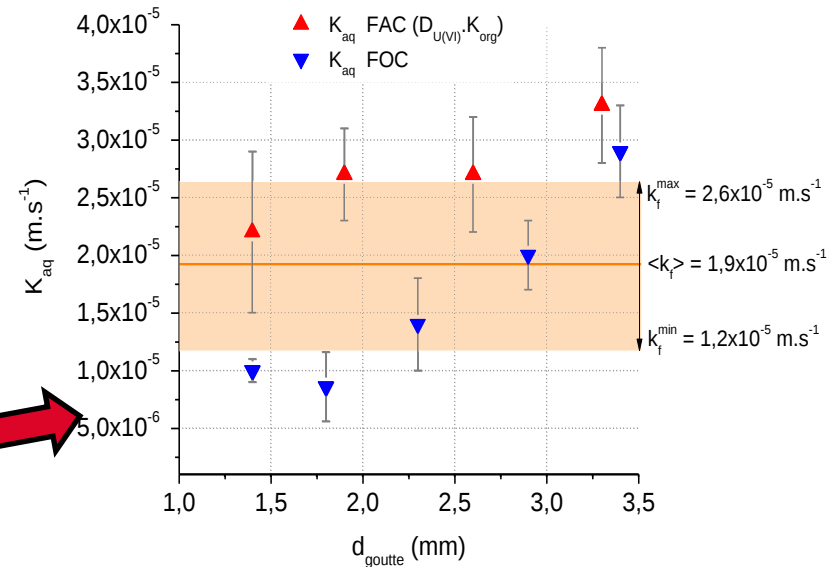

- ❑ Transfer resistance located in the organic phase
 - Nitsch cell unsuitable technique for the monoamide solvent
- ❑ Molecular diffusion seems to control the transfer
- ❑ Value of k_f of U(VI) on the same order of magnitude than the Single drop one
 - Mixed regime or data to be confirmed?
- ❑ Values in agreement with the extraction model


- Pulsed column + mixer-settler tests in stripping conditions: U(VI) faster than Pu(IV)

Continuous organic phase (Falling drop) at 25°C

80 g.L⁻¹ U(VI), 40 mg.L⁻¹ Pu(IV) HNO₃ 0.15M

Aqueous drop: HNO₃ 0.1M; $d = 3.4 \pm 0.1$ mm

	U(VI)	Pu(IV)	H ⁺
K_g^{Aq} (m.s ⁻¹)	6.2 x10 ⁻⁶	5.8 x10 ⁻⁷	6.8x10 ⁻⁷


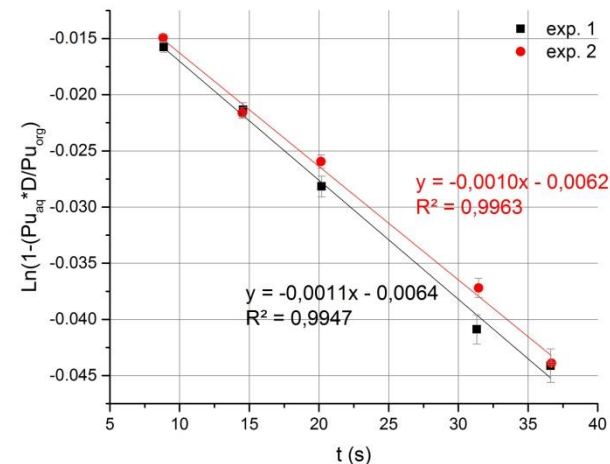


- ✓ U(VI) transfer 10 times faster

- Consistency with counter-current test observations (CBP facility)

- More information with the Atal2016 – 236 and 241 presentations

- ❑ **Single drop method: most complete study**
- ❑ U(VI) and Pu(IV) seem to have **similar behavior** during the extraction process but new experiments have to confirm that trend
- ❑ Mass **transfer probably controlled by the diffusional resistance** in organic phase
- ❑ Data reliable enough to implement the **model**
 - Determination of the mass transfer constants by **micro devices**

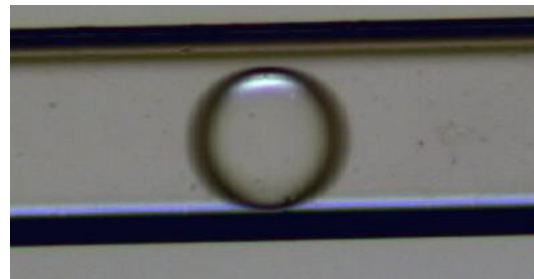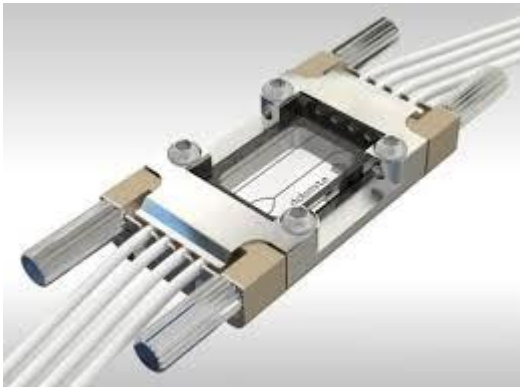

Acknowledgements



Romain Berlemont

Justine Cambe

AREVA for financial support

Jean Pierre Simonin and Binh Dinh for helpful
discussions

DTEC/SGCS/LGCI

YOU for your attention



Commissariat à l'énergie atomique et aux énergies alternatives
Centre de Marcoule | BP17171 | 30207 Bagnols-sur-Cèze Cedex
T. +33 (0)4 66 79 66 48 | F. +33 (0)4 66 79 60 27

Etablissement public à caractère industriel et commercial | RCS Paris B 775 685 019

Nuclear Energy Division
Radiochemistry and Processes Department
Separation Process Chemistry & Modelling Service
Elaboration of Separation Process Laboratory