



**HAL**  
open science

## Experimental investigation of mixing efficiency in particle laden Taylor-Couette flows

Zeinab Rida, Sébastien Cazin, Fabrice Lamadie, Diane Dherbecourt, Sophie  
Charton, Éric Climent

► **To cite this version:**

Zeinab Rida, Sébastien Cazin, Fabrice Lamadie, Diane Dherbecourt, Sophie Charton, et al.. Experimental investigation of mixing efficiency in particle laden Taylor-Couette flows. *Experiments in Fluids*, 2019, 60, pp.61. 10.1007/s00348-019-2710-9 . cea-02510031

**HAL Id: cea-02510031**

**<https://cea.hal.science/cea-02510031v1>**

Submitted on 17 Mar 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Experimental investigation of mixing efficiency in particle laden Taylor-Couette flows

Zeinab Rida · Sébastien Cazin · Fabrice Lamadie · Diane Dherbécourt ·  
Sophie Charton · Eric Climent

Received: date / Accepted: date

**Abstract** This paper reports on original experimental data of mixing in two-phase Taylor-Couette flows. Neutrally buoyant particles with increasing volume concentration enhance significantly mixing of a passive tracer injected within the gap between two concentric cylinders. Mixing efficiency is measured by planar laser induced fluorescence coupled to particle image velocimetry to detect the Taylor vortices. In order to achieve reliable experimental data, index matching of both phases is used together with a second PLIF channel. From this second PLIF measurements, dynamic masks of the particle positions in the laser sheet are determined and used to calculate accurately the segregation index of the tracer concentration. Experimental techniques have been thoroughly validated through calibration and robustness tests. Three particle sizes were considered, in two different flow regimes to emphasize their specific roles on the mixing dynamics.

**Keywords** Taylor-Couette flows · mixing · neutrally buoyant particles · PIV and PLIF techniques.

---

S. Cazin · Z. Rida · E. Climent  
Institut de Mécanique des Fluides de Toulouse (IMFT) Université de Toulouse, CNRS, Toulouse, France  
E-mail: sebastien.cazin@imft.fr  
E-mail: zeinab.rida@imft.fr  
E-mail: eric.climent@imft.fr

F. Lamadie · D. Dherbécourt · S. Charton  
CEA, Nuclear Energy Division, Research Department on Mining and Fuel Reprocessing, SA2I, F-30207 Bagnols-sur-Cèze, France  
Tel.: +33-0466396229  
E-mail: fabrice.lamadie@cea.fr  
E-mail: diane.dherbecourt@cea.fr  
E-mail: sophie.charton@cea.fr

## 1 Introduction

Solvent extraction process is generally carried out in industrial counter-current flow contactors, such as agitated or pulsed columns which typical size can be as large as 1 m diameter with throughput as high as several hundreds of cubic meters per hour. However, R&D devices dedicated to new processes (*e.g.* test of new solvent, assessment of impurities effects, etc.) require small-scale contactors, demanding reduced amount of reagents, mainly for economical and environmental issues. Typically, the inner diameter of the smallest lab-scale columns ranges from 30 mm (for Kühni-type columns) to 15 mm (for pulsed columns), with a nominal throughput of few liters per hour. Taylor-Couette flow columns have shown very high extraction performances ([1, 2]). The annular gap between the two concentric cylinders is only a few mm wide while typical flow rates are as low as few hundreds of milliliters per hour. The efficiency of such miniature Taylor-Couette columns is mainly attributed to the high shear prevailing between the contra-rotating vortices, that enables significant increase of the interfacial drop area for mass transfer. Moreover, thanks to low axial dispersion prevailing in Taylor-Vortex flow [3, 4, 5], the height of the column can be reduced by a factor 10, while achieving the same separation performances as large scale industrial columns. One important feature of such columns is their low axial diffusion coefficient. The latter accounts for all coupling phenomena between hydrodynamic and mass transfer (*e.g.* molecular diffusion, local velocity gradients, eddies, etc.). Therefore mixing prediction is a determinant point for the design of such industrial processes.

In this aim, Nemri et al. [6] studied axial dispersion in a Poiseuille-Taylor-Couette flow based on nu-

merical simulations and measurements of dye residence time distribution. A significant effect of the flow regime was evidenced on mixing due to the successive flow bifurcations. These results are consistent with previously reported experimental and numerical studies [7, 8, 9, 3, 10, 11]. Simultaneous particle image velocimetry (PIV) and planar laser-induced fluorescence (PLIF) measurements [12, 13] were combined to highlight the enhanced chaotic advection in the mixing process for wavy regimes. The purpose of the present study is to measure the specific role of a dispersed phase on the progressive mixing of dye under similar flow conditions. Solid particles will be used to model small spherical droplets encountered in extraction columns. Mixing is expected to be enhanced under two-phase flow configurations. Using LIF measurements, Metzger et al. [14] have analyzed individual particle trajectories in a cylindrical Couette flow. They measured an additional contribution to the rate of heat transfer across the cell due to non-Brownian neutrally buoyant particles. A significant increase of the effective thermal diffusivity was evidenced for low Reynolds shear flow. This effect was attenuated for dense suspension (40% volume fraction), as the steric interaction impedes the chaotic motion of the particles. Souzy et al. [15] further investigated the mechanisms responsible for this shear-induced mixing in linear shear flow. From instantaneous 2D velocity fields obtained by high-resolution PIV, they examined stretching intensity in a suspension of monodisperse PMMA particles (volume fraction ranging from 20% to 55%). The authors showed that mixing is not only increased by the particles, but also follows a different evolution compared to single-phase flow (the usual linear stretching law turns to an exponential behavior). In a recent preliminary study, similar mixing enhancement induced by particles was observed by Dherbécourt et al. [16] with neutrally buoyant particles in Taylor-Couette flows. The aim of the present study is to measure mixing efficiency for systematic variations of particle size and concentration. Following Nemri et al. [12], coupled PIV and PLIV measurements are implemented to measure mixing in steady and unsteady Taylor-Couette flow regimes. However, in the case of suspension flow, an additional issue arises. Indeed, due to the random spatial distribution of particles an additional PLIF channel is required to detect the particle boundaries thus allowing appropriate correction of the dye concentration fields.

The paper is organized as follows. The original setup, based on three synchronized optical channels (one PIV and two PLIF) is described in Sec. 2. This is used to study mixing mechanisms in particle-laden Taylor-Couette flows. Thanks to thoroughly validated post-

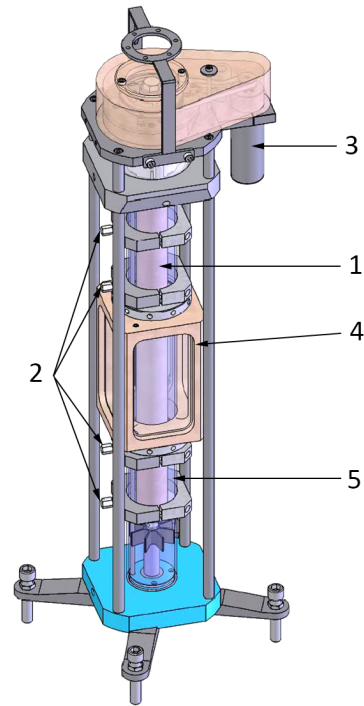


Fig. 1: Experimental device: 1. Rotor; 2. Sampling ports; 3. Motor; 4. Visualization box; 5. Stator.

processing procedures (in Sec. 2.4), reliable data on the mixing efficiency in two-phase Taylor-Couette flows are obtained. The experimental data showing the specific effect of the particulate phase on the enhancement of mixing are discussed in Sec. 3. Conclusions are drawn in the final section of the paper.

## 2 Materials and improvement of experimental techniques

### 2.1 Experimental setup and flow regimes

The Taylor-Couette configuration consists in a fluid flow driven by two coaxial circular cylinders which rotate independently along the vertical direction. In this study, the borosilicate outer cylinder, i.e. the stator, of radius  $R_e$  is kept fixed while the inner polycarbonate cylinder, i.e. the rotor, of radius  $R_i$  rotates with a controlled velocity,  $\Omega$ . A visualization box made of an optical quality glass (1 cm thick) filled with liquid of the same refractive index as borosilicate, is placed on the stator to reduce optical deformations (see Fig. 1). Since Taylor-Couette flow is very sensitive [17] to initial and flow history, a motor is connected to a ramp generator for fine velocity and acceleration tuning (resolution of  $8.10^{-4}$  rad/s) to ensure experimental reproducibility.

Stator radius ( $Re$ )	35 mm
Rotor radius ( $Ri$ )	24 mm
Gap width ( $e$ )	11 mm
Radius ratio ( $\eta = Re/Ri$ )	0.687
Height ( $H$ )	640 mm
Aspect ratio ( $\Gamma = H/e$ )	58
Rotation rate	0.1 - 100 rad/s

Table 1: Geometry of the device

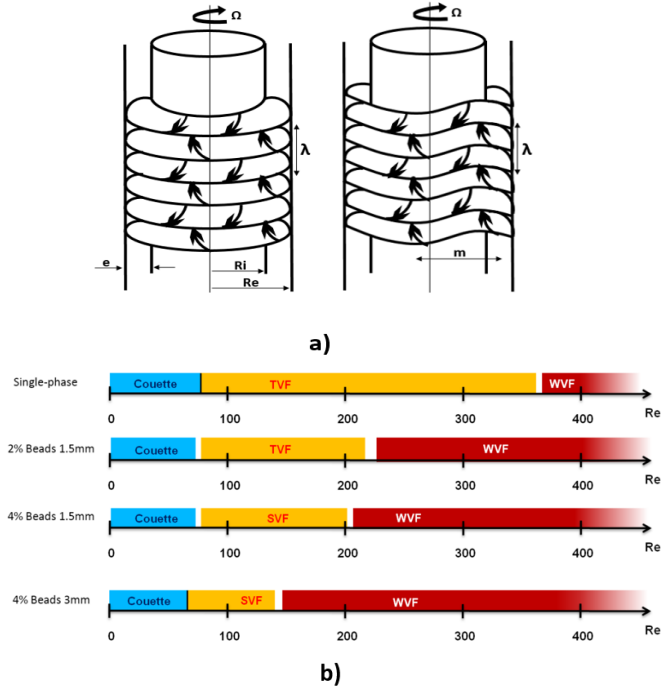


Fig. 2: a): Visualization of the flow regimes by increasing the rotation rate (TVF (left), WVF (right)), and their corresponding axial wavelengths  $\lambda$ . b) Particles effect on the flow transition. From top to bottom: single-phase flow configuration,  $R_i/R_e = 0.687$  and two-phase flows with increasing bead size and concentrations,  $R_i/R_e = 0.687$ .

The geometric characteristics of the experimental device are presented in Tab. 1.

### Determination of flow regimes

The Reynolds number  $Re_\Omega$  (Eq. 1) is a dimensionless quantity which compares the relative magnitude of inertia and viscous effects. It is convenient to identify the successive transitions between different flow regimes in Fig. 2. The Reynolds numbers of transition between different regimes depend on the geometry of the column [18, 19].

$$Re_\Omega = \frac{\Omega R_i e}{\nu} \quad (1)$$

When the rotation rate,  $\Omega$ , increases, successive instabilities occur (characterized by the formation and oscillation of vortices). Considering single-phase flow, Andereck et al. [20] elaborated a detailed phase diagram composed of the 26 possible stable configurations observed when the two cylinders are allowed to rotate. When the outer cylinder is at rest, only 5 regimes are commonly observed for single-phase flows. The Couette regime, which is the first regime that appears at low Reynolds, is laminar and steady (its velocity profile is provided in standard textbooks). The fluid velocity has a single velocity component along the azimuthal direction, and depends only on the radial distance  $r$  from the axis of rotation. When the rotation rate increases, Taylor Vortex Flow regime (TVF) appears. It results from a centrifugal instability that leads to the formation of toroidal vortices in the flow direction. These vortices are perpendicular to the axis of rotation and are organized by pair (contra-rotative vortices). The flow in TVF regime is still axisymmetric and steady. For a given Reynolds number  $Re$ , the flow configuration is characterized by its axial wavelength,  $\lambda$ , that represents the length of a pair of vortices (typically  $\lambda$  is slightly larger than  $2e$  where  $e$  is the gap width between the two cylinders).

By further increasing the rotation velocity, the vortices start to deform and undulate periodically. This corresponds to the Wavy Vortex Flow (WVF) regime which is fully tri-dimensional and unsteady, characterized by the axial wavelength,  $\lambda$ , and the azimuthal wavenumber  $m$ , as shown in Fig. 2a. At higher Reynolds numbers, the vortices deform and a progressive transition to Turbulent Taylor Vortex Flow regime occurs.

A usual procedure was used to determine the transition between the flow regimes in the two-phase flow configurations. The liquid phase was seeded with micrometric inert particles of mica ( $4\text{-}32 \mu\text{m}$ ), known as kalliroscope flakes. In presence of incident light, the kalliroscope reflects light yielding streamlines to become visible. This method allows a direct measurement of the axial wavelength of the flow regime. Under our experimental conditions, transitions between regimes for single-phase flow were determined by Nemri et al. [6]. They are summarized in Fig. 2b which also shows the flow regimes we identified for the two-phase configurations in which mixing will be investigated. In our experiments, due to the presence of particles, an additional regime has been observed which is not expected in a



single-phase flow where the outer cylinder is at rest. This Spiral Vortex Flow regime (SVF) was indeed only observed for single-phase flow when the two cylinders have high negative relative velocities. In this regime, the vortices are no longer perpendicular to the rotation axis, but form a couple of intertwined spirals. The flow is unsteady and not axisymmetric. The geometrical parameter that describes SVF flow is still the axial wavelength  $\lambda$ . Those observations are consistent with [21] where they focused on determining the influence of particle loading and size on inertial flow transitions. They observed that the primary effects of the particles were a reduction of the maximum Reynolds number for the circular Couette flow and several non-axisymmetric flow states not seen for a pure fluid with only inner cylinder rotation

#### Adjustment of refractive indexes

Measurements in two-phase flows is always technically challenging. One possible method to address this, frequently implemented in bubbly flows, is to extract dynamic masks of the bubble interfaces from PIV measurements combining another shadowgraphic channel [22, 23]. Instead, we propose to use a second PLIF channel [24, 25], dedicated only to the accurate detection of particles, while the first one is aimed at tracking the tracer for the mixing study, as in single-phase configuration [13].

The continuous and dispersed phases were selected very carefully. The viscosity of the continuous phase must remain moderate in order to reach the target regimes; given the maximum torque of the rotor. The dispersed phase, in addition to being transparent, must be resistant to chemicals of the liquid phase. The bead size must also be accurately calibrated and density finely matched with the liquid to prevent sedimentation and creaming. Additionally, refractive indexes between the two phases and the stator must be matched to cancel optical perturbations during measurements. Calibrated beads of polymethyl methacrylate (PMMA) with diameters ranging from  $800 \mu\text{m}$  to  $3 \text{ mm}$  have been selected. For the liquid phase, an aqueous mixture of dimethylsulfoxide (DMSO), thiocyanate of potassium (KSCN), and water was chosen. The respective proportions of the three liquids were tuned experimentally to reach the beads properties in terms of refractive index and density.

For this purpose, a small glass-wall tank ( $15 \times 30 \times 30 \text{ mm}$ , noted 2 in Fig. 3) was used. The tank width is ex-

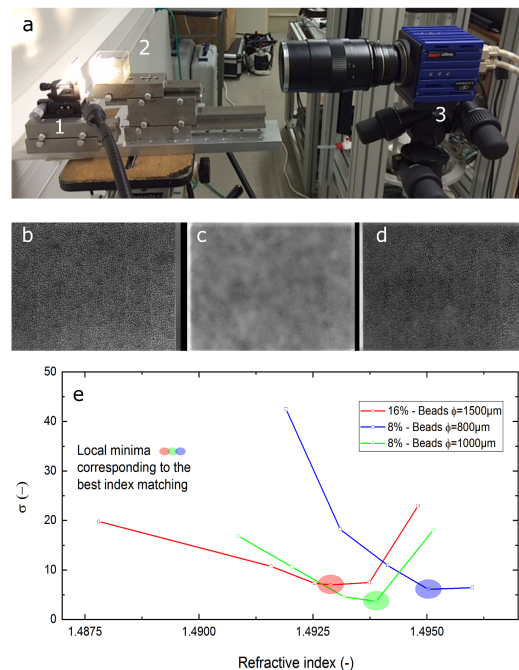


Fig. 3: (a) Experimental setup used to match refractive index and density - Images of the random pattern used for PIV correlation in the tank for a perfect matching (b), a lack of matching (c) and a partial matching (d) - (e) The best mixture of fluids is achieved for the local minimum of each curve.

ceeding the maximum fluid cross-section observable in the experimental setup ( $25 \text{ mm}$ ). A PIV random pattern (noted 1 in Fig. 3) was placed on a micrometer stage behind the tank while a sCMOS camera equipped with a  $100 \text{ mm}$  lens (noted 3 in Fig. 3) was positioned in front of the tank to record the pattern across the content of the tank. The tank was initially filled with the liquid mixture having refractive index close to the particle material, and the focus on the target image was adjusted. Then, a given amount of beads is introduced and acquisition of a first frame for PIV correlation is done. The random pattern was then moved one millimeter sideways with the micrometer stage before the acquisition of a second frame. Figs. 3b-c-d correspond respectively to a perfect matching, a lack of matching and a partial matching, illustrate the typical images used for the PIV correlation process. From these images, mean value, standard deviation ( $\sigma$ ) and probability density function of the displacement extracted from PIV pair correlation are determined. Those steps were repeated while progressively adjusting the composition of the mixture until minimum standard deviation was reached for the PIV measurements (see Fig. 3e for three bead sizes). For each size of beads, this 'merit function'

Solid / Liquid phase systems	$\rho$ (g/cm <sup>3</sup> )	$n$	$\mu$ (mPa.s)
800 $\mu$ m PMMA particles	1.185	1.4953	-
DMSO 79.81% KSCN 17.26% 2.93% water		1.4953	9.513
1 mm PMMA particles	1.185	1.4934	-
DMSO 76.75% KSCN 18.59% 4.66% water		1.4935	10.143
1.5 mm PMMA particles	1.185	1.4929	-
DMSO 77.17% KSCN 17.98% 4.85% water		1.4926	9.510

Table 2: Physical properties of liquid/solid phases (at 23°C). Percentage is equivalently per mass or per volume since both phases have equal densities.

exhibits a minimum corresponding to the best matching of refractive index between the beads and the mixture of fluids. Thanks to this systematic procedure, an optimal mixture is determined for each bead size and composition. The physical properties of the dispersed and continuous phases are summarized in Tab. 2.

## 2.2 PIV / PLIF setups description and calibration

### PIV measurements

The liquid phase is seeded with hollow glass spheres (10  $\mu$ m mean diameter and 1.1 g.cm<sup>-3</sup>) as PIV tracer particles, as shown in Fig. 4 (top). The light source is a dual-cavity doubled Nd:YAG (nanoPIV Litron<sup>TM</sup>) pulsed laser emitting at 532 nm, with a maximum shoot frequency of 100 Hz in each cavity. A LaVision<sup>TM</sup> sCMOS camera associated to a bi-telecentric Opto-Engineering<sup>TM</sup> objective of 181 mm working distance, takes the doublets of images. The cropped visualization field is a 11 x 44 mm rectangle. A band-pass filter (532 nm) is placed between the sensor of the camera and the telecentric lens to cut off the light coming from the fluorescent tracers. An appropriate post-processing, using DaVis<sup>TM</sup> software, gives access to the instantaneous 2D velocity vector field in the cross-section of the flow. Acquisition devices are presented in Fig. 7 (left).

### PLIF measurements

Planar laser-induced fluorescence (PLIF) visualizes the evolution of fluorescent tracer concentration as in Nemri et al. [12] for single-phase flows. The presence of beads in the flow requires the use of two PLIF channels. Indeed, the tracer can not penetrate the beads hence leaving dark holes in the laser sheet. Because of the high intensity that results while injecting the fluorescent tracer, a simple intensity threshold is not sufficient to detect the boundaries of the beads. Therefore, two

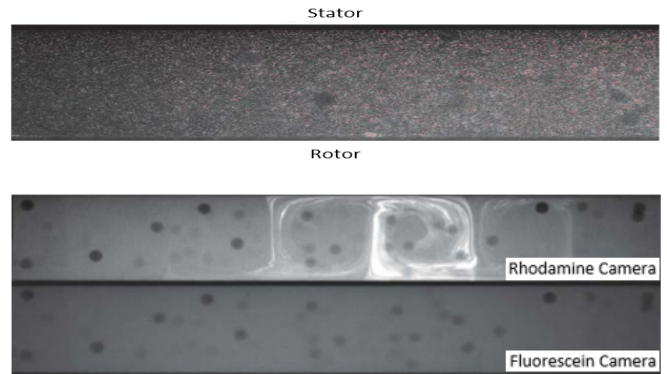


Fig. 4: Top: PIV image obtained in the presence of 1.5 mm beads, the image is cropped to fit with the region of interest and rotated by 90°. Bottom: Two simultaneous acquisitions of the PLIF rhodamine WT image (top) and the fluorescein image (bottom). Case of a 4% volume concentration of 1.5 mm beads in TVF regime ( $Re = 90$ ).

fluorescent tracers are used (Fig. 4, bottom). Fluorescein tracer in uniform concentration is used as a reference to easily detect the beads. Thanks to proper post-processing, dynamic masks with black holes are created at the bead locations. Rhodamine WT tracer is used to monitor the dye concentration during mixing while the dynamic mask is superposed on this PLIF channel's image in order to remove the light signal at the exact particle locations. The different emission spectrum of each fluorescent tracer (as shown in Fig. 5) allows the fluorescent signals to be separated when using the appropriate colored filters. Therefore, two fluorescent tracers are used (Fig. 4, bottom). Fluorescein tracer in uniform concentration is used as a reference to easily detect the beads. Thanks to proper post-processing, dynamic masks with black holes are created at the bead locations. Rhodamine WT tracer is used to monitor the dye concentration during mixing while the dynamic mask is superposed on this PLIF channel's image in order to remove the light signal at the exact particle locations. The different emission spectrum of each fluorescent tracer (as shown in Fig. 5) allows the fluorescent signals to be separated when using the appropriate colored filters.

Two sCMOS cameras with 105 mm Nikon lenses are used to separate the information of each fluorophore. A field separator is implemented that dispatch the same image to the two cameras. Two high-pass filters (at 625 nm) allow to recover a maximum rhodamine light intensity by cutting off part of the fluorescein and PIV particles emitted light. Additionally, two low-pass filters (at 525 nm) on the second camera are mounted to

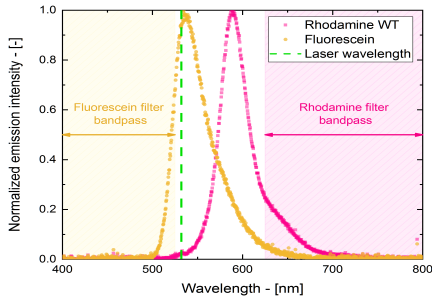


Fig. 5: Emission spectrum of fluorescein and rhodamine WT

cut off all the emission signal from the rhodamine and PIV particles. Using two identical filters on each camera improves the separation quality by increasing the optical density.

The visualization fields of the PLIF are larger than the one used for PIV ( $74 \times 88$  mm), due to higher resolution required in PIV than in PLIF. Hence, a geometrical adjustment of the corresponding images between the fluorescein and the rhodamine image recording was applied. The PLIF device is shown in Fig. 7 (right).

A 25 mg/L rhodamine concentration provides optimal optical signal for our sCMOS camera. Based on preliminary tests, only 70% of the 200 mJ laser power was applied to prevent any photobleaching effect.

For each experimental condition, the following procedure was used. The column is filled with the mixture of DMSO-KSCN-water and beads matched in density and refraction index. A fixed concentration of fluorescein, typically 0.5 mg/L is added to detect the beads and create the masks. Then, a given quantity of rhodamine (25 mg/L) and fluoresceine (0.5 mg/L) is injected (0.5 mL at a rate of 3 mL/min, and 3 mL at 12 mL/min respectively for TVF and WVF flow regimes). Injection is operated under controlled conditions at the center of the measuring area through a capillary [12, 16]. These injection conditions were selected to minimize the flow perturbation.

### 2.3 Mixing quantification

Following the definition proposed by Ottino [26] and the previous investigations of Dusting and Balabani [27] and Nemri et al. [12], a segregation index (Eq. 2) is used to quantify mixing efficiency. The mixing index is based on the concentration standard deviation  $\sigma_C^2(t)$  and the maximum mean concentration  $\sigma_0^2(t) = \overline{C}(t)(1 - \overline{C}(t))$ .

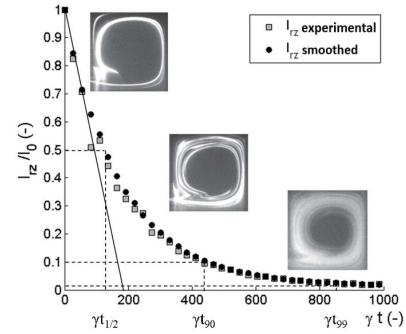


Fig. 6: Example of mixing time and initial rate of decay of  $I_{rz}$  (open symbols stand for raw data and dark symbols for the processed data using a smooth interpolating function with a sliding average filter) [12].

$$I(t) = \frac{\sigma_C^2(t)}{\sigma_0^2} \quad (2)$$

#### *Intra-vortex mixing*

We focus on the index of intra-vortex mixing,  $I_{rz}$ , which corresponds to mixing within a single vortex along the radial and vertical directions.

To calculate  $I_{rz}$ , an average image  $C_{rz}(t)$  of each vortex is calculated for every rotational period  $T_c$ .

$$C_{rz}(t) = \frac{\sum_{k=1}^K C_k(t)}{K} \quad (3)$$

Then, the variance  $\sigma_{C_{rz}}^2(t)$  is calculated for each average image from the mean concentration  $C_{rz}(t)$  with  $K$  the number of periods:

$$\left\{ \begin{array}{l} \overline{C}_{rz}(t) = \frac{\sum_r \sum_z C_{rz}(t)/C_0}{S} \\ \sigma_{C_{rz}}^2(t) = \frac{\sum_r \sum_z (C_{rz}(t)/C_0 - \overline{C}_{rz}(t))^2}{S} \end{array} \right. \quad (4)$$

$S$  is the number of pixels in the image of the vortex.

In all cases, the temporal evolution of the segregation index is a decreasing function of time, variance tends to zero until a uniform concentration is reached. Three specific times are defined to measure mixing efficiency:  $t_{1/2}$ ,  $t_{90}$  and  $t_{99}$  that correspond to the time at which  $I_0/2$ ,  $I_0/10$  and  $I_0/100$  are reached respectively,  $I_0$  corresponding to the injection time which is used as

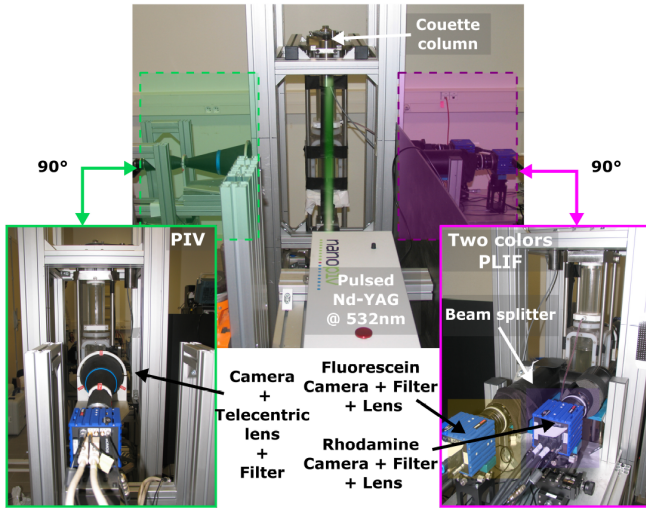


Fig. 7: Experimental devices for the coupled PIV/PLIF measurements.

a reference (Fig. 6). The mixing characteristic times are scaled with the mean shear rate (Eq. 5).

$$\gamma = \frac{\Omega R_i}{e} \quad (5)$$

The initial rate of decay,  $R_d$ , is also used as a measure of mixing efficiency:

$$R_d = - \left. \frac{dI(t)}{dt} \right|_{t=0} \cdot \frac{1}{\gamma I_0} \quad (6)$$

## 2.4 Quantification of mixing for two-phase flows

### *Coupled PIV/PLIF measurements*

The experimental set-up is illustrated in Fig. 7. All equipments are assembled and synchronized together to perform PIV and PLIF sequence recording. Sub-steps of the post-processing procedure to access the mixing characteristics are summarized in Fig. 8. PIV measurements provide the velocity fields which are used to characterize the vortices: minima of flow velocity stand at the vortex boundaries, which correspond to stagnation points. Using a uniform concentration of fluorescein, images are processed to extract the beads shapes, and build the corresponding dynamic masks which are then subtracted from the rhodamine images of the second PLIF channel. Finally, the corrected PLIF rhodamine images provide information on concentration fields in each vortex to calculate the segregation indexes.

The PIV results are used to extract the boundaries of the cellular vortices. In order to reduce noisy detection of the stagnation points in the velocity field, a

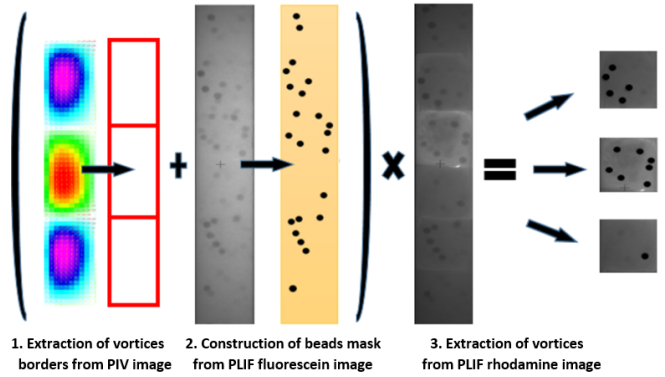


Fig. 8: Coupled PIV/PLIF image post-processing.

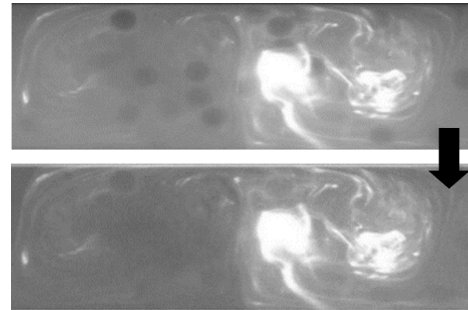


Fig. 9: Top: Rhodamine image before normalization. Bottom: Rhodamine image after normalization.

large interrogation window with an important overlap has been chosen. Due to a longer light pathway at the rotor compared to the stator, a thinner interrogation window would result in strong fluctuations in the velocity field measurements.

The inter-correlation algorithm is initialized with  $128 \times 128$  cells size and decrease to  $64 \times 64$  pixels with an overlap percentage of 95%. This results in velocity fields composed of  $855 \times 337$  vectors in the  $2048 \times 350$  pixels image. The accuracy for the detection of stagnation points is typically less than 3 pixels.

Automatic thresholding and circular Hough detection method [28] were used to create the masks corresponding to the presence of beads in fluorescein images. Beads standing in front or behind the laser sheet are not detected, but reduce light intensity in the images. The effect of these beads could be corrected by the normalization of rhodamine images by the fluorescein images, as depicted in Fig. 9.



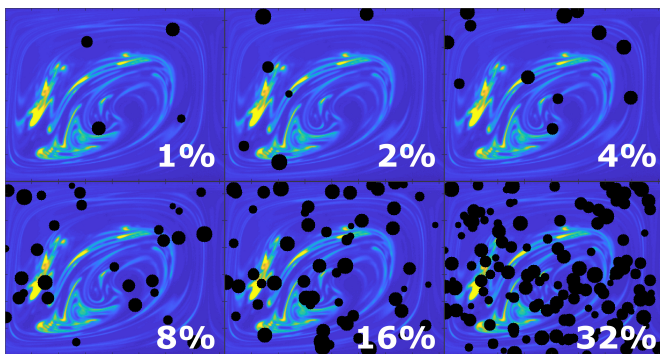


Fig. 10: Typical images to determine the impact of beads mask.

## 2.5 Validation tests and reproducibility

### *Influence of dynamic masks*

To estimate the impact of the dynamic masks on mixing characterization for high particles concentration, a specific analysis has been carried out. Based on a reference single-phase case, a synthetic image is generated, in which virtual particles are randomly seeded. This way, masks composed of dark disks were generated for concentration ranging from 1% to 32% with 800  $\mu\text{m}$  diameter (Fig. 10). The numerical procedure is implemented as follows. First, region of interest corresponding to one vortex is extracted from the image and multiplied by a random binarized masks (i.e. forcing 0 inside the beads mask and 1 outside). Then, the intra-vortex mixing index  $I_{rz}$  is calculated in two different ways: i) excluding the zeros from the calculations (which simulate the use of the dynamic masks), ii) considering all pixels in the image (naive post-processing ignoring the two-phase nature of the flow).

The whole process has been applied to more than 4000 frames to measure the difference between the two methods of calculating the segregation index. A significant discrepancy exists for the naive post-processing which considers the entire image (Fig. 11-(a)) while in Fig. 11-(b) all curves obtained with the mask correction collapsed onto the reference single-phase flow evolution. The test clearly shows that considering the correction provided by the dynamic masks is reducing significantly the mean difference (see Fig. 11-(c)) on mixing quantification especially when the particle volume concentration exceeds few percents. This study on synthetic images confirms the relevance of using two simultaneous PLIF images (one for mixing quantification and one for bead detection/dynamic masks creation). This reduces by more than one order of magnitude the error on quantification of mixing.

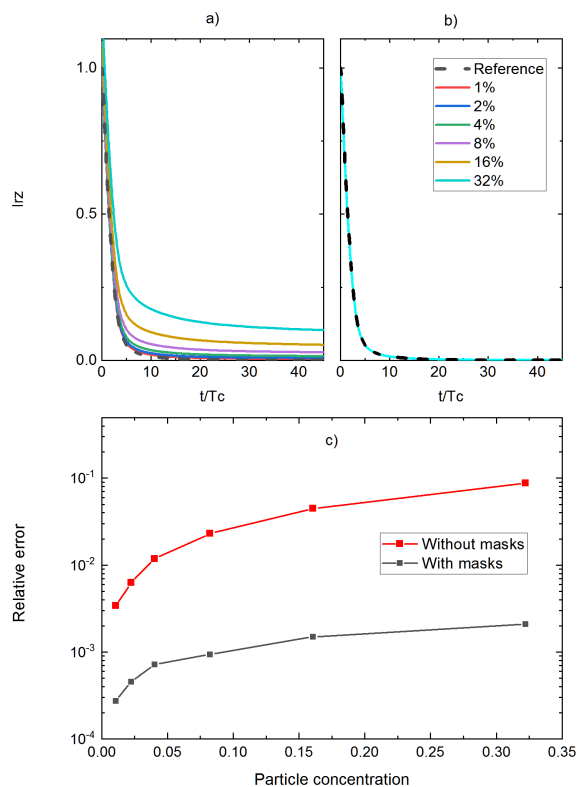


Fig. 11: (a)  $I_{rz}$  as a function of time without dynamic masks correction, (b)  $I_{rz}$  as a function of time with dynamic masks correction, (c) Evolution of relative error with increasing volume fraction of particles.

### *Robustness and reproducibility of experimental results*

Additionally, three tests have been carried out to assess the robustness of the segregation indexes calculation. The conclusion is drawn from 4% volume concentration experiments with 1.5 mm diameter beads.

- First the influence of borders detection is addressed. To this end, the borders of the region of interest was varied, i.e. by adding or removing 10 pixels on each border side (20 pixels on each vortex). A typical vortex has a length larger than 400 pixels and a width of 380 pixels. As illustrated in Fig. 12 (top left), adding or removing 5% of the image does not change drastically the mixing quantification. The mean difference on mixing index is respectively 0.0043 and 0.00425 for each case. This demonstrates the accuracy of the vortex detection method.
- Second, the threshold used in the Hough algorithm for the beads detection was varied by  $\pm 20\%$ . The reference case in Fig. 12 (top right) is compared to the two cases for which bead detection is respectively over or underestimated. The mean difference

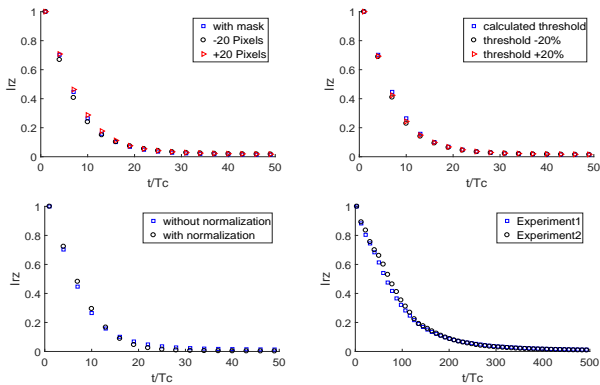


Fig. 12: Sensitivity analysis on  $I_{rz}$ : (top left) adding or removing 20 Pixels, (top right) varying the threshold, (bottom left) with and without normalization and (bottom right) repeating the same experiment twice.

on mixing quantification is respectively 0.0026 and 0.0029 for each case. Again, no significant variation is observed.

- Third, the impact of applying a normalization process to the image was evaluated. The normalization was applied either before or after the beads detection. Little difference can be observed in Fig. 12 (bottom left), and the relative error on mixing quantification is 0.0106. Hence, normalization will not be considered in the following.

Finally, the reproducibility was assessed. In this aim, the same experiment has been repeated twice (4% volume concentration of 0.8 mm diameter beads). As shown in Fig. 12 (bottom right), the  $I_{rz}$  curves measured in the two cases are very close, the mean difference on mixing quantification is 0.0073.

### 3 Measurements of mixing in two-phase flows

Using the procedure detailed in previous sections, the effect of the dispersed phase on the intra-vortex mixing has been studied using the segregation index evolution  $I_{rz}(t)$  and the corresponding mixing times. Mixing is quantified by both the initial rate of decay,  $R_d$ , of the segregation index, and the time required to obtain full mixing  $t_{90}$ . Time scales are made dimensionless by using the mean shear rate. While  $R_d$  measures mixing efficiency in the first instants after tracer dye injection,  $t_{90}$  rather gives an estimate of the time required for complete mixing of the tracer.

Three particle sizes have been selected: 0.8 mm, 1 mm and 1.5 mm diameter. Although particles are neutrally buoyant, they are not following the fluid streamlines. Indeed, finite size effects coupled to the mean

shear and secondary flows are likely to yield hydrodynamic interactions, particle collisions, and therefore trajectory fluctuations. The size ratio between the particle diameter and the gap between cylinders ranges from 0.073 to 0.14. The size of the vortices is typically similar to the gap width when the axial wavelength is  $\lambda = 2e$ . Particle volume concentration is varied from 0% (single-phase flow) to 8%, which corresponds to dilute or moderately concentrated suspensions. Non-linear effects due to multibody hydrodynamic interactions is anticipated to play a role in mixing enhancement. Two different hydrodynamic regimes are investigated, Taylor Vortex Flow (TVF) and Wavy Vortex Flow (WVF). The results section is organized as follows: effect of particulate concentration is investigated first, then the effect of particles size is addressed.

#### 3.1 Effect of the particle concentration

We study the influence of the particle concentration while fixing the particle size for the two different flow patterns. In order to properly measure mixing enhancement, we have chosen flow patterns with a fixed wavelength at a prescribed Reynolds number. This is operated by selecting carefully the experimental procedure to have reproducible hydrodynamic properties. The rotor achieves its final rotation rate with a controlled ramp of acceleration.

##### *TVF regime ( $Re=100$ )*

In the TVF regime, the single-phase flow is steady. Therefore the presence of particles is the only source of velocity fluctuations that couple to stretching and folding of dye streaklines close to stagnation points between vortices. Shear-induced particle agitation participates to mixing by the carrying fluid flow. The results for particle diameters 1 mm and 1.5 mm are shown in Figs. 13 and 14, varying the particle concentration from 2% to 8%. We observe an increase of the initial rate of temporal decrease of  $I_{rz}$  in the two-phase configurations, and a reduction of the time required for full mixing, as well. Clearly, the cumulative effect of particles enhances mixing when concentration increases for a given flow configuration. As shown in figures and tables, while the enhancement of mixing is very similar during the early stages after tracer injection, larger particles yield significant reduction of the time required to achieve homogeneous spatial distribution of dye (corresponding to  $I_{rz} = 0$ ). The results do not show a linear scaling with concentration as expected in a very dilute regime.

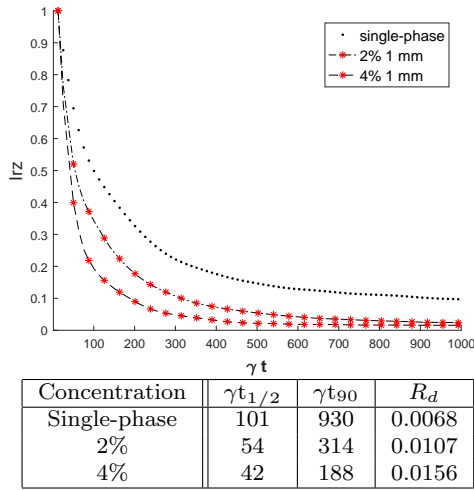


Fig. 13: Influence of the particle concentration on the intra-vortex mixing  $I_{rz}$  in TVF regime for particle size of 1mm ( $Re=100$ ,  $\lambda = 2.25e$ ). Mixing times and initial decay rate are reported in the table.

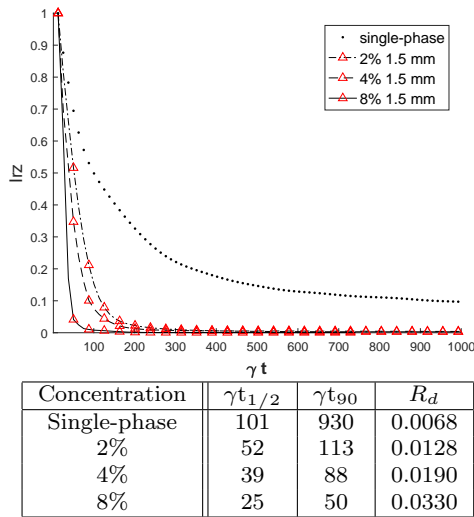


Fig. 14: Influence of the particle concentration on the intra-vortex mixing  $I_{rz}$  in TVF regime for particle size of 1.5 mm ( $Re=100$ ,  $\lambda = 2.25e$ ). Mixing times and initial decay rate are reported in the table.

#### WVF regime ( $Re=600$ )

At higher Reynolds numbers, the flow exhibits unsteady secondary flows which are reinforced by the presence of particles. In the single-phase flow, azimuthal oscillations of the vortices participates to enhanced mixing compared to the steady TVF flow patterns. Similar conclusions can be drawn in the WVF regime. According to Figs. 15 and 16, increasing the suspension concentration from 1% to 4% promotes intra-vortex mixing and

larger particle size has also a favorable effect on mixing. The mixing time  $t_{90}$  is typically reduced by a factor 3 when the concentration reaches 4%.

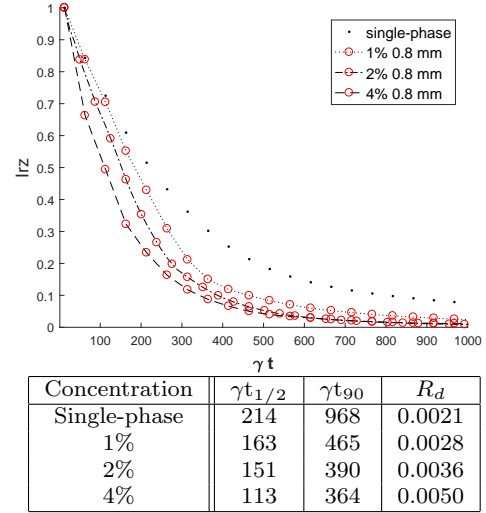


Fig. 15: Influence of the particle concentration on the intra-vortex mixing  $I_{rz}$  in WVF regime for particle size of 0.8mm ( $Re=600$ ,  $\lambda = 2e$ ). Mixing times and initial decay rate are reported in the table.

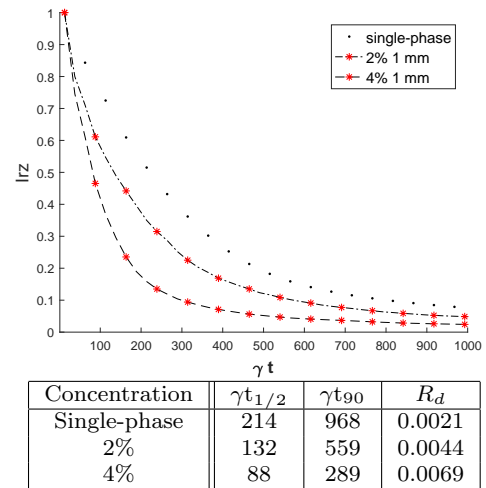


Fig. 16: Influence of the particle concentration on the intra-vortex mixing  $I_{rz}$  in WVF regime for particle size of 1 mm ( $Re=600$ ,  $\lambda = 2e$ ). Mixing times and initial decay rate are reported in the table.



### 3.2 Effect of the particle size

To investigate the influence of the particle size, the particle diameter was changed under fixed flow conditions (particle volume concentration and flow regime).

#### *TVF regime*

As shown in Fig. 17, for a particle concentration equal to 1%,  $I_{rz}$  decreases faster when the particles size increases from 0.8 mm to 1.5 mm. Time needed to reach a uniform distribution of the tracer is lower for the 1.5 mm beads than for 0.8 mm. So mixing for larger beads is faster and more efficient than for small ones in the TVF regime. As reported in table 17, larger particles size leads to stronger initial decay rate:  $R_d$  is multiplied by a factor 6 compared to single-phase flow configuration. Moreover, it can be observed that mixing varies with the square of particle size.

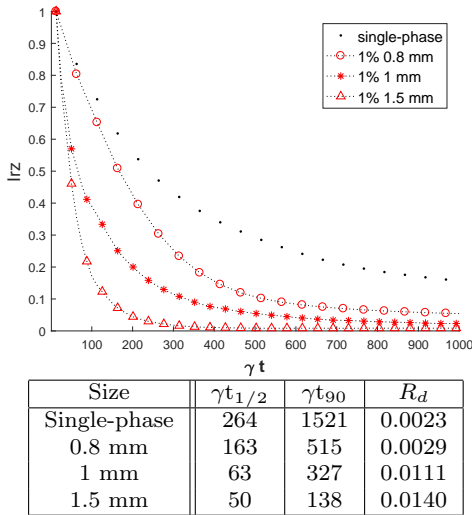


Fig. 17: Influence of the particle size on the intra-vortex mixing  $I_{rz}$  in TVF regime ( $Re=100$ ,  $\lambda = 2.25e$ ) for particle concentration of 1%. Mixing times and initial decay rate are reported in the table.

#### *WVF regime*

Similar conclusions can be drawn in WVF, as illustrated in Fig. 18. Intra-vortex mixing with larger beads is more efficient in the WVF regime due to enhancement of fluid flow fluctuations. In this dilute regime (concentration equal to 2%), getting homogeneous tracer distribution is typically 3 times faster than for single-phase WVF regime.

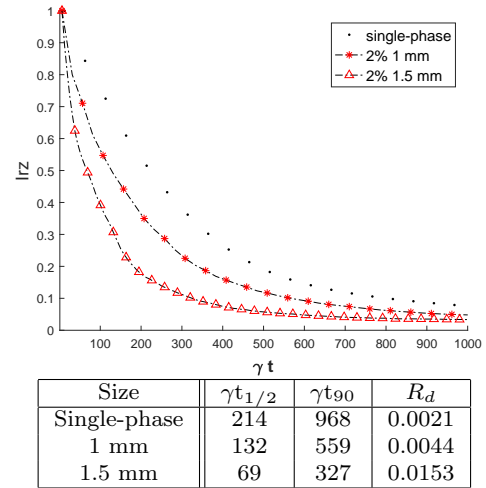


Fig. 18: Influence of the particle size on the intra-vortex mixing  $I_{rz}$  in WVF regime ( $Re=600$ ,  $\lambda = 2e$ ) for particle concentration of 2%. Mixing times and initial decay rate are reported in the table.

## 4 Conclusion

We have carried out an experimental characterization of tracer mixing in the Taylor-Couette flow configuration. More specifically, we have measured the enhancement of mixing efficiency by solid particles with various sizes and volume concentrations. Particles are neutrally buoyant and the size ratio of the particle diameter to the gap between cylinders ranges from 0.073 to 0.14. A specific attention has been paid to the Planar Laser-Induced Fluorescence (PLIF) measurements due to the presence of particles. Both density and refractive indexes of particles were matched to fluid properties. The presence of beads in the flow requires to use two PLIF channels and the unsteady deformation of the vortices for WVF is measured by PIV (allowing detection the vortex boundaries for the determination of intravortex mixing). Systematic analysis and error quantification of the successive steps of image processing have been thoroughly discussed. We have shown that the determination of mixing times is robust over the range of physical parameters we investigated.

With this method, the effect of dilute (1-2%) and moderately concentrated (4-8%) suspensions is compared through mixing indicators in the Taylor Vortex Flow and Wavy Vortex Flow regimes. The conclusion drawn from the experimental results is a clear and systematic enhancement of mixing under two-phase flow conditions. Both the particle size and concentration promote mixing during the early stages following dye

injection, and on the long time behavior towards homogeneous spatial distribution of tracer. Due to the finite size of particles interacting with the flow, yielding shear-induced hydrodynamic interactions and collisions, mixing is significantly enhanced in dilute suspensions compared to the single-phase flow. This is further enhanced by large particles. These observations regarding mixing in two-phase Taylor-Couette flows are consistent with the microscale mechanisms evidenced by Souzy et al. [15]. While particles are crossing the fluid streamlines, they drag fluid and participate to stretching and folding of tracer concentration spatial gradients. The effect observed when the suspension concentration is increased is also an evidence of collective effects.

## Acknowledgement

The authors would like to thank CEA for financial support and the technical support of Moise Marchal (IMFT) and Hervé Roussel (CEA).

## Nomenclature

### Variables

$A$	Area of pixels with value 1	(-)
$C$	Concentration	(-)
$\bar{C}$	Mean concentration	(-)
$e$	Gap width	m
$H$	Height	m
$I$	Segregation index	u.a.
$m$	Azimuthal wavenumber	(-)
$n$	Refraction index	(-)
$R_d$	Initial decay rate	(-)
$Re$	Stator radius	m
$Ri$	Rotor radius	m
$Re_\Omega$	Reynolds number	(-)
$r$	Radial coordinate	m
$Tc$	Rotational period	s
$t_{1/2}, t_{90}, t_{99}$	Mixing times	s
$\Gamma = H/e$	Aspect ratio	(-)
$\gamma$	Mean shear rate	$s^{-1}$
$\lambda$	Axial wavelength	(-)
$\nu$	Kinematic viscosity	$m^2 \cdot s^{-1}$
$\Omega$	Rotation rate	$rad \cdot s^{-1}$
$\rho$	Density	$kg \cdot m^{-3}$
$\sigma$	Standard deviation	(-)
$\sigma^2$	Variance	(-)

## Abbreviations

DMSO	Dimethyl-sulfoxyde
KSCN	Thiocyanate of potassium
PIV	Particle image velocimetry
PLIF	Planar laser-induced fluorescence
sCMOS	Camera (Scientific complementary metal oxide semi-conductor)
SVF	Spiral vortex flow
TVF	Taylor vortex flow
WVF	Wavy vortex flow

## Subscripts

$c$	critical
$i$	relative to the rotor
$e$	relative to the stator
$0$	relative to the origin value
$rz$	in the vertical visualization plane

## References

1. M.W. Davis and E.J. Weber. Liquid-liquid extraction between rotating concentric cylinders. *Industrial and Engineering Chemistry*, 52:929–934, 1960.
2. J. Y. Lanoë. Performances d'une colonne d'extraction liquide-liquide miniature basée sur un écoulement de Taylor-Couette. *ATALANTE Conference*, 2002.
3. K. Kataoka, T. Hongo, and M. Fugatawa. Ideal plug-flow properties of Taylor-vortex flow. *Journal of Chemical Engineering Japan*, 8:472–476, 1975.
4. K. Kataoka, H. Doi, and T. Komai. Heat and mass transfer in Taylor-vortex flow with constant axial flow rate. *International Journal of Heat and Mass Transfer*, 57:472–476, 1977.
5. K. Kataoka and T. Takigawa. Intermixing over cell boundary between Taylor vortices. *AIChE Journal*, 27:504–508, 1981.
6. M. Nemri, E. Climent, S. Charton, J.Y. Lanoë, and Ode D. Experimental and numerical investigation on mixing and axial dispersion in Taylor-Couette flow patterns. *Chemical Engineering Research and Design*, 91:2346–2354, 2013.
7. R.J. Campero and R.D. Vigil. Axial dispersion during low Reynolds number Taylor-Couette flow: intra vortex mixing effect. *Chemical Engineering Journal*, 52:3305–3310, 1997.
8. G. Desmet, H. Verelst, and G.V. Baron. Local and global dispersion effect in Couette-Taylor flow - I.

- Description and modeling of the dispersion effects. *Chemical Engineering Journal*, 51:1287–1298, 1996.
9. G. Desmet, H. Verelst, and G.V. Baron. Local and global dispersion effect in Couette-Taylor flow - II. Quantative measurements and discussion of the reactor performance. *Chemical Engineering Journal*, 51(8):1299–1309, 1996.
  10. W.Y. Tam and H.L. Swinney. Mass transport in turbulent Taylor-Couette flow. *Physical Review A*, 36:1374–1381, 1987.
  11. M. Rudman. Mixing and particle dispersion in the wavy vortex regime of Taylor-Couette flow. *AIChE Journal*, 44(5):1015–1026, 1998.
  12. M. Nemri, S. Cazin, S. Charton, and E. Climent. Experimental investigation of mixing and axial dispersion in Taylor-Couette flow patterns. *Experiments in Fluids*, 55:1769, 2014.
  13. M. Nemri, S. Charton, and E. Climent. Mixing and axial dispersion in Taylor-Couette flows: the effect of the flow regime. *Chemical Engineering Science*, 139:109–124, 2016.
  14. B. Metzger, O. Rahli, and X. Yin. Heat transfer across sheared suspensions: role of the shear-induced diffusion. *Journal of Fluid Mechanics*, 724: 527—552, 2013.
  15. M. Souzy, H. Lhuissier, E. Villermaux, and B. Metzger. Stretching and mixing in sheared particulate suspensions. *Journal of Fluid Mechanics*, 812:611–635, 2017.
  16. D. Dherbécourt, S. Charton, F. Lamadie, S. Cazin, and E. Climent. Experimental study of enhanced mixing induced by particles in Taylor-Couette flows. *Chemical Engineering Research and Design*, 108:109–117, 2016.
  17. D. Coles. Transitions in circular Couette flow. *Journal of Fluid Mechanics*, 21:385–425, 1965.
  18. A. Esser and R. Grossmann. Analytic expression for Taylor-Couette stability boundary. *Physics of fluids*, 8:1814–1819, 1996.
  19. C. Dutcher and S.J. Muller. Spatio-temporal mode dynamics and higher order transitions in high aspect ratio newtonian Taylor-Couette flows. *Journal of Fluid Mechanics*, 641:85–113, 2009.
  20. D. Andereck, S.S. Liu, and H.L. Swinney. Flow regimes in a circular Couette system with independently rotating cylinders. *Journal of Fluid Mechanics*, 164:155–183, 1985.
  21. Jeffrey F. Morris Madhu V. Majji, Sanjoy Banerjee. Inertial flow transitions of a suspension in Taylor-Couette geometry. *Journal of Fluid Mechanics*, 835:936–969, 2018.
  22. R. Lindken and W. Merzkirch. A novel PIV technique for measurements in multiphase flows and its application to two-phase bubbly flows. *Experiments in Fluids*, 33(6):814–825, 2002.
  23. D. Dussol, P. Druault, B. Mallat, S. Delacroix, and G. Germain. Automatic dynamic mask extraction for piv images containing an unsteady interface, bubbles, and a moving structure. *Comptes Rendus Mécanique*, 344:464–478, 2016.
  24. Fabrice Lemoine Matthias Bruchhausen, Fabrice Guillard. Instantaneous measurement of two-dimensional temperature distributions by means of two-color planar laser induced fluorescence (PLIF). *Experiments in Fluids*, 38(1):123–131, 2005.
  25. Veronique Roig Frederic Risso Emmanuella Bouche, Sebastien Cazin. Mixing in a swarm of bubbles rising in a confined cell measured by mean of plif with two different dyes. *Experiments in Fluids*, pages 54–1952, 2013.
  26. J.M. Ottino. *The kinematics of mixing: Stretching, chaos and transport*. The press syndicate of the university of Cambridge, 1989.
  27. J. Dusting and S. Balabani. Mixing in Taylor-Couette reactor in the non wavy flow regime. *Chemical Engineering Science*, 64:3103–3111, 2009.
  28. J. Kittler J. Illingworth. A survey of the hough transform. *Computer vision, graphics and image processing*, 44:87–116, 1988.