



Development and experimental validation of TPS software to determine the dose outside the radiation beam

Igor Bessières, jean-marc bordy, Bénédicte Poumarède

► To cite this version:

Igor Bessières, jean-marc bordy, Bénédicte Poumarède. Development and experimental validation of TPS software to determine the dose outside the radiation beam. 11th Biennial Conference on Physics and Radiation Technology for Clinical Radiotherapy (ESTRO - 2011), May 2011, London, United Kingdom. Radiotherapy and oncology, Volume 99, Supplement 1, May 2011, Page S176, 99 (supplement 1), S176, poster 436, 2001, 10.1016/S0167-8140(11)70558-8 . cea-02558172

HAL Id: cea-02558172

<https://cea.hal.science/cea-02558172>

Submitted on 30 Apr 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Development and experimental validation of treatment planning system software to determine the whole-body dose in radiotherapy

BESSIERES Igor¹
BORDY Jean-Marc²
POUMAREDE Bénédicte³

¹CEA, LIST, DCSI, Laboratoire Modélisation, Simulation et Systèmes, F-91191 Gif-Sur-Yvette, France.

²CEA, LIST, LNHB, F-91191 Gif-Sur-Yvette, France.


³CEA, LIST, DCSI, F-91191 Gif-Sur-Yvette, France.

igor.bessieres@cea.fr

MOTIVATION

- In the fight against cancers, radiotherapy remains the most powerful and widespread technique.
- Risk of generating **second cancers and heart diseases** after a first treatment due to **x-rays leakages** and **scattered radiations** that depose **out-of-field dose**¹.
- At the moment, TPS optimize the effectiveness of radiation therapy, based on dose distributions in the target volume, but the dose distributions to distant organs are not provided.
- It could help the therapist to **know the peripheral dose** before the treatment in order to predict and **reduce the iatrogenic effects**.

Our solution: **develop a Monte Carlo tool giving the whole-body dose in a reasonable time**.
 The peripheral dose is low and consequently difficult to simulate with a small statistical uncertainty.

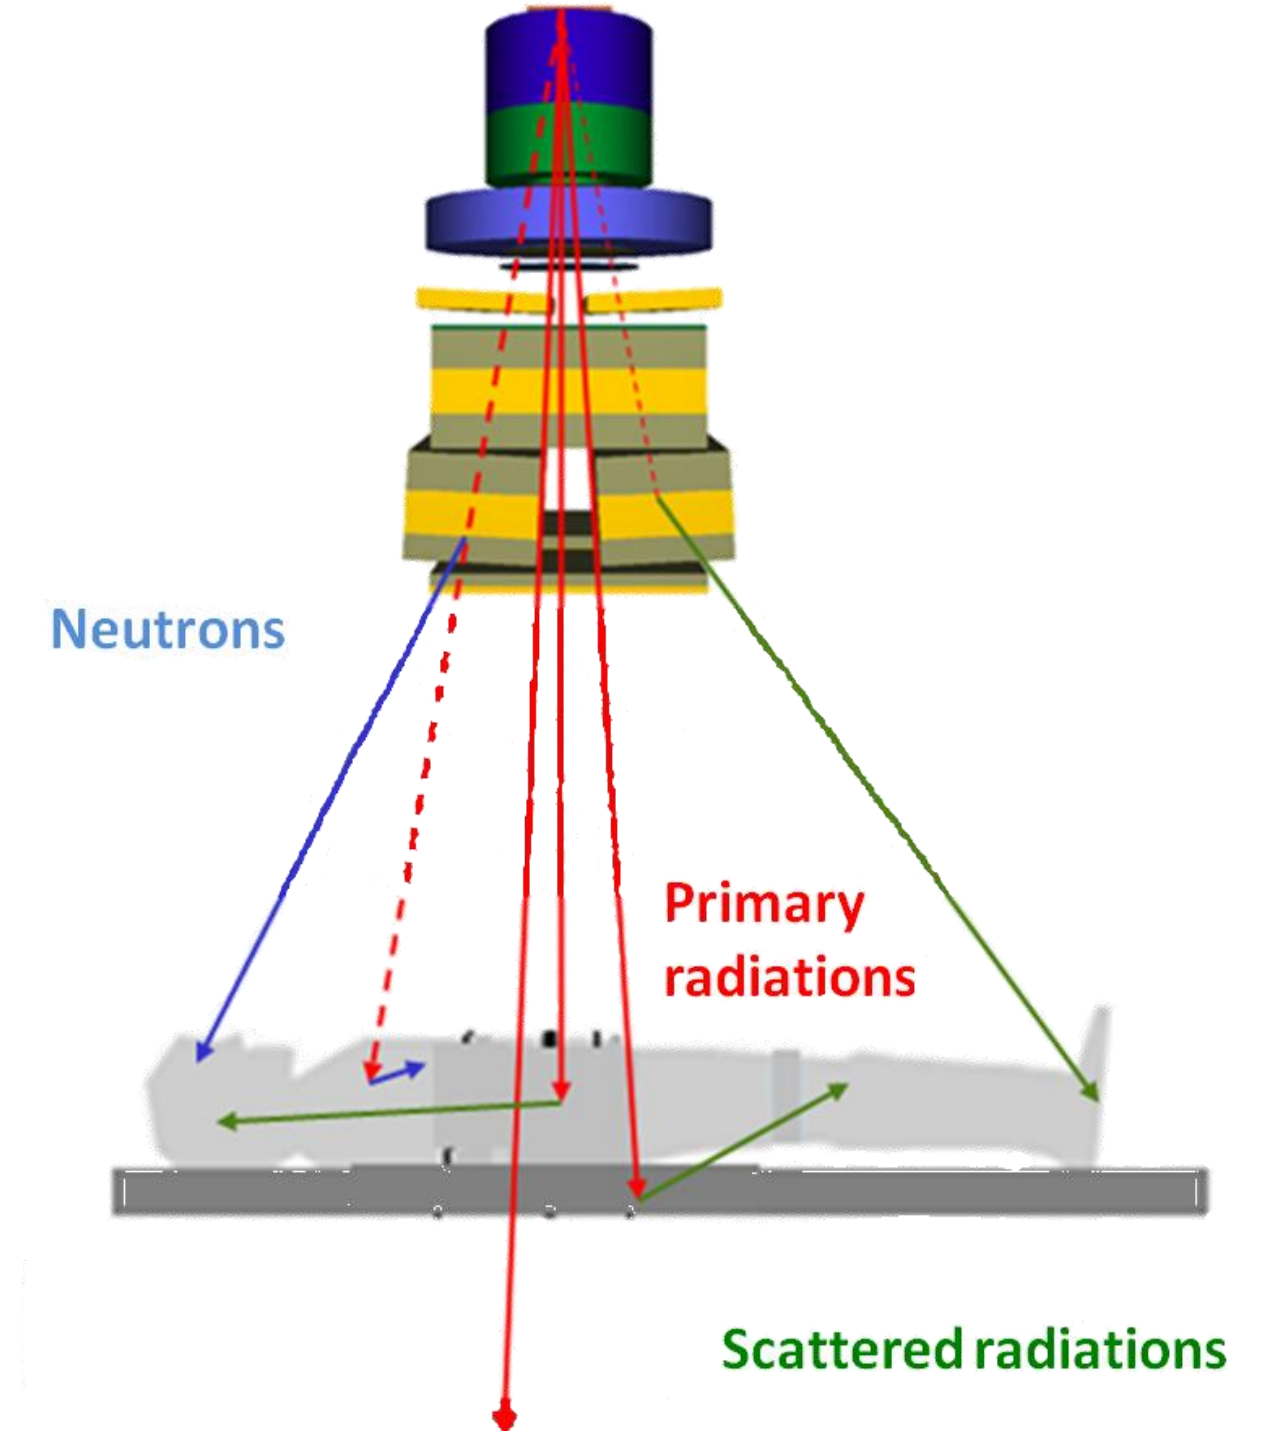

MATERIAL and METHODS

Code:


- Tool based on the *Penelope*² Monte Carlo particle transport code, high accuracy on the dose deposition.
- Calculation of the dose at any part of the patient's body while carrying out treatment planning.
- Implementation of variance reduction techniques to improve the efficiency: better uncertainty for the same simulation time.



Experimental validation:

On the GE *Saturne 43* conventionnal linac on a specific large water tank at 6, 12 and 20 MV with a 10 × 10 cm² field at the French Primary Standard Laboratory (done) and an IMRT accelerator on an anthropomorphic phantom (autumn 2011).

Use of the OSL (Optically Stimulated Luminescence) dosimeters: *Nanodot* from *LCIE Landauer*.

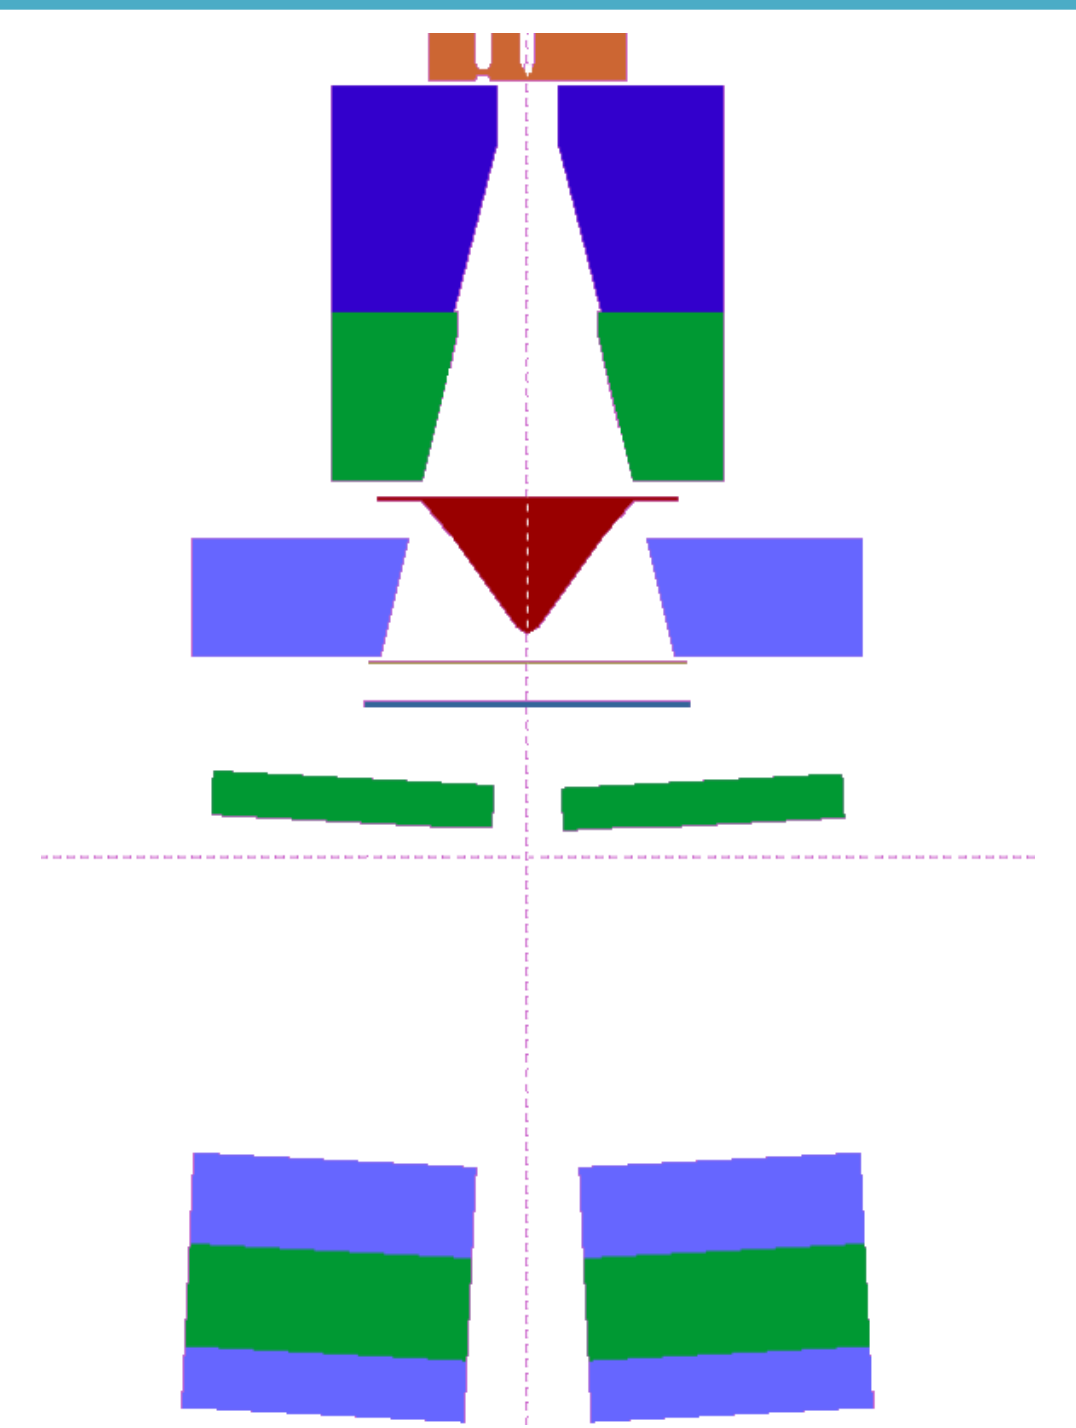

RESULTS


Measurements and calculations on the *Saturne 43*:

Considering that the ionization chamber dose is the reference value, **OSL over-estimate the dose** at large distance from the beam centre. It is due to the energy dependence of the dosimeter's response at low energies.

The *Penelope* code fits better (mean error 3 %) with the reference than the *MCNPX* code (mean error 30 %).


But *Penelope* is too slow and time consuming for a clinical application (26 hours on 108 processors to calculate the dose in the water tank).

Consequently, we need to **accelerate the calculation** by implementing the Dxtran variance reduction technique.

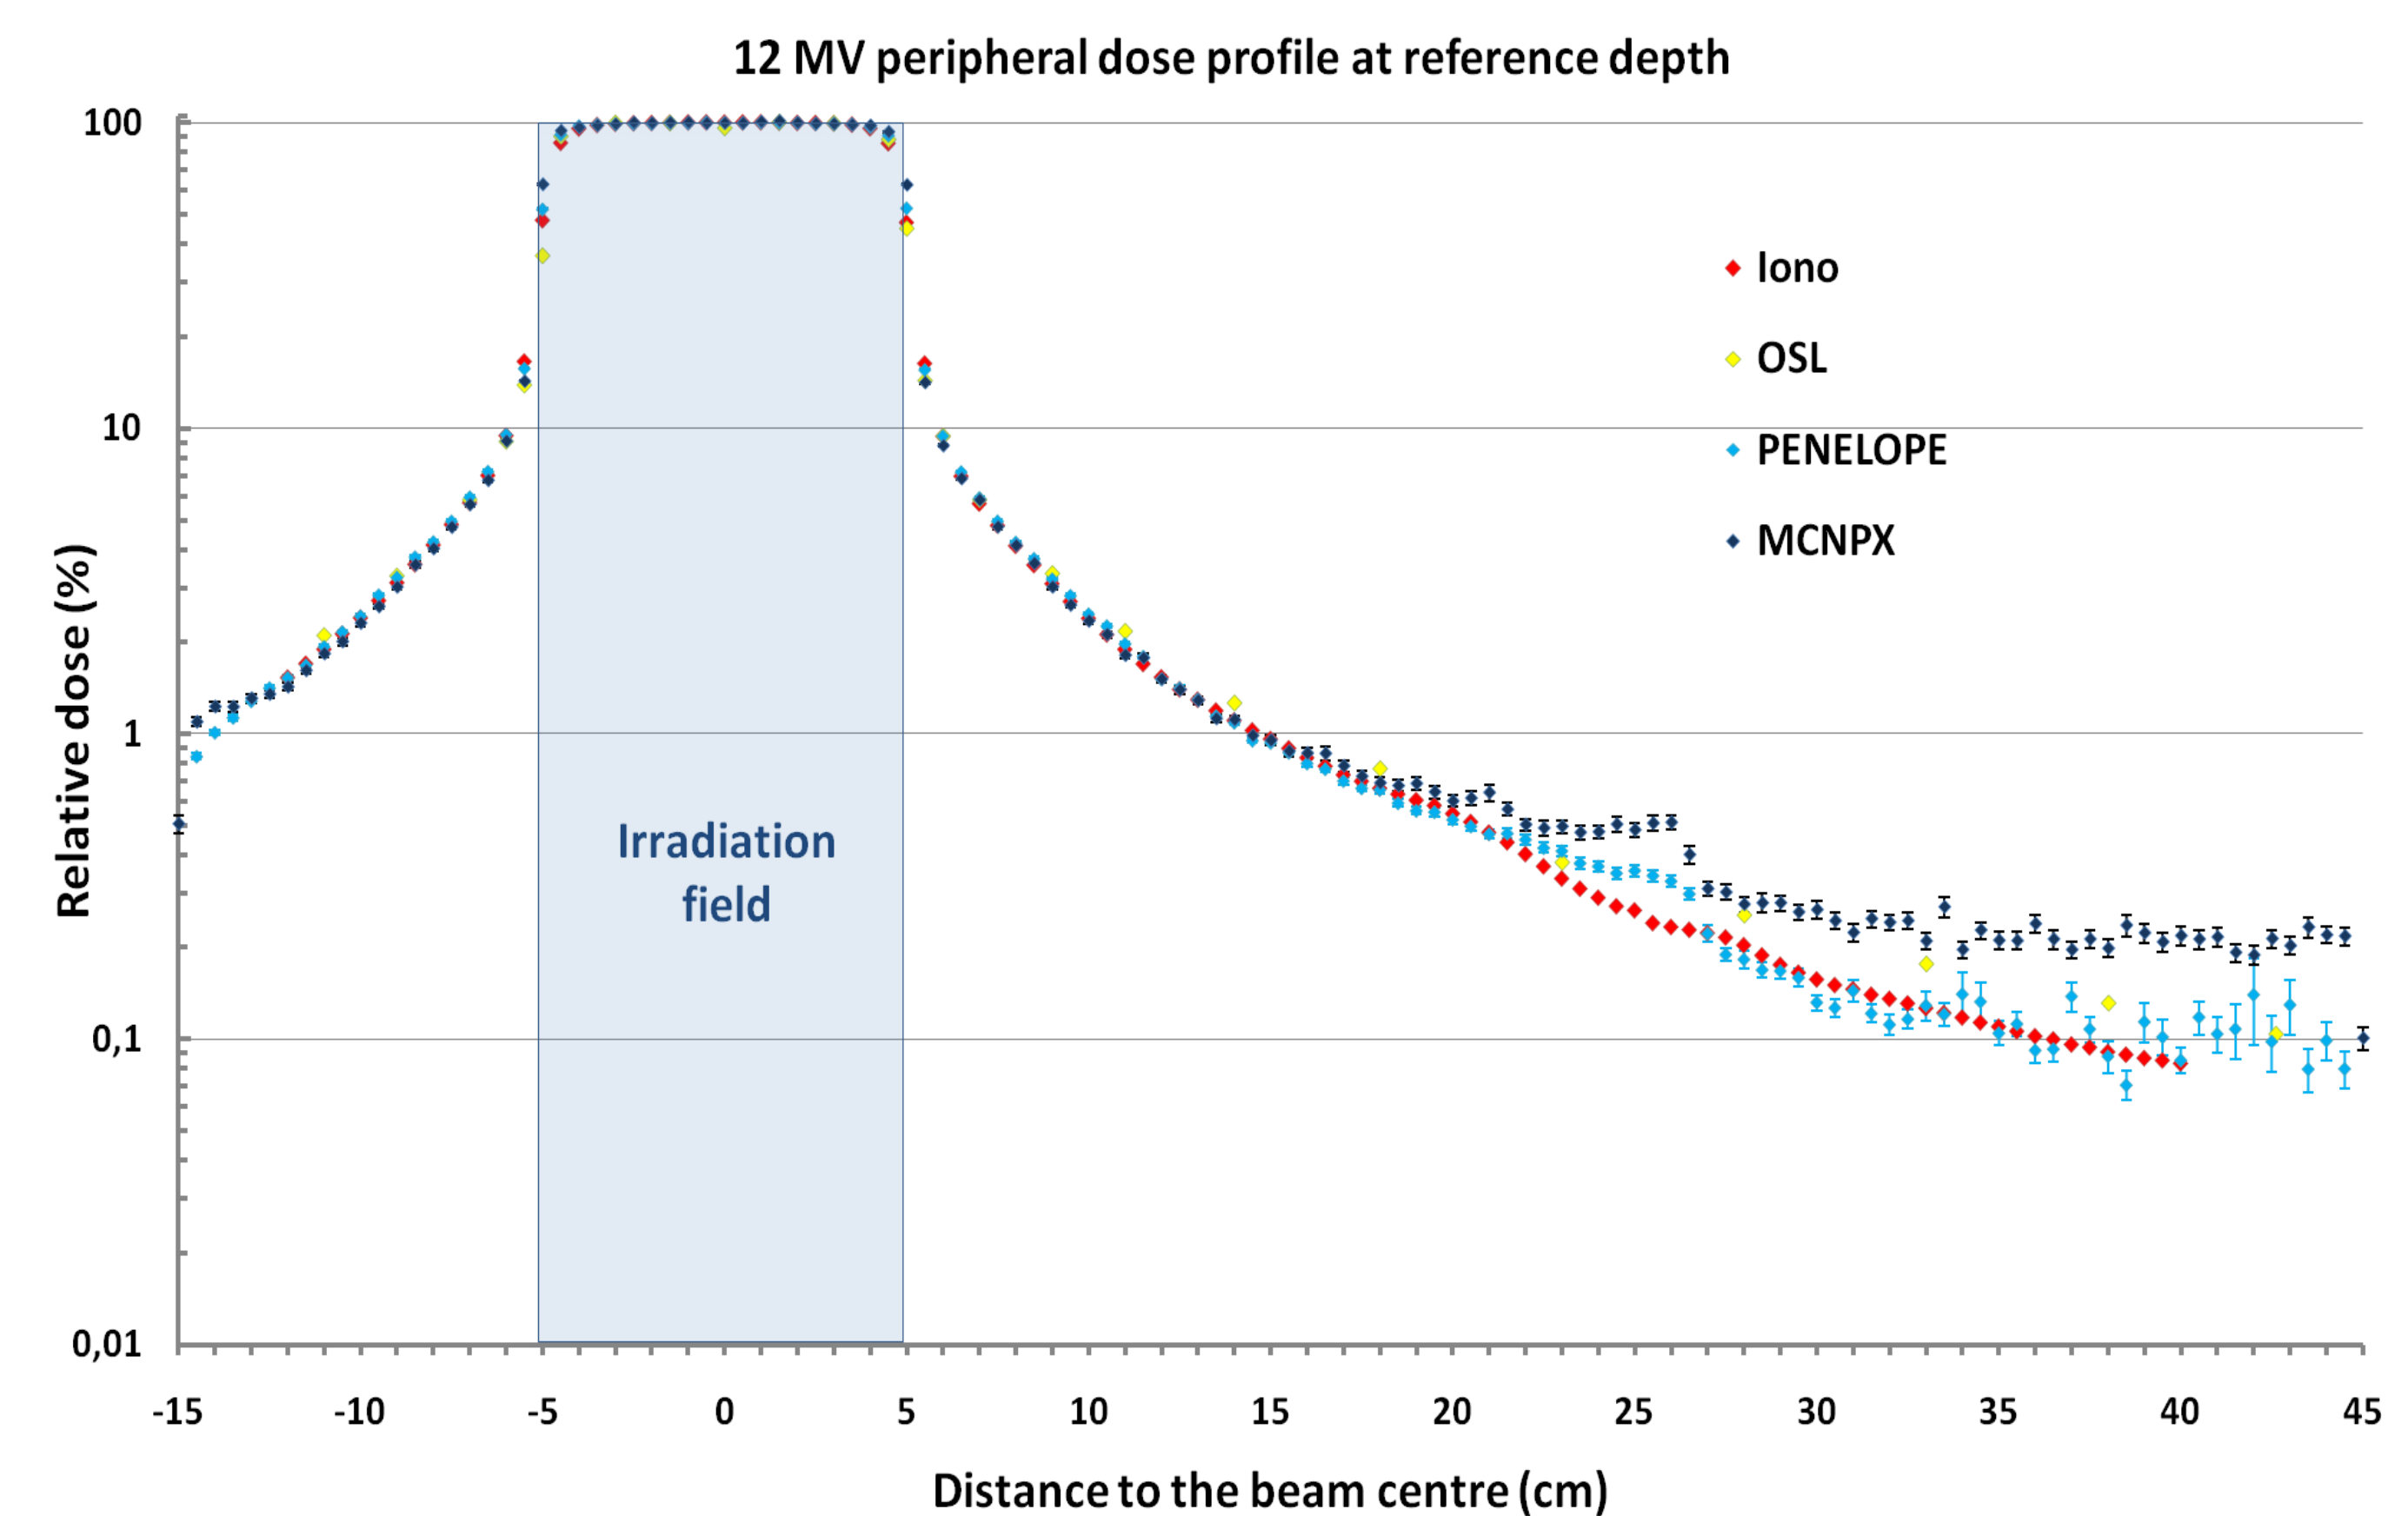


OSL energy dependence correction:

High over-response below 100 keV.

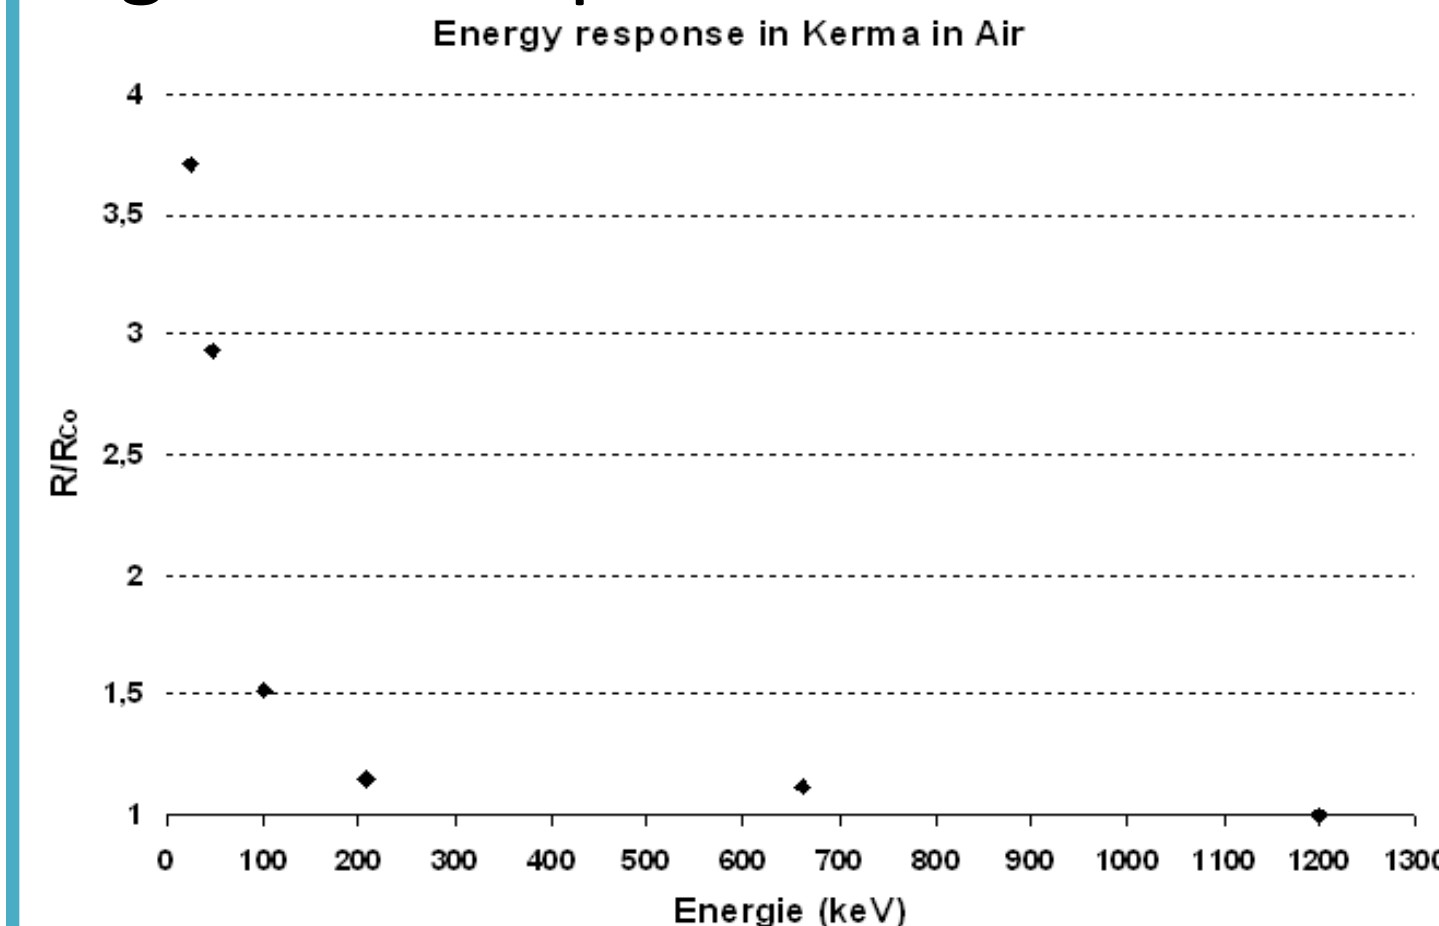

Importance of low energy photons far from the field (*Penelope* calculations).

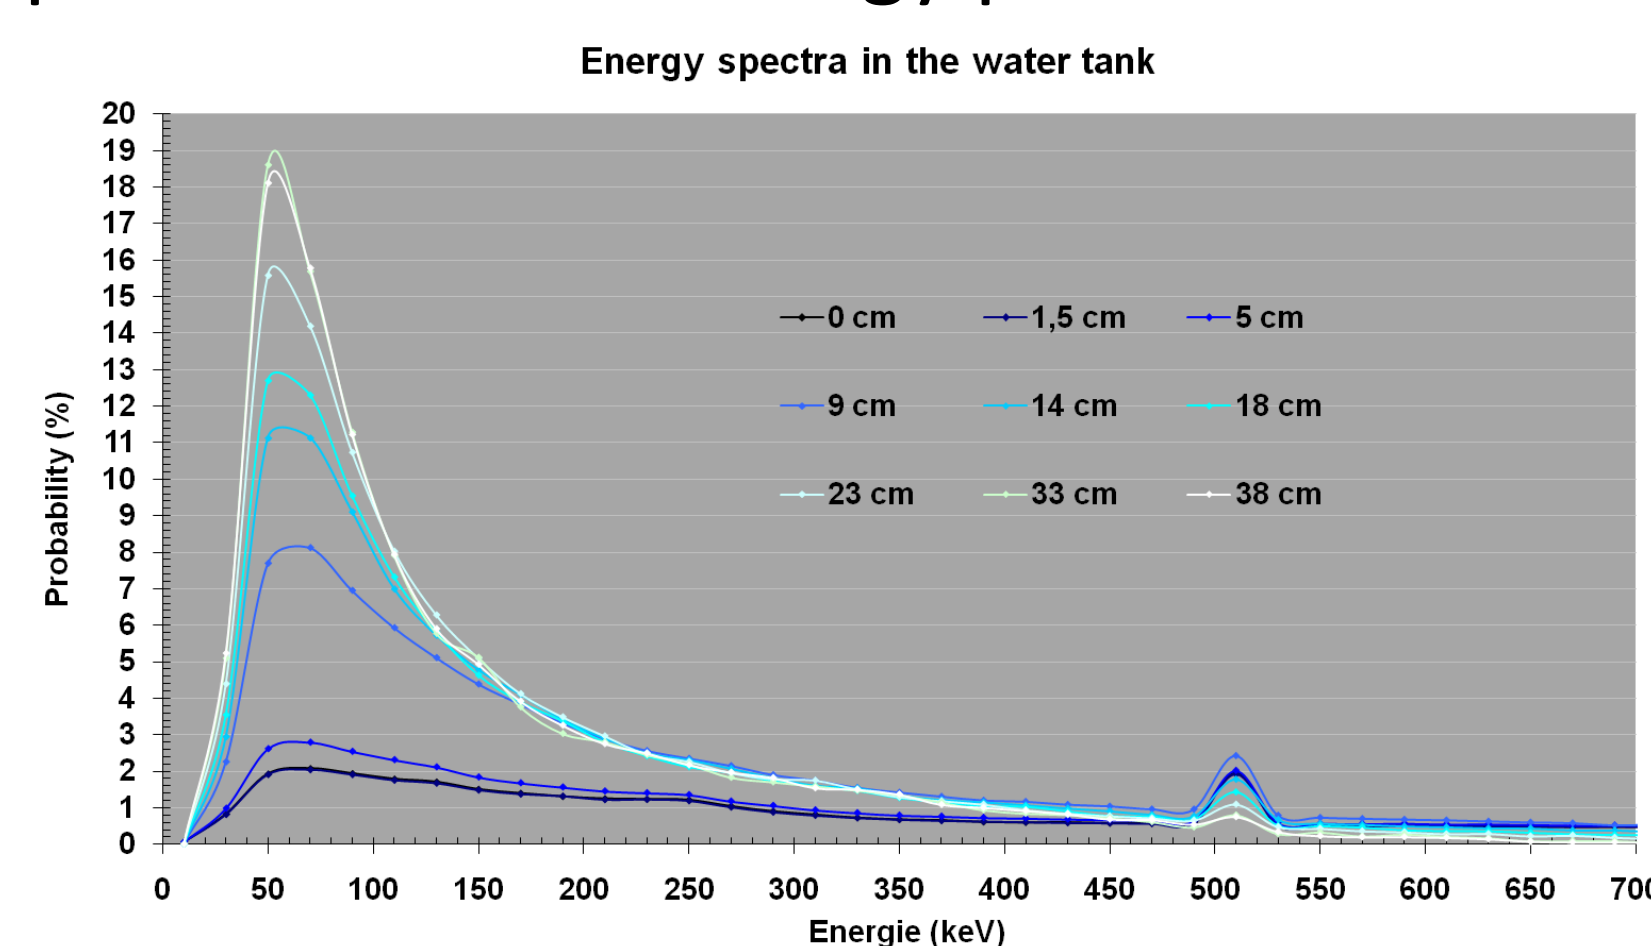


After correcting the energy dependence, the OSL dosimeters will give satisfying results so that they could be used to validate the code in a real IMRT configuration.

OUTLOOK

- Implementation of the pseudo deterministic transport variance reduction technique in *Penelope* (in progress).

Subdivision of particle at each interaction: one is forced to reach a region of interest (virtual particle), the other one is the real one that follow its history (non deterministic transport).

- Measurements and validation on an anthropomorphic phantom with OSL detectors.

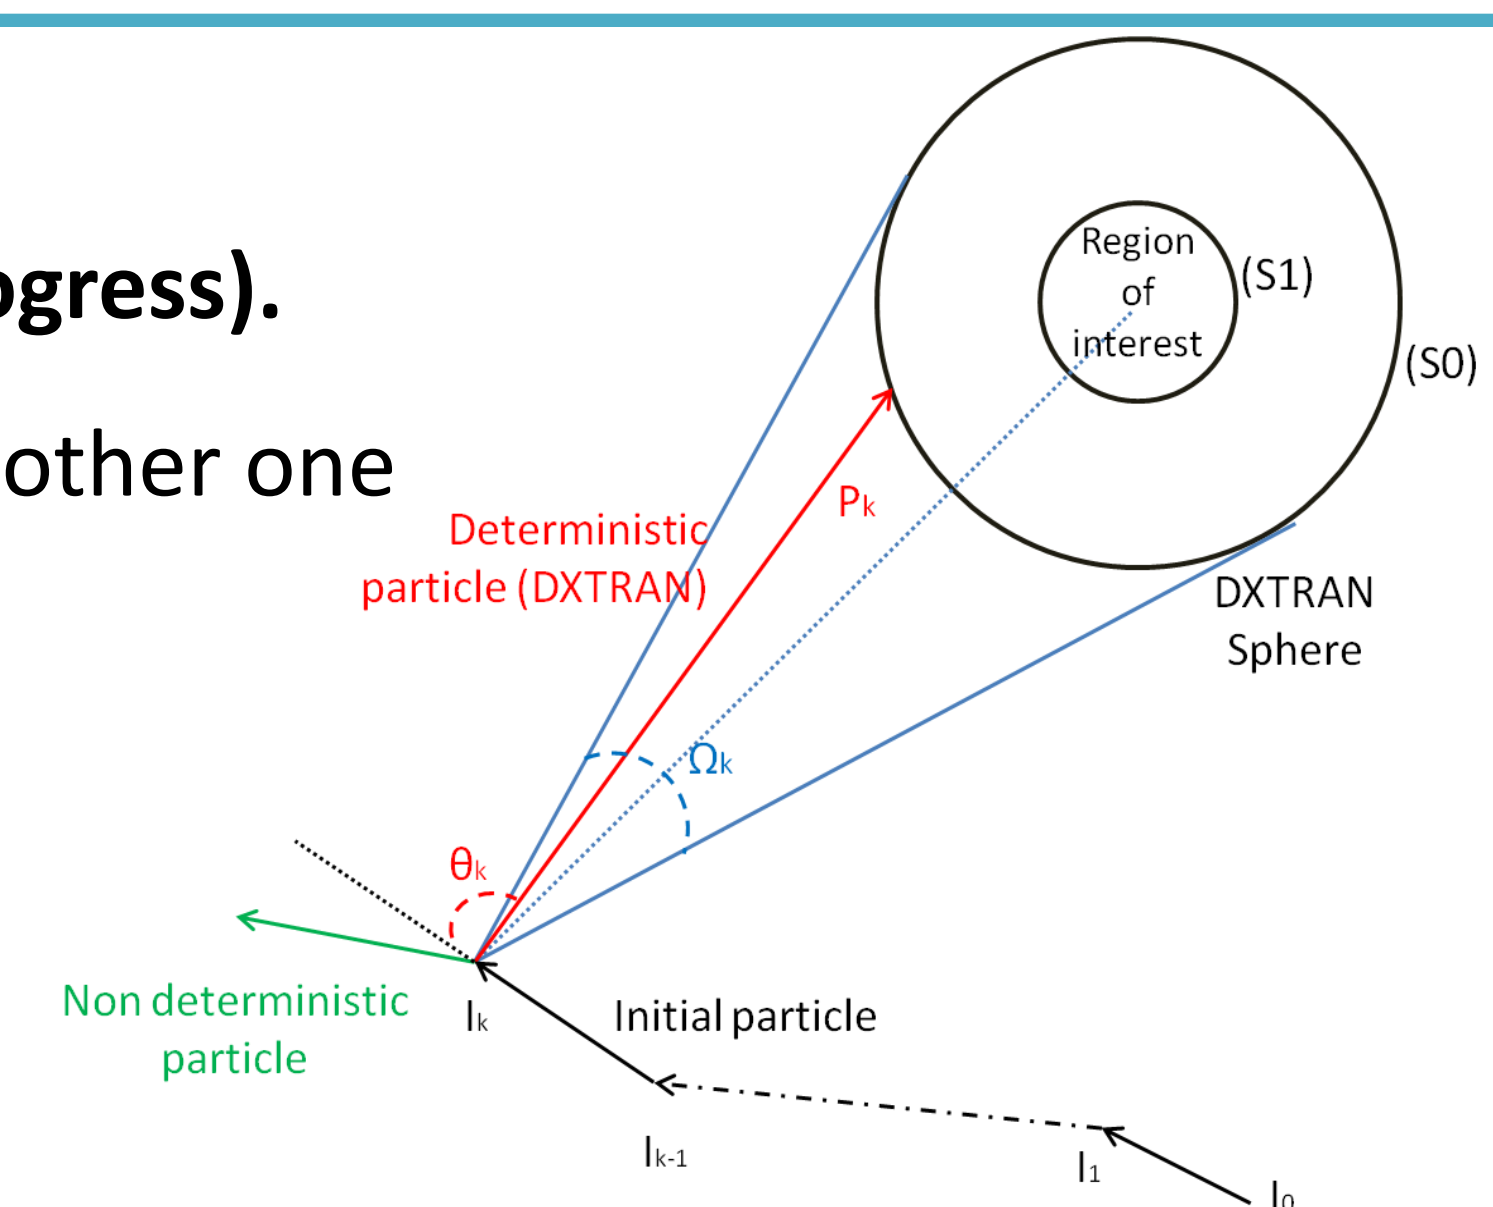

REFERENCES

1. Xu G X, Bednarz B & Paganetti H, 2008, A review of dosimetry studies on external-beam radiation treatment with respect to second cancer induction, *Phys. Med. Biol.* **53** 193-241.
2. Salvat F, Fernandez-Varea J-M, Acosta E & Sempau J, 2001, *PENELOPE - A Code System for Monte Carlo Simulation of Electron and Photon Transport*