



HAL
open science

Block-Structured Quad Meshing for Supersonic Flow Simulations

C Roche, F Ledoux, J Breil, T Hocquellet

► **To cite this version:**

C Roche, F Ledoux, J Breil, T Hocquellet. Block-Structured Quad Meshing for Supersonic Flow Simulations. SIAM International Meshing Roundtable Workshop 2023 (SIAM IMR 2023), Mar 2023, Amsterdam, Netherlands. 2023. cea-04028054

HAL Id: cea-04028054

<https://cea.hal.science/cea-04028054>

Submitted on 14 Mar 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Block-Structured Quad Meshing for Supersonic Flow Simulations

C. Roche^{1,3}, F. Ledoux^{2,3}, J. Breil¹, T. Hocquet¹¹CEA CESTA, Le Barp, France - ²CEA DIF, Bruyères-le-Châtel, France - ³LIHPC, CEA, Université Paris-Saclay

PROBLEM STATEMENT

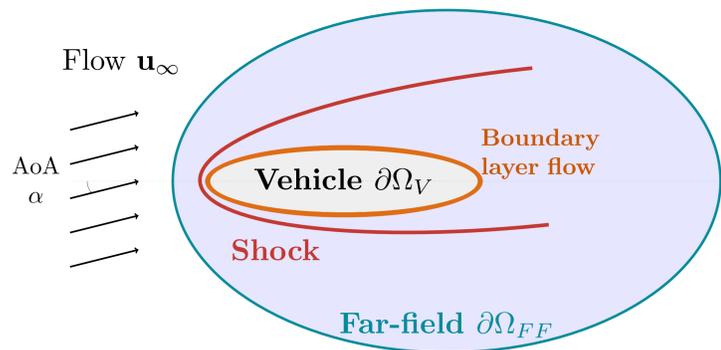


FIGURE 1 – Flow around a supersonic vehicle.

- ◆ This work aims to provide a solution to generate meshes automatically for a **legacy Computational Fluid Dynamics** code.
- ◆ Our meshing algorithm is freely available and implemented in the open-source C++ meshing framework **GMDS** [1].

Input meshes of the code

- ◆ **Block-structured** meshed
- ◆ **Quad** cells only

Hypothesis on domains

- ◆ Vehicles are **completely immersed** in the fluid
- ◆ Far-field is a **smooth boundary**
- ◆ **Single wall** vehicles

The main stages of our approach

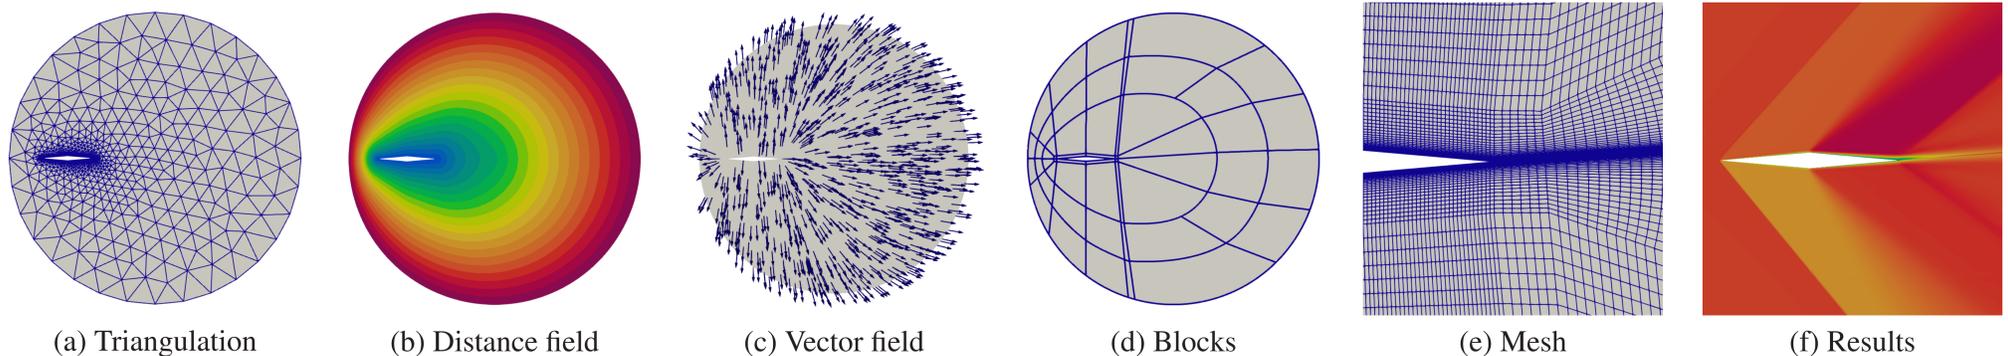


FIGURE 2 – Starting from a triangulation of the domain (a), we first generate and combine distance fields (b) and build a vector field that ensure wall orthogonality and the alignment with the angle of attack (c). Using those fields, we generate curved blocks (d) and a final quad mesh where the element size is carefully controlled in the boundary layer (e). Numerical simulation can then be launched (f).

Block layer generation

- ◆ Compute a **distance field** d (Fig. 2.b) by solving an Eikonal equation [2] on a first triangular mesh (Fig. 2.a).
- ◆ Compute a **vector field** \mathbf{v} (Fig. 2.c) to lead the blocks extrusion. This field is a combination of the distance field to the wall gradient, and a constant vector field corresponding to the angle of attack \mathbf{u}_∞ .
- Set the block corner on the wall, based on geometric criteria.
- For each block corner n_n^i of the layer n , we compute the ideal position of the next block corner n_{n+1}^i in the layer $n+1$. This is done using the advection of the position of the first block corner along the field \mathbf{v} .
- Solve the conflicts due to **expansion** or **shrinking** on the layer [3] (Fig. 3).

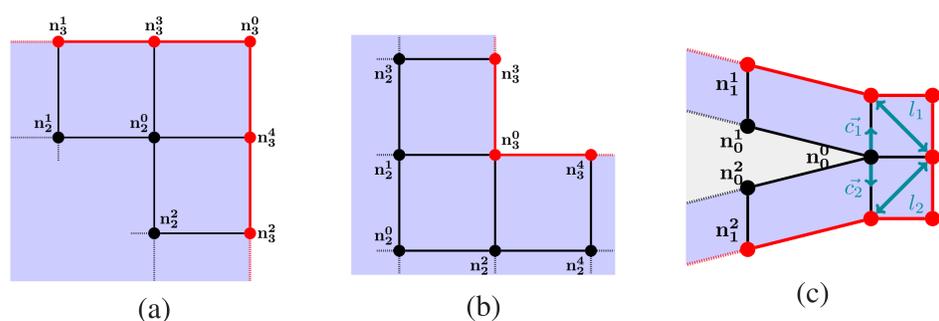


FIGURE 3 – Block simple insertion (a), double insertion (c) and shrinking (b) on a layer.

From blocks to quads

- Compute the number of mesh edges for each block edge by an **interval assignment** algorithm [4].
- Curve each block edge of the block with **quadratic Bézier curves** (Fig. 2.d).
- Apply a **transfinite** method to generate the mesh in each block (Fig. 2.e).
- Internal block **mesh smoothing** [5] for the blocks of the first layer.

Results and Applications

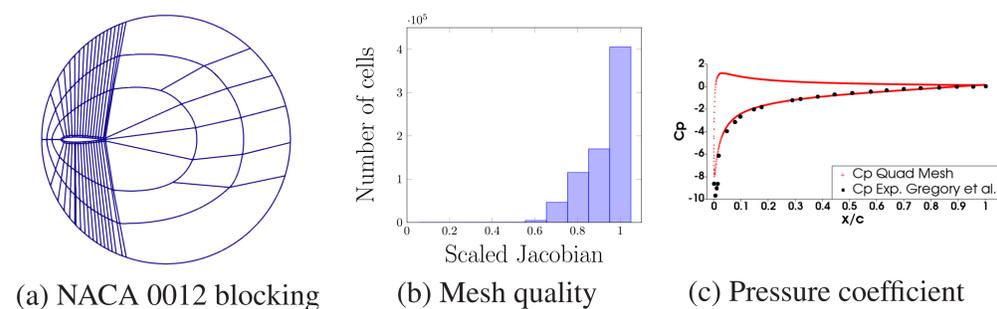


FIGURE 4 – Mesh validation with a CFD simulation around the NACA 0012 [6] airfoil. The angle of attack is $\alpha = 15^\circ$.

- Analysis of the flow alignment with \mathbf{u}_∞ (Fig. 4.a) and of the **mesh quality** (Fig. 4.b).
- Validation case on **experimental data-set** (Fig. 4.c) for the NACA 0012 airfoil. The simulations are performed with the open-source multi-physics CFD code SU2 [7].
- Validation case on a supersonic diamond airfoil (Fig. 2.f). The angles of the shocks fit with the analytical solution.

PERSPECTIVES

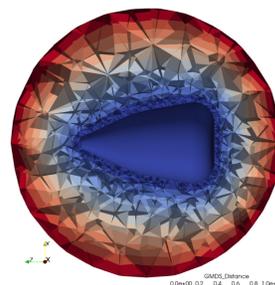


FIGURE 5 – 3D distance field.

This work proposes a solution to automatically generate 2D quadrilateral block-structured meshes dedicated to flow simulation around a single vehicle.

- ◆ Improve the mesh size transition.
- ◆ Improve the final mesh quality by block and final mesh smoothing.
- ◆ Extend the method to the 3D case.
- ◆ Switch to high order blocks.

[1] Gmsh. <https://github.com/LIHPC-Computational-Geometry/gmsh>.[2] Eloi Ruiz Gironés. *Automatic hexahedral meshing algorithms: from structured to unstructured meshes*. PhD thesis, Universitat Politècnica de Catalunya (UPC), 2011.[3] Ted D Blacker and Michael B Stephenson. Paving: A new approach to automated quadrilateral mesh generation. *International journal for numerical methods in engineering*, 32(4):811–847, 1991.

[4] S Mitchell. Incremental Interval Assignment by Integer Linear Algebra, proc. of the international meshing roundtable, October 2021.

[5] Claire Roche, Jérôme Breil, and Marina Olazabal. Mesh regularization of ablating hypersonic vehicles. In *proceedings of the 8th European Congress on Computational Methods in Applied Sciences and Engineering, ECCOMAS Congress 2022*. Springer, 2022. To be submitted.[6] Christopher Rumsey. 2DN00: 2D NACA 0012 Airfoil Validation Case. https://turbmodels.larc.nasa.gov/naca0012_val.html, 2021. [Online; accessed 5-August-2022].[7] Thomas D Economou, Francisco Palacios, Sean R Copeland, Trent W Lukaczyk, and Juan J Alonso. Su2: An open-source suite for multiphysics simulation and design. *AIAA Journal*, 54(3):828–846, 2016.