



**HAL**  
open science

## An online Toolkit for applications featuring collaborative robots across different domains

José F. Saenz, Jule Bessler-Etten, Marcello Valori, Gerdienke B. Prange-Lasonder, Irene Fassi, Catherine Bidard, Aske Bach Lassen, Imre Paniti, Andras Toth, Tobias Stuke, et al.

### ► To cite this version:

José F. Saenz, Jule Bessler-Etten, Marcello Valori, Gerdienke B. Prange-Lasonder, Irene Fassi, et al.. An online Toolkit for applications featuring collaborative robots across different domains. IEEE Transactions on Human-Machine Systems, 2022, 99, pp.1-11. 10.1109/THMS.2022.3213416 . cea-04086443

**HAL Id: cea-04086443**

**<https://cea.hal.science/cea-04086443>**

Submitted on 2 May 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

# An online Toolkit for applications featuring collaborative robots across different domains

J. Saenz, J. Bessler-Etten, M. Valori, G.B. Prange-Lasonder, I. Fassi, C. Bidard, A.B. Lassen, I. Paniti, A. Toth, T. Stuke, S. Wrede, and K. Nielsen

**Abstract**— Collaborative robots (cobots) are being applied in areas such as healthcare, rehabilitation, agriculture and logistics, beyond the typical manufacturing setting. This is leading to a marked increase in the number of cobot stakeholders with little or no experience in traditional safety engineering. Considering the importance of human safety in collaborative robotic applications, this is currently proving to be a barrier to more widespread cobot usage. A web-based Toolkit that targets cobot end-users and manufacturers with varying levels of safety expertise was developed, helping them to understand how to consider the safety of their cobot applications. In this work we will provide an overview of the state of the art for ensuring cobot safety, highlight the support provided by the “COVR Toolkit” and introduce three examples where third parties applied the Toolkit for their collaborative robotics application.

**Index Terms**—human-robot interaction, intelligent robots, occupational safety, robots, safety, standardization

## I. INTRODUCTION

Human-robot collaboration (HRC) represents a synergistic combination of collaborative robots (cobots) with humans, with a focus towards facilitating processes and supporting the humans in their work. Recent research activities [1] have led to many advances, particularly with respect to the integration of safety features in robot control systems and multi-modal interfaces for intuitive human-robot interaction. Recent statistics indicate that robots are being deployed for applications beyond manufacturing, including logistics, construction, inspection and maintenance, and even medical uses [2]. This larger scope of applications is serving to remove traditional boundaries between industrial and service robots, as discussed in [3], consequently broadening the HRC

concept beyond the industrial domain. Another current trend in robotics is the application of Artificial Intelligence (AI) and Machine Learning (ML) techniques for typical challenges such as perception in unstructured environments, behavioral adaptation, and improved interaction with humans. Taken together, there is an overall increase in the number of robotics stakeholders working on collaborative applications and who have little or no experience in safety engineering.

The flexibility of current robotics technologies means that the same robotic hardware can be used for a variety of applications, e.g. both in the industrial or in the healthcare domains. This “cross-domain” nature of robotics is a boon to robot manufacturers and users alike, but presents special challenges from the perspective of safety and standardization. International standards represent the state of the art and best practices. In the European Union, the application of harmonized standards, while voluntary, confer upon users the assumption of conformity to essential health and safety requirements. In an increasingly uncertain world, such assumption of conformity is a helpful way for manufacturers to ensure that their system is safe. Standards are currently organized according to specific domains. As an example, there are separate standards for industrial robots used in manufacturing and for robots used for healthcare and rehabilitation activities. Although it is now possible to use the same robotic hardware for different domains, they can be subject to different and not entirely synchronized requirements, based on the domain the robot is being used (e.g. using an exoskeleton in the factory or for rehabilitation purposes). This creates uncertainty for manufacturers and end-users alike.

Previous work [4][5] has addressed the challenge arising

---

This work has been carried out within the framework of the European Project COVR, receiving funding from the European Union’s Horizon 2020 research and innovation programme under grant agreement No. 779966. J. Saenz, J. Bessler-Etten and M. Valori are co-first authors.

\*José Saenz is with the Business Unit Robotic Systems, Fraunhofer IFF, 39106 Magdeburg, Germany (e-mail: [jose.saenz@iff.fraunhofer.de](mailto:jose.saenz@iff.fraunhofer.de)).

Jule Bessler-Etten is with Roessingh Research and Development, 7522 AH Enschede, Netherlands and with the Department of Biomedical Signals and Systems, University of Twente, 7522 NB Enschede, Netherlands (e-mail: [j.bessler@rrd.nl](mailto:j.bessler@rrd.nl)).

Marcello Valori is with the Institute of Intelligent Industrial Technologies and Systems for Advanced Manufacturing of the National Research Council of Italy (CNR STIIMA), 70124 Bari, Italy (email: [marcello.valori@stiima.cnr.it](mailto:marcello.valori@stiima.cnr.it)).

Gerdienke B. Prange-Lasonder is with with Roessingh Research and Development, 7522 AH Enschede, Netherlands and with the Department of Biomechanical Engineering, University of Twente, 7522 NB Enschede, Netherlands (e-mail: [g.prange@rrd.nl](mailto:g.prange@rrd.nl)).

Irene Fassi is with the Institute of Intelligent Industrial Technologies and Systems for Advanced Manufacturing of the National Research Council of Italy (CNR STIIMA), 20133 Milan, Italy (email: [irene.fassi@stiima.cnr.it](mailto:irene.fassi@stiima.cnr.it)).

Catherine Bidard is with the Université Paris-Saclay, CEA, List, 91120 Palaiseau, France (e-mail: [catherine.bidard@cea.fr](mailto:catherine.bidard@cea.fr)).

Aske Bach Lassen is with the Department of Robot Technology, Danish Technological Institute, 5230 Odense, Denmark (e-mail: [aala@teknologisk.dk](mailto:aala@teknologisk.dk)).

Imre Paniti is with ELKH SZTAKI, Centre of Excellence in Production Informatics and Control, 1111 Budapest, HUNGARY (e-mail: [imre.paniti@sztaki.hu](mailto:imre.paniti@sztaki.hu)).

Andras Toth is with DARPAMotion Ltd., 1039 Budapest, and with the Department of Manufacturing Science and Engineering, Faculty of Mechanical Engineering, Budapest University of Technology and Economics, 1111 Budapest Hungary (e-mail: [toth.andras.gabor@gpk.bme.hu](mailto:toth.andras.gabor@gpk.bme.hu)).

Tobias Stuke is with the Weidmüller Interface GmbH & Co. KG, 32756 Detmold, Germany (e-mail: [Tobias.Stuke@weidmueller.com](mailto:Tobias.Stuke@weidmueller.com)).

Sebastian Wrede is with the Research Institute for Cognition and Robotics, University of Bielefeld, 33615 Bielefeld, Germany (e-mail: [sebastian.wrede@uni-bielefeld.de](mailto:sebastian.wrede@uni-bielefeld.de)).

Kurt Nielsen is with the Department of Robot Technology, Danish Technological Institute, 5230 Odense, Denmark (e-mail: [kuni@teknologisk.dk](mailto:kuni@teknologisk.dk)).

The COVR Toolkit is available at [www.safearoundrobots.com](http://www.safearoundrobots.com).

THMS-0386

due to the cross-domain nature of cobots through the introduction of the concept of safety skills. This term has recently been refined - and referred to as “safety-relevant human-robot collaboration skills, HRC skills” - in the development of a CEN Workshop Agreement [6]. It is defined as an abstract representation of the ability of an HRC application to reduce a risk, irrespective of the implementation. It builds on the idea that mechanical hazards can be similar and independent of the domain of the application, and is supported to a certain extent by current cross-references between standards from different domains (e.g. the ISO/TR 23482-1 [7], which relates to service robots, references the ISO/TS 15066 [8], which is specific for industrial robots). This approach is particularly useful when considering how to execute a system level validation measurement (SLVM) of an HRC application. The how-to guides for executing SLVM are known as system level validation protocols, hereafter referred to as “protocols”.

The main contribution of this paper is to describe the COVR Toolkit that supports various cobot stakeholders in understanding and validating the safety of their application. The paper provides examples from three COVR Awards on how they used the Toolkit and reports on feedback for improvements that were suggested by Toolkit users. This paper is structured as follows. We begin with an overview on the state of the art for ensuring safety of HRC applications and a description of a specific lifecycle model for the design and implementation of HRC applications as the motivation for the Toolkit. This will be followed by a description of the Toolkit as a freely available website to support robotics stakeholders across all their life cycle activities. Then we introduce three exemplary COVR Award projects, highlight their use of the Toolkit and feedback they provided. The paper will end with an outlook on future developments of the Toolkit including COVR Hubs as a means for community-building beyond the end of the project.

## II. STATE OF THE ART

### A. *Essential health and safety requirements for human-robot interaction*

Within the European Union, the EC Machinery Directive MD/2006/42 specifies the essential health and safety requirements for all machines (including collaborative robots for all domains such as manufacturing, healthcare or rehabilitation) introduced to the market. This directive also explains the requirements for achieving self-conformity (via the CE mark [9]) and references harmonized standards for further guidance about the essential health and safety. While conformity to these harmonized standards is not compulsory, their application does offer manufacturers a high degree of certainty that their systems are safe and in the event of an accident, puts the burden of proof or negligence misdeed on the regulatory body and not the manufacturer. Given this situation, robotics system integrators and manufacturers often choose this path and conform with harmonized standards.

Additionally, the EU regulation 2017/745 (European Parliament and Council of the European Union, 2017), also known as the Medical Device Regulation (MDR) [10] needs to

be observed by robots used in healthcare and rehabilitation. The MDR emphasizes safety and performance across the lifetime of the application.

The challenges arising due to the transversal nature of robots with respect to domains have been discussed in [11]. In particular, it is not always clear for manufacturers or end-users which standards are applicable to their systems or how to deal with conflicting recommendations from different standards.

Previous research has addressed the challenge of considering safety in HRC applications through the use of model-based approaches, either in combination with automated techniques for identifying risks and considering erroneous human behavior [12] or in combination with traditional fault-tree analysis [13]. An extensive list of guidelines for prevention of mechanical hazards for HRC applications in the industrial domain are developed in [14]. Such approaches have proven to be useful in reducing the overall number of mechanical hazards in specific applications, but are still limited to the industrial domain.

In the healthcare domain, researchers have used musculoskeletal modeling [15] and numerical simulations [16] as a means to identify loads on joints and other structures to assess the effects of specific device designs [17] and assess risks associated with incorrect alignment or an incorrectly implemented limitations to the ranges of motion [18][19]. These simulation-based approaches all suffer from uncertainties regarding the validity of model behavior, due to underlying assumptions regarding, for example, human joint mechanics or tissue characteristics.

The agricultural domain is affected by the increasing introduction of robotics and automation, aimed at increasing productivity through automated execution of operations such as harvesting, weeding, and pruning [20]. However, the so-called “Agriculture 4.0” revolution is still far from its full implementation [21]. Nevertheless, agricultural robotics is widely addressed by the scientific literature of the last decades, with human-robot collaboration representing one emerging topic: in [22], HRC safety and ergonomics issues are extensively discussed from the perspective of the agricultural domain; in [23], issues deriving from farm workspace sharing are analyzed, proposing guidelines for HRC strategies; [24] reports a detailed review of cooperative robotics in agriculture including a comprehensive summary of HRC-related studies.

The authors believe that one way to support the robotics community in evaluating the safety of HRC applications is to provide detailed instructions on how to measure the efficacy of implemented safety measures. This is a trend increasingly seen in recent standardization activities. As an example, the recent final draft international standard (FDIS) version of the ISO/FDIS 10218-2 [24], published in 2021 and currently in evaluation, has added information to guide users through the process of executing a validation measurement for when the operating mode power and force limiting (PFL) is used. Other standards which also define testing procedures include the ISO/TR 23482-1, the ISO 3691-4 [25], and the ISO 18646 series. The ISO/TR 23482-1 specifies test methods to verify compliance to the requirements of 13482, and is applicable to

personal care robots. The ISO 3691-4 is intended to be used for driverless industrial trucks and automatically guided vehicles. It defines procedures to test the stability of the vehicle, as well as for human detection. Guidance for measuring rated speeds and stopping characteristics is provided by the ISO 18646-1 [26]. Additionally, the ISO 18646-2 [27] specifies methods to evaluate obstacle detection and obstacle avoidance functionalities. Navigating which standards apply for which applications can be challenging for novice robotics stakeholders, especially in situations where the same robotic hardware is used in multiple domains. Concerning medical robotics, specific standards have to be considered, even concerning the risk assessment: while ISO 12100 [28] is the Type A reference standard for the safety of machinery and describes the related risk assessment process, ISO 14971 [29] introduces the concept of benefit-risk analysis and provides instructions for the risk management process, which are both crucial for all the medical products. The standards from the IEC 60601 series address the different categories of medical electrical equipment. IEC 60601-1 [30] reports the main safety and performance requirements, which are complemented and, eventually, replaced, by more specific standards of the series. Particularly for robotic devices, IEC 80601-2-77 [31] addresses robotically assisted surgical equipment (RASE), while IEC 80601-2-78 [32] focusses on medical robots for rehabilitation, assessment, compensation or alleviation.

### B. Life cycle model for HRC applications

For the development and deployment of HRC applications, six particular life cycle phases can be identified. Their relation to the generic life cycle model is shown in Fig. 1. This six-phase model served as the basis for the development of the COVR Toolkit, which aims to be the most comprehensive resource for supporting robot stakeholders in ensuring the safety of their HRC applications. In the following, we will describe these six phases in detail, highlighting stakeholder needs.

Generic Life Cycle Model (ISO / IEC / IEEE 15288:2015)				
Concept	Development	Production	Utilization Support	Retirement
Life Cycle Phases identified by COVR Stakeholders for collaborative robot applications				
Phase 1: Inspiration and technology scan	Phase 3: Design	Phase 4: Implementation	Phase 6: Operation	
Phase 2: Requirements specification		Phase 5: Verification/ validation		

**Fig. 1.** Generic life cycle model (gray) and corresponding life cycle phases for cobot application development as defined by COVR stakeholders

The first life cycle phase pertains to users seeking inspiration from available solutions, to identify the state of the art. In particular, stakeholders are interested in learning about the safety challenges and how they were handled. We expect the level of background knowledge to vary across stakeholders, so any offering should be simple enough for novices to understand, while also offering enough details that are of relevance for more expert users.

During the second life cycle phase “Requirements specifications”, stakeholders are interested in identifying which standards, regulations, or laws are applicable to their system. As in phase 1, we expect stakeholders to have varying levels of expertise and background knowledge, whereby here it would be more important to cater to those with a lower level of experience.

A typical task during the third life cycle phase, “Design” is the execution of a risk analysis. This is often carried out in correspondence to ISO 12100 [28] and includes the sub-tasks of identification of hazards, calculation of risk, and identification of risk reduction measures (RRM). Although the execution of risk analyses is common within industry, novel HRC applications feature additional hazards that can be confusing. We expect that stakeholders interested in support for execution for a risk analysis to have a wide variety of expertise, whereby a focus on novice users is preferable.

Phase 4 “Implementation” spans all activities prior to normal operation, such as commissioning and software testing. In the following phase, “Verification/validation”, a validation measurement is typically executed. This serves as proof that the implemented RRM are sufficient to meet safety requirements. Therefore, this phase should address the how-to aspect of such validation measurements.

During Phase 6 “Operation”, it is important to observe the system performance and adapt the risk assessment if necessary. Additionally, any change to the system also needs to be reviewed, to identify whether the risk analysis needs updating or if new validation measurements are necessary.

The Toolkit was developed to systematically address the safety related needs of stakeholders in all of the life cycle phases for the design and implementation of HRI applications. Further details on specific engineering tasks involved in each phase have been reported in [33]. To the best of the authors’ knowledge, there are no comparable online services or guides that systematically support coboteers along all these life cycle phases.


### C. Cross-domain safety skills approach

As previously mentioned, six HRC safety skills were identified through a top-down and bottom-up approach [4]. The top-down method analyzed existing standards to identify operating modes or methods for safeguarding HRC applications. The bottom-up approach defined a large range of HRC applications from a variety of domains and then identified possible risk mitigation methods for typical hazards. HRC safety skills are an abstract representation of the ability of an application to reduce a risk defined irrespective of the implementation and can be validated for specific applications at a system level. These skills are: maintain safe distance (MSD), maintain dynamic stability (DYS), limit physical interaction energy (LIE), limit range of movement (LRM), maintain proper alignment (MPA), and limit restraining energy (LRE). It is important to underline that these HRC safety skills are not meant to replace existing definitions or supersede available standards. They were designed to simplify system level safety validation and allow for the development of protocols that are

transversal with respect to robot application domains. An overview of the relationship between operating modes from existing standards and the six safety skills is reported in [5].

### III. THE COVR TOOLKIT AS A KNOWLEDGE BASE

The COVR Toolkit ([www.safearoundrobots.com](http://www.safearoundrobots.com)) is a web-accessible knowledge base (Fig. 2) for cobot stakeholders interested in safety of HRC applications [33]. The first version consisted of a simple database to identify applicable standards and regulations based on the robot type and application domain of an HRC application. It also featured a database of system level validation methods, which could be filtered according to their domain, safety skill involved, and type of robotic device.

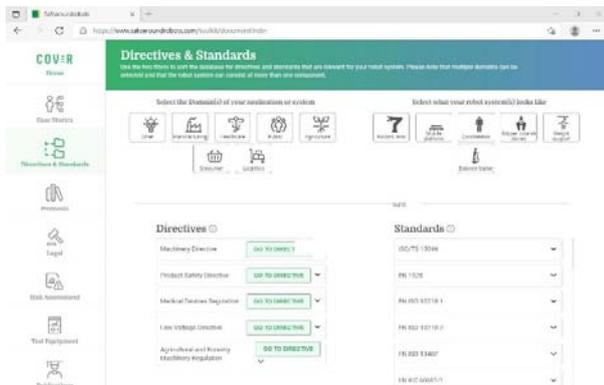

**Fig. 2.** Directives & Standards finder on the COVR Toolkit

From 2019-2021, the Toolkit was updated in yearly cycles to systematically address the needs of several stakeholders along the different life cycle phases. In the following, the various aspects of the Toolkit and their relation to the lifecycle phases from the previous section will be described.

#### A. Phase 1 support - Case Stories

Case stories in the Toolkit are meant to support coboteers during Phase 1 “Inspiration and technology scan” of the lifecycle for cobot development. The Toolkit currently features over 50 case stories. These downloadable pdf documents compactly describe challenges, solutions and lessons learned from the projects funded by the COVR consortium (COVR Awards). In order to create value for the target community, these case stories feature a high level of transparency regarding safety challenges and considerations. Although case stories are intentionally kept brief, they often link to other documents such as detailed project deliverables with experimental data or risk assessments. Case stories are intended to be understandable by people with a low level of HRC safety background knowledge, whereas the additional documents are targeted towards stakeholders with higher levels of expertise.

#### B. Phase 2 support - Directives and Standards

To support robotics stakeholders during Phase 2 activities, the Toolkit features the subsection “Directives and Standards”. It works as a filter to identify directives and standards relevant for a specific combination of operating domain and type of

robot components. The filter currently differentiates between combinations of six different types of cobot devices. The filters match the level of detail needed to differentiate between different directives and standards, and are intended to be nonetheless simple and understandable for novice robotics stakeholders.

#### C. Phase 3 and 4 support - Risk Assessment

It is necessary to conduct a risk assessment for all HRC applications, and there was genuine interest, especially among novice robotics stakeholders, in practical support with this activity. This work corresponds to Phase 3, and in the case of changes to an operating system, Phase 4 of the life cycle model. The Risk Assessment sub-section summarizes the individual steps for executing a risk assessment. It features a number of short explanatory videos describing typical hazards and mentioning possible corresponding risk mitigation methods.

While many companies have safety experts who are well versed in the execution of a risk assessment for typical machines, they often have less experience with HRC applications. This was the rationale behind the practical examples of typical hazards, as well as a downloadable risk assessment template. This sub-section was also designed for stakeholders with varying levels of background knowledge. Expert stakeholders will appreciate best practice examples, while non-experts are targeted through the videos and step-by-step explanations.

#### D. Phase 5 support - Protocols

Over thirty different step-by-step guides, called protocols, were specifically developed to explain how to execute SLVM for HRC applications based on the types of robot device and the applied HRC safety skill. The sub-section Protocols features a filtering tool similar to the Directives & Standards sub-section, to help users to find applicable protocols. In the case of protocols, there is no filter for domain (e.g. healthcare, manufacturing, or logistics), in contrast to the Directives & Standards sub-section, since protocols are meant to be valid across all domains. Any application-specific attributes that should be considered when executing an SLVM (e.g. specification of certain situations/environments) are identified within the protocols themselves. Protocols can be downloaded and used when planning and executing SLVM during Phase 5 of the life cycle model. To provide additional support to novice stakeholders, a number of online videos have been created and linked to the corresponding protocol.

#### E. General background information - Test Equipment, Publications, Legal Tool and FAQs

In addition to the Toolkit sub-sections that correspond directly to the life cycle model, there are four further features that provide useful background information for stakeholders. The sub-section “Test Equipment” contains a database of measurement equipment that is suitable for the execution of SLVM and is closely related to the protocols. Whereas protocols are by design measurement equipment agnostic, users have indicated that they would also appreciate support in finding suitable measuring equipment. The database can be

THMS-0386

filtered according to the specific physical dimension to be measured, such as pressure, distance, etc. The library is the result of market research, but should not be considered as an endorsement for any specific manufacturer. The sub-section also solicits Toolkit stakeholders to suggest new devices to be included in the database.

The “Publications” sub-section of the Toolkit lists over 90 different publications, that are relevant to cobot safety. The publications were initially curated by the COVR consortium based on their research and experience. External users can also submit suggestions for additions. This sub-section is targeted towards the academic community.

The most recent addition to the COVR Toolkit is the Legal Tool. It is designed to provide guidance to users on the legal and legislative aspects of cobots. It is strongly based on the output of the COVR Award “LEGARA”, which is white paper published by the law firm CO:Play [34]. The Legal Tool covers topics such as the European legislative landscape, CE marking, liability for accidents, and legal risk assessments. Interestingly it also explains the legal value of voluntary documents such as standards or protocols.

For stakeholders with a lower level of robotics expertise, the COVR Toolkit also features a frequently asked questions (FAQ) section. Here key terms and concepts are explained.

#### IV. COVR AWARD PROJECTS AND TOOLKIT USAGE

The COVR Project provided over 5 million Euros in funding to third parties (so-called COVR Awards) to act as beta testers of the Toolkit while developing their own cobot application. They were asked to use the Toolkit and protocols in order to identify gaps and errors, or to add their specific domain knowledge to the Toolkit. In total, 60 projects featuring 108 organizations from 14 European countries were funded. The organizations included 40 technology developers, 36 universities/research organizations, 14 end-users, 12 integrators, and 6 other types of organizations. While the majority of the COVR Awards were focused on the domains, of manufacturing, healthcare, rehabilitation, and logistics, there was a long tail of other projects, focusing on application areas such as recycling, professional services, agriculture, construction, and food service.

In this section, we will briefly present three COVR Awards, highlighting their usage and feedback to the Toolkit. In particular, by way of example, we report about projects that feature a collaborative robot for different domains of application (specifically industrial, agriculture, and rehabilitation). Table 1 summarizes the key attributes of the three projects, leading to the following observations:

- Similar robotic devices can be used in a variety of applications and domains with very different associated standards;
- Depending on the application and the domain, safety issues can be different and require specific strategies;
- The COVR Toolkit and, in particular, the “skill-based” transversal approach are appropriate to deal with the different issues and challenges.


TABLE I  
RELEVANT ATTRIBUTES OF THE PROJECTS DESCRIBED

PROJECT TITLE	DOMAIN	ROBOTIC DEVICE	MAIN CHALLENGE	SAFETY SKILL [4]
<b>COSMO</b>	Industrial	Collaborative manipulator	Risk assessment of reconfigurable work stations	Limit Impact Energy (LIE)
<b>HYDRO-COBOTICS</b>	Agriculture	Collaborative manipulator	Safe HRC in an indoor environment	Limit Impact Energy (LIE)
<b>DOROTHY</b>	Rehabilitation	Collaborative manipulator	Safe postures during rehabilitation treatments with 2 robots	Limit Range of Movement (LRM)

##### A. CoSMo Project

###### 1) Introduction of partners, project goals, relevant domain

The CoSMo project aimed to enable system integrators to efficiently perform the risk assessment for a potentially large number of cobot applications in industrial manufacturing. In particular, the solution focused on how an applications engineer can review and update the risk analysis of a robotic cell after it has been adapted to manufacture new products. The project included two partners, namely the CoR-Lab of Bielefeld University and the Weidmüller Interface GmbH & Co. KG. The CoR-Lab is interested in topics related to cognitive and social robots that interact intuitively with humans, while Weidmüller is a leading company in industrial connectivity.

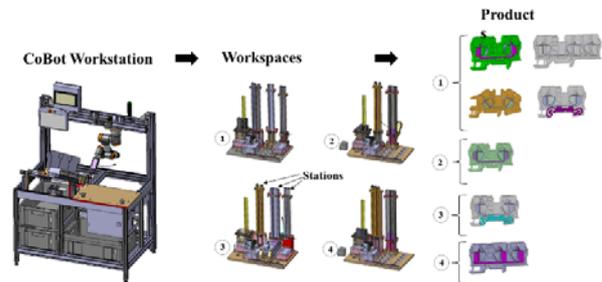

**Fig. 3.** Overview of the cobot workstation, different potential workspaces, and products associated with them. The various combinations can lead to potentially different hazards for a human working collaboratively in the workstation.

Weidmüller uses modular cobot workstations (see Fig. 3) to produce various types of terminal blocks from the product range. A dedicated goal is to minimize the time required for setting up and adjusting the machine to new products. This is achieved by using exchangeable workspaces, which can produce different types of terminals (see Fig. 3, right, Products). The robot with its attached gripper tool moves along the individual stations (max. 4) of the workspace (see Fig. 3, Workspaces 1-4) and is primarily used for material handling. An exemplary assembly process is explained in the following:

THMS-0386

a terminal insert is assembled from station to station and pressed into the terminal housing at the last station by using a pneumatic pressing device. The finished terminal is inspected by a camera and, if free of defects, is placed in the cardboard box. Otherwise, it is placed in the container for defective terminals via a metal chute. Then the process starts all over again. When the cardboard box is full, it is pushed via chute to a printing device, which prints the contents of the box on the label. The carton then slides over the carton chute to the removal point. If a different type of terminal can be produced by the already installed workspace, only the program of the production process is adapted. Otherwise, the modular workspace must be replaced, and the corresponding robot program must be loaded.

The basic frame of the machine is made of aluminum profiles. Furthermore, a UR3e robot from Universal Robots, a gripper from Zimmer, a camera from Cognex, a pressing device, a PLC, a touch display, and a Weidmüller workspace module are installed. Additionally, there are two carton chutes (infeed and outfeed of the machine) and a printing device for marking the carton labels.

The Universal Robot control software was used to program the UR3e robot arm, which also controls the connected gripper. The PCL is programmed with U-Create Studio, while Proconweb is used for the visualization of the touch display, which are software tools developed by Weidmüller. For quality control, the Cognex Insight Explorer camera software was used.

In general, the application has a high degree of variability. One workstation can be physically composed with different workspaces to produce a set of different products. The geometrical properties of the products combined with the properties of the tool (while being grasped and handled by the cobot), may result in potentially different risks.

## 2) Project outcome

CoR-Lab and Weidmüller did a comprehensive literature survey on normative safety requirements for modularized workstations to review the current state of the art and regulations for such installations. Based on this survey, a semi-automatic process as illustrated in Fig. 4 was sketched in the CoSMo project, extending on earlier ideas by [35], [36], [37], and [38] to reduce the effort of a risk analysis for cobot workstations. This process is based on the hypothesis that through the modularity of Weidmüller's robot workcell the complexity of the cobot workstation can be constrained by a dimension reduction that maps essential safety-relevant properties such as sharp geometries, edges and narrow distances of the modular elements as well as their composition into an abstract design space that allows simulation and reasoning. This space covers only the safety-relevant aspects required for the risk analysis, such as the geometrical abstractions, the typical human behavior, the robot behavior, and the overall (assembly) process. In that space, risks are analyzed, and risk reduction measures are applied in an iterative process to optimize the design configuration, until only acceptable risks remain. Finally, the physical set-up is adapted to the optimized abstract design and the COVR Protocols can be used to verify the risks and the effectiveness of the RRM's.

Within the CoSMo project, a model-based simulation of the

cobot workstation for a representative manufacturing process at Weidmüller and a risk analysis plugin were developed in Visual Components (VC) to interactively support hazard identification and risk mapping. Using knowledge about the safety properties of the modular elements of the system, the prototypical plugin supports to some extent an automatic analysis of potential risks for a particular configuration of the modular cobot workstation. For instance, an automatic process can be applied to find risks that are caused by not keeping minimal distances between the robot's tool and the elements with associated hazards in the workstation.

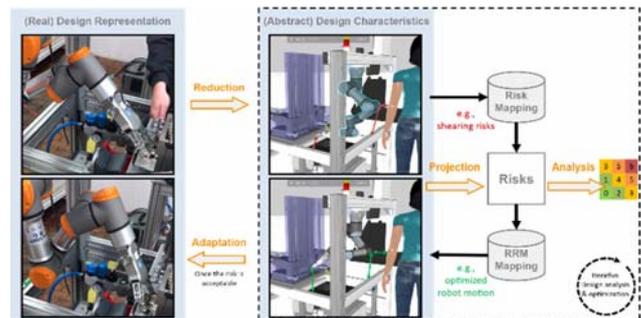


Fig. 4. Risk analysis process using composable safety models for risks and risk reduction measures.

Following these ideas, the Award beneficiaries believe that the safety of modular cobot workstations can be analyzed with respect to their safety aspects already during the digital design phase. This reduces the amount of necessary real-world construction iterations. In addition to that, the automatic hazard identification and risk analysis processes might lead to an automatic classification of configurations that stay within the already analyzed safety envelope of the system under nominal conditions.

## 3) Toolkit usage and feedback

In order to check the biomechanical limit values, there is currently no other option than to perform the corresponding measurements according to the protocols. Even with the usage of the developed risk analysis approach, the measurements require a comparably high personnel effort and are time-consuming. More practical would be a model-based simulation and analysis tool that could make the physical measurements obsolete. Further, the CoSMo consortium asked to add references in the protocols regarding the information on the measuring instruments, provided in the COVR Toolkit under "Test Equipment".

From the CoSMo perspective, the COVR Toolkit offered an excellent entry point for the safe design of cobot applications. The Document Finder is easy to use and provides a good overview of the guidelines, standards and protocols, thus, offering a suitable introduction to the subject for beginners. The protocols guide the user in a structured way through the measurement and show what to pay attention to. Following up on the ideas developed in CoSMo, strategies dealing with high variability, entailing many measurements and information on


THMS-0386

how to deal with hazardous situations that cannot be measured due to the dimensions of the measuring instruments or a contact area that is too large seem to be required for the manufacturing applications considered in this project.

### B. Hydrocobotics Project

#### 1) Introduction of partners, project goals, relevant domain

The Hydrocobotics project was aimed at the development of a safe cobotized solution to support operators in dealing with an indoor hydroponic culture. The issue belongs to the agricultural domain from a perspective still not covered by the standards, mainly characterized by the indoor environment. The solution was developed through the collaboration of three main partners: Hepenix Ltd. as a robot integrator, SZTAKI research and technology organization and Green Drops Farm Ltd. As an end-user focused on the commercialization of hydroponic culture solutions.

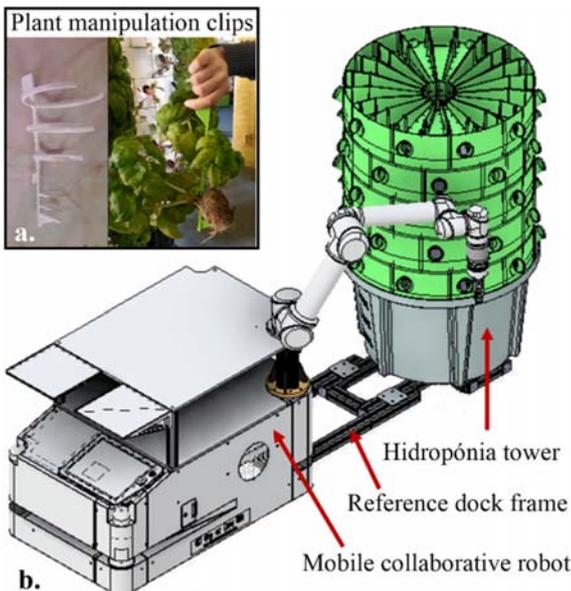

**Fig. 5.** a) Two versions of the developed clips for automated manipulation of the plants and b) overview of the collaborative application.

The base hydroponic system “Green Drops Hidropónia” developed by Green Drops Farm consists of a modular tower with an internal pump circulating the liquid; the modules have several cultivation layers, which feature holes for the insertion of mesh pots for plant cultivation. The tower can rotate within its base vase, permitting access to all the plants from one side by rotating the tower. The robotic apparatus consists of a serial manipulator universal Robots UR5 equipped with a Robotiq 2F-85 gripper and integrated onto an automated guided vehicle (AGV). This mobile cobot is able to move and operate autonomously in a workspace in which several Hidropónia towers may be included (see Fig. 5). Essential customized additions of the robotic solution are: i) a dock frame to be used as a reference for the positioning of the mobile robot with respect to the Hidropónia tower, ii) specific plant supports (so called “clips”) for the robotized manipulation of the plants and iii)

latch-based locking systems to fix the angular position of the tower during the manipulation of the plants. The obtained mobile robot is expected to move around in the workspace, approach the Hidropónia tower, and rotate the tower in order to access to any of the cultivation holes. Besides the development of a suitable and reliable robotic solution, the focus of the project was to assess the safety of the application, aiming at safe human-robot interaction.

#### 2) Project outcome

As an application belonging to the agricultural domain, but characterized by an indoor environment, there are currently no known domain-specific Type-C standards. As this situation is common to several emerging cobot applications, the decision was made to instead consider industrial robotics Type-C standards (i.e. ISO 10218-1 [39], ISO 10218-2 [40], ISO 3691-4, ISO/TS 15066). The risk assessment identified a series of hazards as the most critical from the perspective of workspace sharing and human-robot collaboration. These were analyzed and mitigated by appropriated risk reduction measures, as described in the following sub-sections.

##### i) Finger pinch hazard with gripper.

A careless operator may operate with their hands too close to robot gripper; due to the bar linkage-based structure of the gripper, the closing motion may pinch one or more operator fingers. This hazard was eliminated by applying a customized cover onto the gripper.

##### ii) Finger pinch hazard during locking with latch.

The finger of the operator may be pinched when the robot closes a mechanical latch. This hazard was also eliminated by applying a customized cover, preventing the insertion of the finger in the hazardous space.



**Fig. 6.** Impact test simulating the finger crush hazard with latch during rotation of the Hidropónia tower, with covers for risk reduction highlighted.

##### iii) Finger crush hazard with latch during the rotation of the Hidropónia tower.

When the cobot rotates the tower, a hand or finger may be crushed between the two parts of the mechanical latch. As a first risk reduction measure, an electromagnetic force and displacement sensor was developed and equipped as a mechanical interface between the robot and the gripper. Moreover, the crush scenario was tested by referring to COVR protocol “Test robot arm for collision with fixed object

THMS-0386

(crush)”, by using a GTE KMG 500-75 force gauge and Fujifilm prescale films for biofidelic force and pressure measurements, in order to compare the results with the safety thresholds reported in Appendix A of ISO/TS 15066 (see Fig. 6).

iv) *Hand injury hazard during plant loading and unloading with the plant support.*

This hazard is related to the possible impact of the plants with the hand during their manipulation performed by the robot. In this case, by using the same equipment of the test previously described, the COVR protocol “Test robot arm for collision with movable object (impact)” was considered. Although the results were significantly lower than the thresholds reported in [8] in the case of plant removal, the tests related to plant insertion exhibited the occurrence of scratches due to the break of the plant support, with the consequence that the measured pressures were above the acceptable thresholds. To mitigate this risk and keep contact pressures low, the plant support was re-designed, in order to break cleanly in case of impact at a specific zone of the clip.

### 3) *Toolkit usage and feedback*

The Toolkit was a fundamental source for the development of the project. In particular, the force and pressure tests that were executed for the validation of the hazardous human-robot contact scenarios were based on two protocols available on the Toolkit. These validation protocols build on an emerging testing approach for the validation of human-robot contact in different scenarios. Due to the importance of these issues in the viewpoint of HRC implementations, the COVR research group devoted great effort to the analysis of those testing procedures [41], resulting in reliable and comprehensive validation protocols that deal with several human-robot contact scenarios.

## C. *DOROTHY project*

### 1) *Introduction of partners, project goals, relevant domain*

The DOROTHY project was aimed at assessing the safety of a rehabilitation robot based on two industrial cobots. The REHAROB therapeutic system [42], which was the subject of the DOROTHY project has been developed in previous research projects and is based on two cobots which are generally used in industry. The two cobots attach to a patient’s elbow and wrist to execute movements programmed by a therapist (Fig. 7). The system is intended to be used for upper limb therapy of hemiparetic patients. The physiotherapist teaches the equipment by performing the relevant movements on the patient, which are then recorded and repeated by the device. The project was executed by DARPAMOTION Ltd. and Budapest University of Technology and Economics from Hungary.

Since requirements and circumstances regarding safety are very different in medical applications compared to cobots in industry, the Award project focused on uncovering the challenges and possibilities of using industrial cobots for a medical device. Based on a risk assessment, a safety validation protocol was developed for one of the identified risks, namely the risk of exceeding the anatomical range of motion or overreaching.

### 2) *Project outcome*

The REHAROB system is not the only medical device based on industrial cobots. An analysis of commercial and non-commercial robot systems was executed, describing three commercial medical robot systems using industrial robots (CyberKnife, ROSA, YOMI), eight commercial medical robot systems using industrial cobots (ARTAS iX, Sculptura, CARLO, TMS-Cobot, Modus V, iYU Pro, EMMA, ROBERT) and seven non-commercial medical robot systems using industrial cobots (ALEX, RAINER, Cobot for Doppler Sonography, DynamicDentalArm, BROCA, Chinese robot dentist, inRehaRob). Some of the main results of this analysis were:

- Industrial cobots are frequently used for the development of new medical systems as they are low in cost and support fast prototyping
- There is one medically certified cobot on the market, namely the KUKA LBR MED (KUKA AG, Augsburg, Germany). The advantage of using this medically certified cobot for new systems is the reduced need for engineering development time and testing. The disadvantages are the higher purchase cost compared to other industrial cobots and the undetermined intended use.
- The development process of medical systems is as individual as their application. Industrial cobots can be a simple and economical way to develop a medical robot that moves objects or body parts freely in space and is constrained under contact impedance.

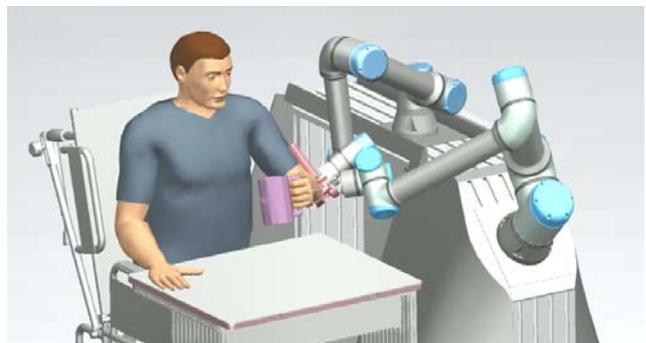


Fig. 7. Schematic drawing of the dual cobot arm therapeutic system.

One of the risks identified in the risk analysis was an unnatural joint angle in the wrist or elbow caused by improper trajectory calculation. During such a hazardous situation, the patient might suffer joint injuries. The Award beneficiaries decided to further investigate this risk and develop a safety validation protocol for the skill of limiting the joint’s range of motion. To reliably assess the human joint angles created by the robot trajectory, an instrumented dummy representing the patient’s arm was developed. The dummy arm is attached to a wooden frame at the dummy shoulder joint (Fig. 8). It consists of a 3D printed structure combined with rolling bearings with inner and outer aluminum bushings as joints.

The joints are equipped with rotary sensors and all necessary cables as well as the signal processing unit are routed through

THMS-0386

the inside of the dummy. Brake plugs and push-buttons are implemented for safe transportation, zero offset calibration and alteration of the system to represent left- or right-side anatomy. To account for a wide range of patient anthropometrics, the arm length and shoulder height can be adjusted from the 5th percentile female to 95th percentile male using the adjustment options in the frame for shoulder height adjustment and spring pre-loaded latches for arm length adjustment.



**Fig. 8.** Visualization and photo of the dummy limb test rig.

A safety validation protocol was then developed using this dummy arm and a self-developed data analysis sheet. The protocol user can determine the allowed ranges of joint motion and test a medical robot system's safety by employing the validation protocol in combination with the dummy and data analysis sheet. The joint ranges of motion are defined before the test as prohibited ranges and precaution zones. After the therapeutic motion exercises that are to be assessed were executed by the robot system connected to the dummy test rig, the data analysis sheet will present the protocol user with an overview of the movement durations in the riskless zone, precautionary zone and prohibited zone of all relevant joint angles. The safety validation is passed if the duration of prohibited zones in all angles is equal to 0%.

### 3) Toolkit usage and feedback

The Award beneficiaries used the Toolkit to collect information on cobot safety assessment and identified a missing link between device type and standards, which was then corrected.

An analysis of industrial cobot systems in medical systems was performed. A short summary of the analysis and a link to the complete analysis can be found in a case story on the COVR Toolkit.


The risk of overreaching and exceeding joint range of motion was identified as a risk that had not yet been addressed in the Toolkit protocols in combination with the robot type robotic arm. The Award beneficiaries then developed the safety validation protocol for this combination, defined the dummy arm as required test equipment, and provided the data analysis sheet as support for the protocol execution. This protocol and the information about the testing equipment are now available on Toolkit.

### D. Feedback and standardization activities

COVR Awardees and all Toolkit users were asked to anonymously provide feedback on the Toolkit and protocols via

custom-made online questionnaires. The Toolkit user survey has three main sections to 1) collect information about the respondent and their Toolkit usage, 2) to understand their satisfaction (via an abbreviated version of the Usability, Satisfaction and Ease of Use (USE) questionnaire [43]), and 3) to allow open-ended suggestions for improvement.


The questionnaires were used to systematically collect in-depth information about the usage and user experience of the various COVR elements.

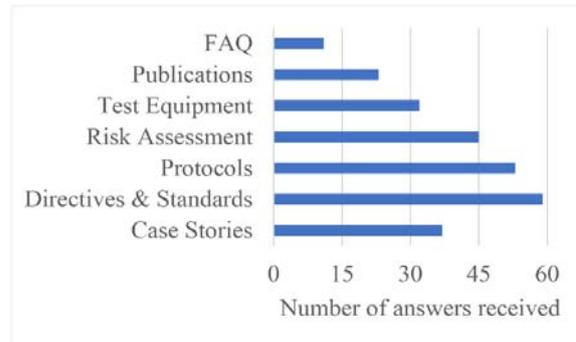

**Fig. 9.** Toolkit sections that were used or browsed by the respondents.


We received 75 responses through the online Toolkit user survey. The Toolkit was reportedly used regularly, with the subsections “Directives & Standards”, “Protocols” and “Risk Assessment” being viewed the most (Fig. 9).

Questions on whether and how much time was saved through using the Toolkit were introduced at a later point in time to the survey. Therefore, these questions only were answered by 37 respondents. Of these 37 respondents, 92% indicated that time savings were possible, with the majority estimating that the time saved is in the range of a few days (Fig. 10).

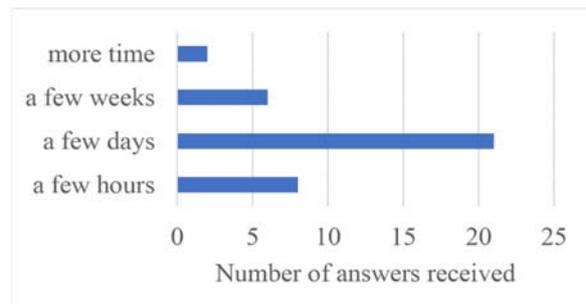

**Fig. 10.** Estimations regarding the time saved by using the Toolkit.

The survey questions focusing on usability indicate a positive appreciation of the Toolkit, with none (0%) of the respondents reporting that they are never satisfied by the quality of the tools and documents in the Toolkit (Fig. 11).

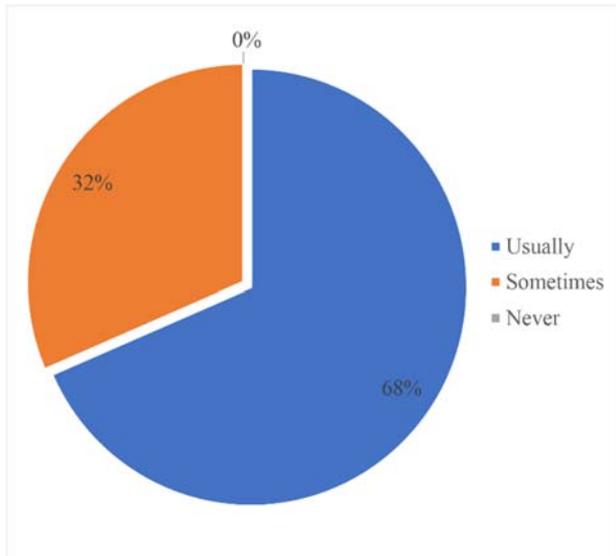

**Fig. 11.** Pie chart of questionnaire results regarding overall satisfaction with the COVR Toolkit.

Building on Toolkit contents, two separate standardization activities were initiated in late 2020. At the European level, a CEN-CWA (CEN Workshop Agreement) titled “Guidelines for the development and use of safety testing procedures in human-robot collaboration” was developed [6]. This document describes the motivation for cross-domain protocols and provides the overall structure of protocols so to support future developments. Furthermore, the the ISO/PAS (Publicly Available Specification) 5672 “Robotic devices - Test methods for measuring forces and pressures in human-robot contacts and collisions”, focusing on the protocol for measurement of power and force limited robots, was developed and is currently in the final commenting and approval phases. These activities have resulted in hundreds of individual comments from leading international experts on the concepts of the protocols and safety skills, as well as on the contents of specific protocols. The CEN-CWA was published in January 2022, and the ISO/PAS is expected to be published by the end of 2022.

## V. CONCLUSION

This paper deals with the topic of ensuring safety for new robotics applications featuring HRC. The cross-domain nature of robotics increasingly makes it difficult for robotics end-users and system integrators to identify relevant requirements, standards, and regulations.

The EU-funded project COVR has developed a web-based Toolkit designed to offer stakeholders with a wide range of background knowledge and expertise support along various phases of the development lifecycle. The Toolkit builds on the concept of safety skills to offer users a high degree of certainty regarding the relevant health and safety requirements, as well as practical guides for how to execute a risk analysis and how to perform system level validation measurements with various types of measuring equipment.

A major goal of COVR is building consensus with all relevant stakeholders, across Europe and the world. As new

technologies are emerging, the regulatory background will develop and existing standards will be modified or new documents will be developed. It is therefore pivotal to maintain and update the Toolkit. To address this challenge as the project ends, a community of so-called COVR Hubs is being created. The COVR Hubs members will maintain the Toolkit, offer services related to HRC validation and share best practices to ensure sustainability and continued engagement with the protocols in the near future. Through the COVR Hubs we will be able to continue the discussion with relevant stakeholders from standardization, occupational and health insurance, safety verification bodies, and national regulation agencies, and the robotics community.

## ACKNOWLEDGMENT

Authors are grateful to Janos Nacsa, David Szur and Kristof Abai from SZTAKI, Jozsef Toth from Hepenix Ltd and Greta Rácz from Green Drops Farm Ltd for their professional and successful development of the Hydrocobotics project. Authors are thankful to Dennis Wigand and Stefan Krüger from Bielefeld University and Mark Edler from Weidmüller Group for their professional consultancy and support of the CoSMo project. Authors also thank Szabolcs David and Al-Absi Ghassan Mohammed Ahmed Kaid from BME, Mark Otto Bauer and Tamas Patai from DARPAMOTION Ltd for their professional contribution to the DOROTHY project. I. P. Author thanks for the ED\_18-2-2018-0006 grant on "Research on prime exploitation of the potential provided by the industrial digitalisation".

## REFERENCES

- [1] Villani, V.; Pini, F.; Leali, F.; Secchi, C. Survey on human-robot collaboration in industrial settings: Safety, intuitive interfaces and applications. *Mechatronics* 2018, 55, 248–266.
- [2] IFR.World Robotic Report 2020. Available online: <https://ifr.org/ifr-press-releases/news/record-2.7-million-robots-work-in-factories-around-the-globe> (accessed on 27 May 2021).
- [3] Good Work Charter of the European Robotics Industry. EUnited Robotics. Available online: <https://www.eunited.net/eunited+aisbl/robotics/news/european-charter-for-robots-and-humans-released-by-engineering-association-eunited.html> (accessed on 25 May 2021).
- [4] Saenz, J., Lassen, A., Bidard, C., Burke, J. H., Nielsen, K., Schaake, L., et al. (2018). “COVR – towards simplified evaluation and validation of collaborative robotics applications across a wide range of domains using robot safety skills,” in 9<sup>th</sup> international conference on safety of industrial automated systems – SIAS 2018, Nancy, France, October 10-12, 2018.
- [5] Valori, M.; Scibilia, A.; Fassi, I.; Saenz, J.; Behrens, R.; Herbster, S.; Bidard, C.; Lucet, E.; Magisson, A.; Schaake, L.; Bessler, J.; Prange-Lasonder, G.B.; Kühnrich, M.; Lassen, A.B.; Nielsen, K.. 2021. "Validating Safety in Human-Robot Collaboration: Standards and New Perspectives" *Robotics* 10, no. 2: 65. <https://doi.org/10.3390/robotics10020065>.
- [6] CEN Workshop Agreement CWA 17835, Guidelines for the development and use of safety testing procedures in human-robot collaboration. European Committee for Standardization. January 2022. [https://www.cencenelec.eu/media/CEN-CENELEC/CWAs/RI/cwa17835\\_2022.pdf](https://www.cencenelec.eu/media/CEN-CENELEC/CWAs/RI/cwa17835_2022.pdf) Last accessed on July 13<sup>th</sup>, 2022.
- [7] ISO/TR 23482-1:2020. Application of ISO 13482—Part 1: Safety-Related Test Methods; International Organization for Standardization: Geneva, Switzerland, 2020.

- [8] ISO/TS 15066:2016. Robots and Robotic Devices—Collaborative Robots; International Organization for Standardization: Geneva, Switzerland, 2016.
- [9] European Parliament. Directive 2006/42/EC on Machinery; European Parliament: Brussels, Belgium, 2006.
- [10] European Parliament. Regulation (EU) 2017/745 on Medical Devices; European Parliament: Brussels, Belgium, 2017.
- [11] Bessler J., Prange-Lasonder G.B., Schaake L., Saenz J., Bidard C., Fassi I., Valori M., Lassen A.B. and Buurke J.H. (2021) Safety Assessment of Rehabilitation Robots: A Review Identifying Safety Skills and Current Knowledge Gaps. *Front. Robot. AI* 8:602878. doi: 10.3389/frobt.2021.602878.
- [12] Askarpour, M., Lestingi, L., Longoni, S. et al. Formally-based Model-Driven Development of Collaborative Robotic Applications. *J Intell Robot Syst* 102, 59 (2021). <https://doi.org/10.1007/s10846-021-01386-2>.
- [13] Yakymets, N., S. Dhoubi, H. Jaber, and A. Lanusse. 2013. "Model-Driven Safety Assessment of Robotic Systems." In 2013 IEEE/RSJ International Conference on Intelligent Robots and Systems, 1137–42.
- [14] Gualtieri, L., Rauch, E., and Vidoni, R. 2022. "Development and Validation of Guidelines for Safety in Human-Robot Collaborative Assembly Systems." *Computers & Industrial Engineering* 163 (January): 107801.
- [15] Zhou, L. et al., "Lower limb exoskeleton parasitic force modeling and minimizing with an adaptive trajectory controller," *Mech. Mach. Theory*, vol. 170, p. 104731, Apr. 2022, doi: 10.1016/j.mechmachtheory.2022.104731.
- [16] Zhou, L., Li, Y., and Bai, S. "A human-centered design optimization approach for robotic exoskeletons through biomechanical simulation." *Rob. Auton. Syst.*, vol. 91, pp. 337–347, May 2017, doi: 10.1016/j.robot.2016.12.012.
- [17] Agarwal, P., Narayanan, M. S. Lee, L.-F., Mendel, F. and Krovi, V. N. "Simulation-Based Design of Exoskeletons Using Musculoskeletal Analysis," in Volume 3: 30th Computers and Information in Engineering Conference, Parts A and B, Jan. 2010, pp. 1357–1364, doi: 10.1115/DETC2010-28572.
- [18] Tröster, M. Schneider, U., Bauernhansl, T. Rasmussen, J. and Andersen, M. S. "Simulation-Based Design of Exoskeletons for Active Upper Limb Exoskeleton Design Optimization Based on Musculoskeletal Modeling Simulation Framework for Active Upper Limb Exoskeleton Design Optimization Based on Musculoskeletal Modeling," in *Technische Unterstützungssysteme, die die Menschen wirklich wollen*, 2018, pp. 345–353.
- [19] Grabke, E. P., Masani, K. and Andrysek, J. "Lower Limb Assistive Device Design Optimization Using Musculoskeletal Modeling: A Review," *J. Med. Device.*, vol. 13, no. 4, Dec. 2019, doi: 10.1115/1.4044739
- [20] UK-RAS White papers "Agricultural robotics: the future of robotic agriculture". UK-RAS network, 2018. Available at: <https://arxiv.org/ftp/arxiv/papers/1806/1806.06762.pdf>
- [21] Zambon, I.; Cecchini, M.; Egidì, G.; Saporito M.G.; Colantoni A. Revolution 4.0: Industry vs. agriculture in a future development for SMEs. *Processes* 2019, 7, 36.
- [22] Benos, L.; Bechar, A.; Bochtis, D. Safety and ergonomics in human-robot interactive agricultural operations. *Biosystems engineering* 2020, 200, 55–72.
- [23] Cheein, F.A.; Herrera, D.; Gimenez, J.; Carelli, R.; Torres-Torriti, M.; Rosell-Polo, J.R.; Escolà, A.; Arnò, J. Human-robot interaction in precision agriculture: sharing the workspace with service units. 2015 IEEE International conference on industrial technology (ICIT), 17–19/03/2015, New York.
- [24] Lytridis, C.; Kaburlasos, V.G.; Pachidis, T.; Manios, M.; Vrochidou, E.; Kalampokas, T.; Catzistamatis, S. An overview of cooperative robotics in agriculture. *Agronomy*, 2021, 11, 1818. ISO/FDIS 10218-2:2020. Robotics—Safety Requirements for Robot Systems in an Industrial Environment—Part 2: Robot Systems, Robot Applications and Robot Cells Integration; International Organization for Standardization: Geneva, Switzerland, 2020.
- [25] ISO 3691-4:2020. Industrial Trucks—Safety Requirements and Verification—Part 4: Driverless Industrial Trucks and Their Systems; International Organization for Standardization: Geneva, Switzerland, 2020.
- [26] ISO 18646-1:2016. Robotics—Performance Criteria and Related Test Methods for Service Robots—Part 1: Locomotion for Wheeled Robots; International Organization for Standardization: Geneva, Switzerland, 2016.
- [27] ISO 18646-2:2019. Robotics—Performance Criteria and Related Test Methods for Service Robots—Part 2: Navigation; International Organization for Standardization: Geneva, Switzerland, 2019.
- [28] ISO 12100:2010. Safety of Machinery—General Principles for Design—Risk Assessment and Risk Reduction; International Organization for Standardization: Geneva, Switzerland, 2010.
- [29] ISO 1491:2020. Medical devices – Application of risk management to medical devices; International Electrotechnical Commission: Geneva, Switzerland, 2020.
- [30] ISO 60601-1:2005. Medical electrical equipment – Part 1: General Requirements for basic safety and essential performance; International Electrotechnical Commission: Geneva, Switzerland, 2005.
- [31] IEC 80601-2-77:2021. Medical electrical equipment – Part 2-77: Particular requirements for the basic safety and essential performance of robotically assisted surgical equipment; International Electrotechnical Commission: Geneva, Switzerland, 2021.
- [32] IEC 80601-2-78:2020. Medical electrical equipment – Part 2-78: Particular requirements for basic safety and essential performance of medical robots for rehabilitation, assessment, compensation or alleviation; International Electrotechnical Commission: Geneva, Switzerland, 2020.
- [33] Saenz, J. et al., "COVR Toolkit – Supporting safety of interactive robotics applications," 2021 IEEE 2nd International Conference on Human-Machine Systems (ICHMS), 2021, pp. 1–6, doi: 10.1109/ICHMS53169.2021.9582659.
- [34] Jönsson, R., Van Rompaey, L., "COVR – Legal Risk Assessment (LEGARA) – White Paper" [https://covrfilestorage.blob.core.windows.net/documents/protocols%5CD21\\_COVR\\_COPLAY\\_final%20white%20paper\\_100321.pdf](https://covrfilestorage.blob.core.windows.net/documents/protocols%5CD21_COVR_COPLAY_final%20white%20paper_100321.pdf), Last accessed on December 13<sup>th</sup>, 2021.
- [35] Awad, R., Fechter, M., and van Heerden, J. "Integrated risk assessment and safety consideration during design of HRC workplaces," *2017 22nd IEEE International Conference on Emerging Technologies and Factory Automation (ETFA)*, 2017, pp. 1–10, doi: 10.1109/ETFA.2017.8247648.
- [36] Vicentini, F., Askarpour, M., Rossi, M.G. and Mandrioli, D. "Safety Assessment of Collaborative Robotics Through Automated Formal Verification," in *IEEE Transactions on Robotics*, vol. 36, no. 1, pp. 42–61, Feb. 2020, doi: 10.1109/TRO.2019.2937471.
- [37] Inam, R., Raizer, K., Hata, A., Souza, R., Forsman, E., Cao, E., Wang, S. "Risk Assessment for Human-Robot Collaboration in an automated warehouse scenario," *2018 IEEE 23rd International Conference on Emerging Technologies and Factory Automation (ETFA)*, 2018, pp. 743–751, doi: 10.1109/ETFA.2018.8502466.
- [38] Saenz, J., Elkmann, N., Gibaru, O. and Neto, P. 2018. Survey of methods for design of collaborative robotics applications- Why safety is a barrier to more widespread robotics uptake. In *Proceedings of the 2018 4th International Conference on Mechatronics and Robotics Engineering (ICMRE 2018)*. Association for Computing Machinery, New York, NY, USA, 95–101. DOI: <https://doi.org/10.1145/3191477.3191507>
- [39] ISO 10218-1:2011. Robots and Robotic Devices—Safety Requirements for Industrial Robots—Part 1: Robots; International Organization for Standardization: Geneva, Switzerland, 2011.
- [40] ISO 10218-2:2011. Robots and Robotic Devices—Safety Requirements for Industrial Robots—Part 2: Robot Systems and Integration; International Organization for Standardization: Geneva, Switzerland, 2011.
- [41] Scibilia, A., Valori, M., Pedrocchi, N., Fassi, I., Herbster, S., Behrens, R., Saenz, J., Magisson, A., Bidard, C., Kunrich, M., Lassen, A.B., Nielsen, K. 2021. Analysis of Interlaboratory Safety Related Tests in Power and Force Limited Collaborative Robots. *IEEE Access* 9. doi: 10.1109/ACCESS.2021.3085109
- [42] Peter, O., Tavaszi, I., Toth, A., and Fazekas, G., "Exercising daily living activities in robot-mediated therapy," *J Phys Ther Sci*, 29(5), pp. 854–858, 2017, DOI: 10.1589/jpts.29.854
- [43] Lund, A. M. "Measuring Usability with the USE Questionnaire," *Usability Interface*, vol. 8, no. 2, pp. 3–6, 2001.



**José Saenz** earned a B.S. in mechanical engineering from Stanford University (USA) in 1999, a M.S. in mechatronics from Otto von Guericke University Magdeburg (Germany) in 2004, and a Doctorate in Automation from the École Nationale Supérieure d'Arts et Métiers (France) in 2019. He is the group leader of the group Assistance,

Service and Industrial Robotics in the Business Unit Robotic Systems and has been at the Fraunhofer Institute for Factory Operation and Automation in Magdeburg (Germany) since 2000. His main research interests are in the fields of safe human robot collaboration, mobile manipulation, inspection and cleaning service robots, and safety sensor development.



**Julie Bessler-Etten** holds a MSc degree in Human Technology in Sports and Medicine (2018) from the German Sports University Cologne (Germany). She is a junior researcher and PhD student at Roessingh Research and Development in Enschede (Netherlands). Her main research

interests are in the fields of rehabilitation technologies, physical human-robot interaction and safety of rehabilitation robotics.



**Marcello Valori** holds a Ph.D (2014) and a M.Sc. degree in Mechanical Engineering (2010) from Polytechnic University of Bari. In 2012-13, he was with the Robotics and Mechatronics Group of the University of Twente (NL) as a visiting researcher. In 2014-15, he was with an enterprise as internal sales engineer. In 2016, he joined the Institute of Intelligent

Industrial Technologies and Systems for Advanced Manufacturing of the National Research Council of Italy (STIIMA CNR), where he currently works as a researcher. He is involved in several research projects, with technical and management roles. His current research interests concern safety aspects of collaborative robotics, strategies and devices for assemblies in the electronics field, and the combined rapid manufacturing of functional components.



**Gerdienke B. Prange-Lasonder** is a Human Movement Scientist, with a PhD in the evaluation of robotic devices for rehabilitation of the arm after stroke earned from the University of Twente, Enschede, Netherlands (2009). As senior researcher at Roessingh Research and Development in

Enschede (Netherlands), she currently leads the research topic on therapeutic rehabilitation technology (Active Therapeutic

Devices), involving supervision of 6 PhD students. She coordinates and supervises multiple European and national projects, in particular regarding clinical evaluation, collaborating extensively with care organisations, technical universities and companies. Her research is focused on applying technology for improvement of arm and hand functionality in clinical practice or at home, evaluating its impact and understanding associated neurological and biomechanical working mechanisms.



**Irene Fassi** holds a Ph.D. (2001) in Industrial Technologies and a MSc degree in Mechanical Engineering (1997) from Politecnico di Milano. Since 1998 she is a full time researcher at CNR-ITIA (now CNR-STIIMA), where she founded and leads the research group MEDIS. She is adjunct professor at University of Brescia and Politecnico di Milano for

robotics, precision engineering and advanced manufacturing systems. She is a member of the Executive Board of SIRI (Italian Robotics and Automation Association), of AITeM (Italian Association of Manufacturing Technologies), of the ASME/DED Technical Committee on Micro and Nano Manufacturing, and currently serves as President elect for the International Institution for MicroManufacturing.



**Catherine Bidard**, Phd in Robotics in 1994 (Lyon) works in CEA robotics laboratories since 1991. Her main expertise is on Robot kinematics design, dynamic modelling and simulation, dynamic identification, control for active assist devices. She has been involved in several developments of robotics arms for telerobotics, haptic interfaces, active exoskeletons and intelligent assist devices. She is currently involved in several projects focusing on the ergonomics and safety assessment of collaborative robots and active assist devices.



**Aske Bach Lassen** graduated with an Electrical and Electronic Engineering background in 2014 and worked as a consultant in KPMG Denmark and AX Specialists prior to his employment at DTI. Aske Bach Lassen joined the Danish Technological Institute (DTI)'s Centre for Robot Technology in 2017. He is currently working as project leader within robotics projects whilst coordinating the H2020 funded projects, including projects such as Robott-Net and COVR.

Furthermore, Aske manages DTI contributions to the EU mega-projects like the RobotUnion and DIH-World project.



**Imre Paniti** is a Research Fellow at the Institute for Computer Science and Control, Research Laboratory on Engineering & Management Intelligence and a researcher at the Research Center of Vehicle Industry, Széchenyi István University. He received both his MSc in Mechanical

Engineering and PhD at the Budapest University of Technology and Economics (BME, Budapest, Hungary), in 2007 and 2015, respectively. He is also a supervisor at the BME, Doctoral School of Mechanical Engineering, Department of Manufacturing Engineering as well as a public board member of the Hungarian Academy of Sciences. His main research interests are in Incremental Sheet Forming, smart manufacturing, Human-Robot Collaboration, digital twins and cyber-physical systems. Dr. Paniti also acts as the national coordinator for EU Robotics Week, organized by euRobotics.



**Andras Toth** holds a M.Sc. degree in Mechanical Engineering (1990) from the Technical University of Budapest (BME, Budapest, Hungary). In 1990-3, he was with the Hungarian Academy of Sciences of Budapest (HU) as a scientific scholarship holder. In 1993 he joined the Department of Manufacturing Engineering

of the Technical University of Budapest (BME, Budapest, Hungary), where he currently works as a researcher.

Since 1996 he has been involved in seventeen EU/international and seven national research projects related to industrial/service robotics and manufacturing automation. His current research interests concern industrial and health robotics, focusing on robot simulation and programming, robot-assisted upper limb rehabilitation, robotized product assembly.

Mr. Toth is a member of the Hungarian Biomechanics Society and works as an expert to the Hungarian Standards Institution.



**Tobias Stuke** holds a MSc degree in mechanical engineering from Leibniz Universität Hannover (Germany) in 2016. He works as an automation engineer at Weidmüller Group (Germany) where he is pre-developing innovative production technology including cobot applications for

industrial assembly. Since 2021 he enrolled as a PhD student at Technical University Illmenau (Germany). His research aims at improving robotic bin picking for industrial utilization at scale.



**Sebastian Wrede** holds a PhD in computer science (2008) and is a senior researcher (tenured) leading the Cognitive Systems Engineering group at the Technical Faculty of Bielefeld University (Germany). Since 2019, he serves as managing director of CoR-Lab. His research focuses on the transfer and improvement of software and systems engineering methods for

model-driven development as well as analysis of robot systems with adaptive behaviour at design and runtime. Recently, he was PI and WP leader in several projects such as the European Union IST projects FP7 AMARSi as well as H2020 CogIMon and of two RobMoSys ITP cascaded-funding projects on model-based design, simulation and integration of robot systems. Dr. Wrede is an associate editor for robotics systems at IEEE RA-L and is one of the organizers of the Model-driven Robot Software Engineering (MORSE) workshop series.

**Kurt Nielsen** received his Master in Robot Technology from University of Southern Denmark in 2005. Prior to his employment at DTI he worked in a start-up company called Intelligent Welding Automation (IWA). Kurt Nielsen joined the Danish Technological Institute (DTI)'s Centre for Robot Technology in 2008, starting as a robot developer. Kurt is now Director of the Robotics Centre at DTI and has more than 10 years of experience in managing robotics research following 3 years in industry. Kurt is currently leading a team of about 45 researchers and consultants within industrial and service robotics.

