



**HAL**  
open science

## Study of a glass-ceramic seal: porosity and crystallization

Rémi Moles, Annabelle Laplace, Emma Blondeau, Jean-Gabriel Begos, Karl Vulliez

► **To cite this version:**

Rémi Moles, Annabelle Laplace, Emma Blondeau, Jean-Gabriel Begos, Karl Vulliez. Study of a glass-ceramic seal: porosity and crystallization. ICG SpringSchool 2024 - Glass for a sustainable future, Apr 2024, Lloret de Mar, Espagne. cea-04750819

**HAL Id: cea-04750819**

**<https://cea.hal.science/cea-04750819v1>**

Submitted on 23 Oct 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Study of a glass-ceramic seal: porosity and crystallization

Rémi MOLES<sup>1</sup>, Annabelle LAPLACE<sup>1</sup>, Emma BLONDEAU<sup>1</sup>, Jean-Gabriel BÉGOS<sup>1</sup>, Karl VULLIEZ<sup>2</sup>

<sup>1</sup> CEA, DES, ISEC, DPME, Univ. Montpellier, Laboratoire de Formulation et Caractérisation des Matériaux Minéraux, Marcoule, France

<sup>2</sup> Univ. Grenoble Alpes – CEA/LITEN, 38054, Grenoble, France

Sealing is a major issue in High Temperature Electrolyzers (HTE) used for hydrogen production. The specifications that seals must meet are particularly demanding (thermal and chemical resistance, thermal expansion coefficient, electrical resistivity, viscosity...). These numerous constraints lead to the use of glass powder suspended in organic solvents, which is heat-treated to form a glass-ceramic seal.

Objectives of the study are to characterize and model the microstructure (porosity and crystallization) of the glass-ceramic seal. Indeed, a large and interconnected porosity can decrease the sealing properties. Moreover, a dense material will, a priori, be mechanically more resistant than a porous one. Finally, the crystallization may have a significant effect on the mechanical properties (resistance, tenacity, viscosity, hardness...).

The evolution of the microstructure as a function of temperature and duration of the heat treatment has been determined. Different crystals have been identified by X-Ray Diffraction (XRD) and electron microprobe. The crystalline surface fraction of the main phase has been determined by image analysis of SEM pictures using BackScattered Electron (SEM-BSE) detector. Its evolution has been modeled using a JMAK (Johnson-Mehl-Avrami-Kolmogorov) model which allowed to determine the crystallization kinetics. The evolution of porosity (percentage, mean diameter, number of pores) has been determined by image analysis of Scanning Electron Microscopy pictures using Secondary Electron detector (SE-SEM). This paper will present the obtained results.

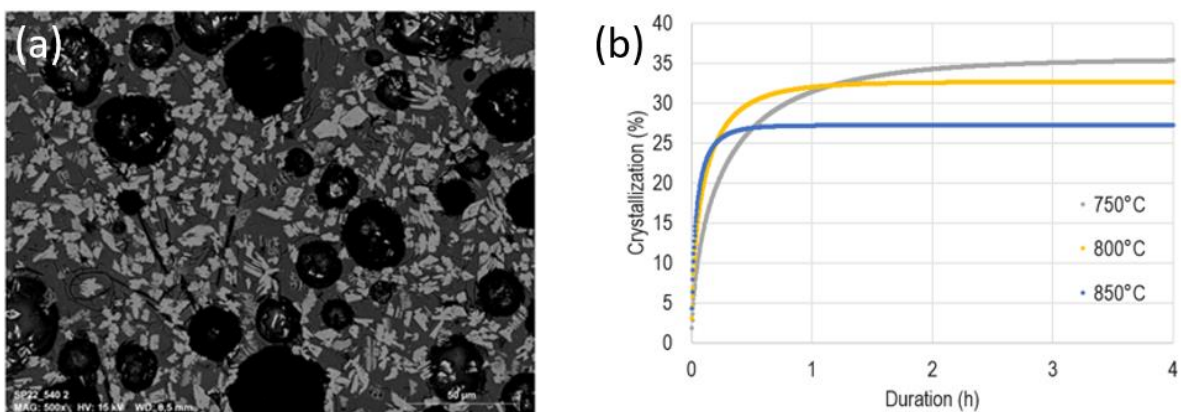


Figure 1 : (a) SEM-BSE picture of the glass-ceramic after heat treatment (b) Evolution of the surface crystalline fraction with time and temperature