



**HAL**  
open science

## Function Learning with Carbon Nanotube-based Synapses

V. Derycke, K Gacem, J-M Retrouvey, D Chabi, G. Agnus, D. Brunel, T. Cabaret, L. Fillaud, O. Segut, A. Filoramo, et al.

► **To cite this version:**

V. Derycke, K Gacem, J-M Retrouvey, D Chabi, G. Agnus, et al.. Function Learning with Carbon Nanotube-based Synapses. Nano and Giga Challenges in Electronics, Photonics and Renewable Energy, Mar 2014, Tempe, United States. cea-02362633

**HAL Id: cea-02362633**

**<https://cea.hal.science/cea-02362633>**

Submitted on 15 Nov 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Function Learning with Carbon Nanotube-based Synapses

V. Derycke,<sup>1,\*</sup> K. Gacem,<sup>1</sup> J-M. Retrouvey,<sup>2</sup> D. Chabi,<sup>2</sup> G. Agnus,<sup>1</sup> D. Brunel,<sup>1</sup> T. Cabaret,<sup>1</sup> L. Fillaud,<sup>1</sup> O. Segut,<sup>1</sup> A. Filoramo,<sup>1</sup> W. Zhao,<sup>2</sup> C. Gamrat,<sup>3</sup> B. Joussetme,<sup>1</sup> J-O. Klein<sup>2</sup>

<sup>1</sup>CEA Saclay, IRAMIS, F-91191 Gif sur Yvette, France, <sup>2</sup>IEF, Université de Paris-Sud, UMR 8622, Orsay, F-91405 and CNRS, Orsay, France, <sup>3</sup>CEA Saclay, LIST, F-91191 Gif sur Yvette, France

The principle of using nanoscale memory devices as artificial synapses in neuromorphic circuits is recognized as a promising way to build new circuit architectures tolerant to defects and variability. Yet, actual experimental demonstrations of neural network type of circuits based on non-conventional/non-CMOS memory devices and displaying function learning capabilities remain very scarce. We recently showed that carbon-nanotube based memory elements can be used as artificial synapses, combined with conventional neurons and trained to perform functions through the application of a supervised learning algorithm [1].

This work is based on photosensitive carbon nanotube transistors called OG-CNTFETs (optically gated carbon nanotube FETs) that we studied in details first as photo-detectors and then as memory devices [2,3]. We then showed that these devices can be used as resistive memory elements [4] and proposed ways to implement them to store synaptic weights in neural network circuits [5,6]. The propose implementation is ideally suited for the parallel learning of multiple functions in a crossbar array of OG-CNTFETs as shown by simulations [6].

At the experimental level, using devices not scaled down, we also showed that the same ensemble of 8 devices can be trained multiple times to code successively any 3-input linearly separable Boolean logic function despite device-to-device variability. This work represents one of the very few demonstrations of actual function learning with synapses based on nano-scale building blocks [1]. The potential of such approach for the parallel learning of multiple and more complex functions will be discussed. Finally we explored the scalability of

such strategy by evaluating programming speed [7] and size issues [8] in single-nanotube based devices.

Such use of 3-terminal devices as resistive memory elements, while powerful from a function learning perspective, also presents limitations in terms of ultimate scaling. We thus turned to the study of 2-terminal memristors incorporating carbon nanotubes (not as switching medium, but as nano-scale electrodes) [9]. In this presentation, the pros and cons of both approaches will be compared.

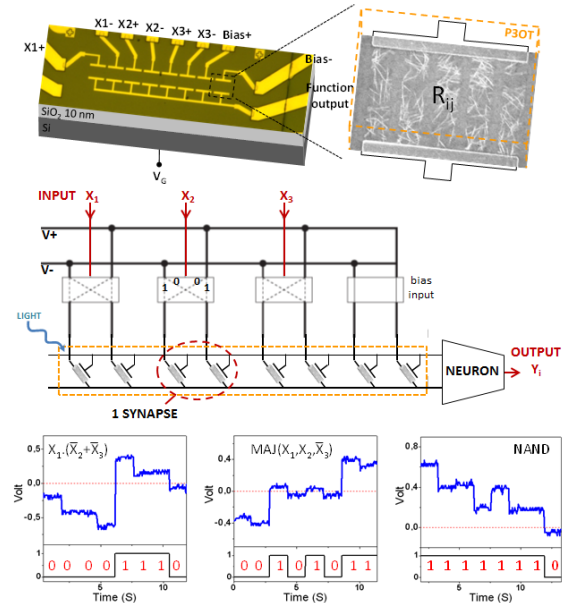


Fig. 1 (top) optical microscope image of a line of OG-CNTFETs based on carbon nanotube networks and SEM image of one such device. (middle) principle of the learning circuit with differential inputs and conventional electronics as neuron. (bottom) example of 3 particular 3-input logic functions learned successively by the same series of CNT-devices [1].

This work is/was supported by the French ANR (Panini ANR-07-ARFU-008 and Moorea ANR-12-BS03-004 Projects), the C'NANO IdF (Cinamon Project) and the EU (Nabab Project FP7-216777).

- [1] K. Gacem et al., *Nanotechnology* **24**, 384013, (2013)
- [2] J. Borghetti et al., *Adv. Mater.* **18**, 2535 (2006)
- [3] C. Anghel et al., *Nano Lett.* **8**, 3619 (2008)
- [4] G. Agnus et al., *Adv. Mater.* **22**, 702 (2010)
- [5] W. Zhao et al., *Nanotechnology* **21**, 175202 (2010)
- [6] Liao et al, *IEEE Trans. Circ. Syst.* **58**, 2172 (2011)
- [7] G. Agnus et al., *Small* **6**, 2659 (2010)
- [8] D. Brunel et al., *Adv. Funct. Mater.* (2013), in press (10.1002/adfm.201300775)
- [9] Cabaret et al., *submitted*.

\* Email: vincent.derycke@cea.fr