



# Transparent PZT piezoelectric membranes for MEMS applications

Franklin Pavageau, Christel Dieppedale, Catherine Brunet-Manquat,  
Christophe Licitra, Antoine Hamelin, Fabrice Casset, Gwenael Le Rhun

## ► To cite this version:

Franklin Pavageau, Christel Dieppedale, Catherine Brunet-Manquat, Christophe Licitra, Antoine Hamelin, et al.. Transparent PZT piezoelectric membranes for MEMS applications. ISAF 2022, Jun 2022, Tours, France. cea-03748013

**HAL Id: cea-03748013**

**<https://cea.hal.science/cea-03748013>**

Submitted on 9 Aug 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Transparent PZT piezoelectric membranes for MEMS applications

Franklin Pavageau\*, Christel Dieppedale, Catherine Brunet-Manquat, Christophe Licitra,  
Antoine Hamelin, Fabrice Casset and Gwenael Le Rhun  
CEA-Leti, Université Grenoble Alpes, F-38000 Grenoble, France  
\*franklin.pavageau@cea.fr

Lead zirconate titanate (PZT) is the most powerful piezoelectric material, especially for microactuator applications. The PZT based MEMS technology is today well established and mastered in industry. Thin film piezoelectric stacks are deposited onto silicon substrate and implement nontransparent layers (electrodes, metallization). One current great challenge is to integrate PZT, or other piezoelectric materials like AlN, in transparent MEMS devices for various application domains that may require transparency like haptics, human-machine interface, acoustics, selfcleaning. However, the crystallization at around 650-700°C of the PZT film does not allow it to be deposited directly on an SiO<sub>2</sub> membrane and / or transparent electrode, such as ITO. PZT films are indeed most often grown on platinized Si substrate. A solution to this problem is to transfer the PZT thin film, together with a transparent electrode deposited on top of it, from a growth Pt/Si substrate to a host substrate (transparent or not), following a process recently developed [1]. We report here for the first time the realization of fully transparent ITO/PZT/ITO parallel plate capacitor on SiO<sub>2</sub> membrane, obtained by layer transfer process (Figure 1). The piezoelectric membranes obtained on 200 mm Si wafer are electrically functional and show average transparency of 75% in visible spectrum. The actuation of membranes was demonstrated and measured under applied voltage. This proof of concept opens the way to the fabrication of transparent Piezoelectric Micromachined Ultrasonic Transducers (PMUT) devices for fingerprint application or else.

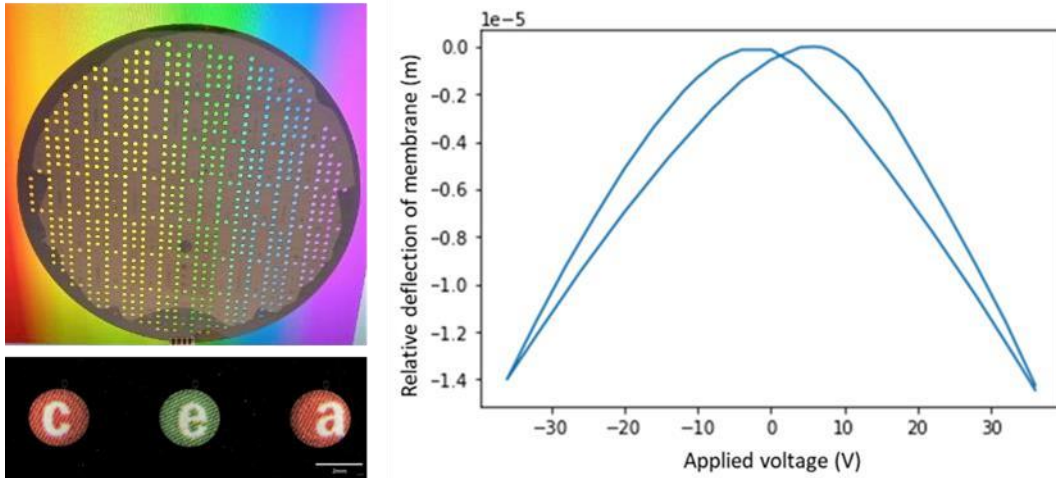


Figure 1: photography of transparent PZT based membranes on 200 mm Si wafer, and displacement Vs voltage curve of a disk actuator membrane.

## References

- [1] G. Le Rhun et al., *Proc. IEEE TRANSDUCERS 2019*, pp. 1800-1802