







DE LA RECHERCHE À L'INDUSTRIE


Babylone: R&D program for French Bituminized Waste Products acceptability in deep geological repository

GLOBAL 2022, July 6 - 8 2022, Reims, France

P. Vigneron, J-B Champenois, P. Jourda, C. Alameda Angulo, S. Granet, S. Schumacher





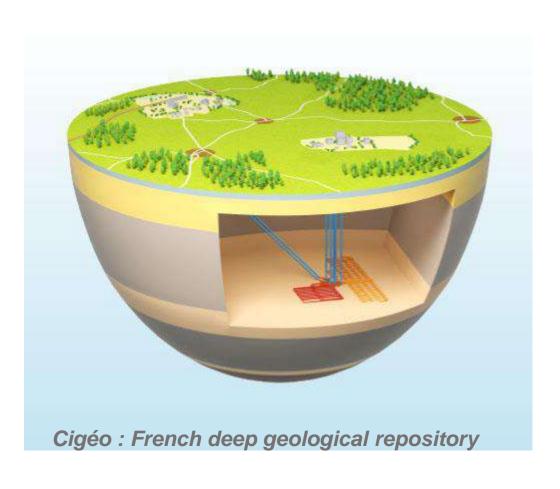

▶ Introduction

▶ Babylone R&D program

- BWPs thermal reactivity
- BWPs thermal behaviour
- BWPs long-term behaviour in repository

▶ Conclusion




French Bituminized Waste Products (BWPs)

- ▶ Production started in the 1960's and still goes on
 - Waste characteristics evolve over time

► Issued from co-precipitation sludges related to reprocessing nuclear spent fuels

- **▶** Several inorganic reagents
 - Co-precipitation salts: Fe(OH)₃, BaSO₄...
- ► Specific bitumen quality: 70/100
- ► Produced by extrusion to have an homogenous mixture

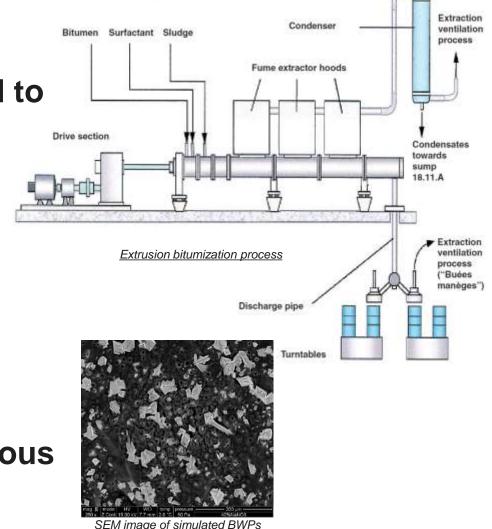



French BWPs location

French BWPs have been produced on 2 sites:









► Marcoule: interim storage of ~ 62 000 drums







Issues of BWPs acceptability in deep geological repository (Cigéo)

2 main issues to be tackled:

- During the exploitation period: BWPs behaviour subsequent to thermal stress (fire case)
- Over the exploitation period: BWPs long-term behaviour (~ 100 000 y)
 when water will resaturate disposal cells

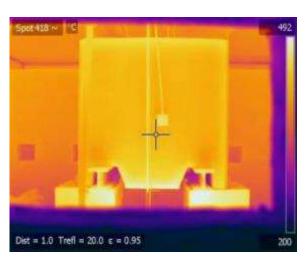

<u>Heating in an oven of a concrete container</u> filled with simulated BWPs drums

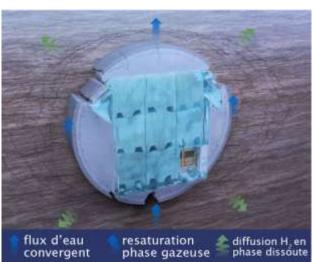

Over 100 000 y : water resaturates disposal cells and hydraulic equilibrium is recovered



The R&D global strategy

A complementary approach based on:

- Phenomenologic knowledge
- Modeling & simulation
- Experiments

Description of physical phenomena



BWPs behaviour modeling



BWPs behaviour numerical simulation



Experiments



Physical constants acquisition



Babylone: four-party R&D program

Partners: Andra, CEA, EDF, Orano


Duration: 2020 - 2026


3 Topics:

▶ BWPs thermal reactivity


BWPs thermal behaviour

▶ BWPs long-term behaviour in repository

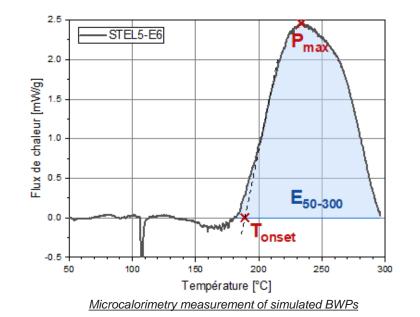



Tomography image of simulated
BWPs free leaching test

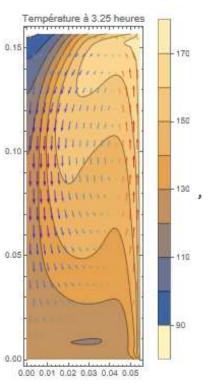

Thermohydraulic simulation of BWPs in a wall-heated 2L vessel




BWPs thermal reactivity

French BWPs described by 6 composition domains Energy, Power and T_{onset} previously acquired with experimental designs

What is foreseen in Babylone:

- ► To assess uncertainties
- ► To establish envelope curves of chemical reactivity
- ► To figure out data on real BWPs by sampling drums in La Hague and Marcoule

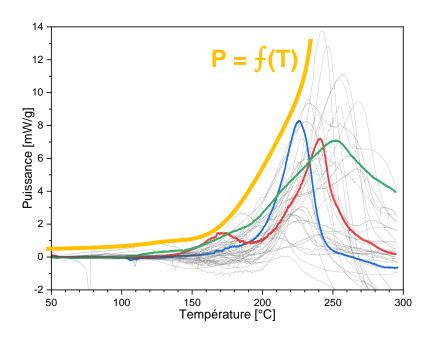

<u>Example of superimposed thermograms</u> <u>in order to define envelop curves</u>



BWPs thermal behaviour

Previously studies on just-made non-radioactive BWPs and conservative approach modeling based on conduction phenomenon

What is foreseen in Babylone:


- ▶ To study the effect of radiolytic ageing on BWPs thermal behaviour:
 - External irradiation of non-radioactive BWPs at different doses
 - Physico-chemical constants acquisition of these materials
 - Influence of the presence of H₂ gas bubbles
 - Influence of doses equivalent to 200 years ageing
- ► To validate BWPs thermohydraulic modeling with thermal stress experiments on drum scale



Example of 2L vessel for heating tests of simulated BWPs




BWPs long-term behaviour in repository

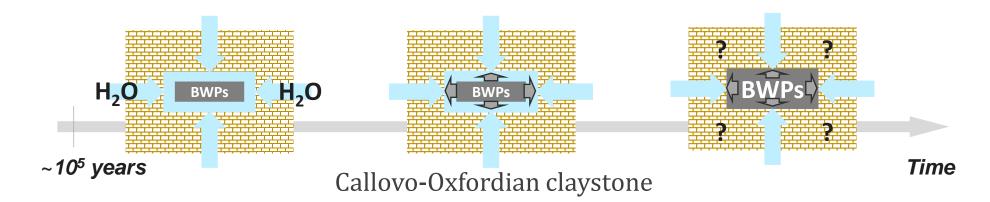

Babylone: R&D program for French BWPs acceptability in deep geological repository - P. Vigneron &al.

- Osmotic phenomenon → Water uptake
- Salts leaching
- Swelling

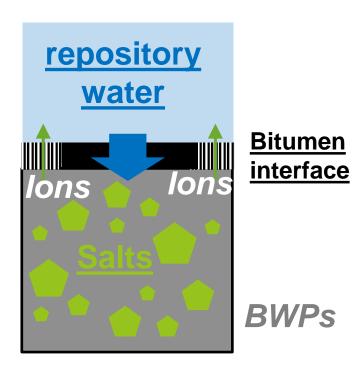

10





BWPs long-term behaviour in repository

Previously conservative approach: maximum of the theoretical BWPs swelling pressure applied on the disposal cell wall and considered as constant in time

What is foreseen in Babylone:

- ► To collect experimental data related to leaching BWPs behaviour in volume- or stress-constrained conditions
- ► To build a hydromechanical model with these data
- ► To simulate Callovo-Oxfordian behaviour under BWPs swelling stress

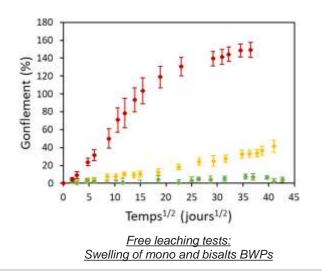

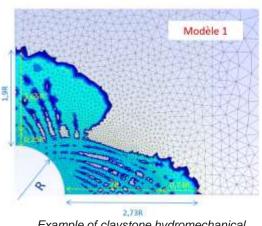

Example of claystone hydromechanical simulation under BWPs swelling stress

11



Conclusion

Andra, CEA, EDF and Orano have launched a R&D program on BWPs for a period of 6 years.

Its main objectives are:

- ► To confirm the design and implementation of disposal cells and to increase safety margins during the operation of disposal cells
- ▶ To consolidate the safety assessment during BWPs disposal
- ▶ To increase safety margins during BWPs disposal

Thank you for your attention









P. Vigneron¹, J-B Champenois¹, P. Jourda¹, C. Alameda Angulo², S. Granet³, S. Schumacher⁴

¹ CEA, ² Orano, ³ EDF, ⁴ Andra